

Final Report to California Department of Food and Agriculture

# **Develop Field Management Practices to Reduce Soil Fumigant Emissions**

By

Suduan Gao

Tom Trout

Ruijun Qin

USDA-ARS, Water Management Research  
San Joaquin Valley Agricultural Sciences Center  
9611 S. Riverbend Ave.  
Parlier, CA 93648

for

David Luscher and Charlie Goodman  
Office of Pesticide Consultation and Analysis, California Department of Food and  
Agriculture, Sacramento, CA 95814

June 30, 2010

## **Disclaimer**

This project reports research funded by the California Department of Food and Agriculture under Contract no. 58-5302-6-102 (October 1, 2005 through September 30, 2008). The final report was not completed prior to the end date as a result of suspension of the project in July 2008 due to state financial budget decisions. Under a new contract no. 58-5302-9-450, the major task was to complete this final report of the work conducted under the previous contract. It should also be noted that by the time this report is written, most of the work has been published in peer-reviewed journals, proceedings, and abstracts for presentations at meetings. The aim of this report is to synthesize all experimental data to achieve the project goal. Mention of trade names or commercial products does not imply endorsement by the USDA, Agricultural Research Service.

## **Acknowledgements**

Drs. Sally Schneider, Bradley Hanson, James Gerik and Dong Wang participated in some of the field trials reported under this project by either conducting parallel pest control investigations or providing help in field trials. Dr. Jason McDonald conducted one year postdoctoral research from 2006 to 2007 under this project.

Technical assistance in field preparation/sampling and lab analytical work was received from Robert Shenk, Allison Kenyon, Tom Pflaum, Jim Gartung, Nancy Goodell, Stella Zambrzuski, Aileen Hendratna, Ashley Torres, Curtis Koga, Matthew Gonzales, Patty Mungur, and Amanda Crump as well as Carl Hawk with his field support personnel in the San Joaquin Valley Agricultural Sciences Center, USDA-ARS, Parlier, California.

TriCal Inc., Hollister, CA provided fumigants, plastic materials and fumigant application services for all field trials.

## Abstract

The phase out of methyl bromide (MeBr) has raised many challenges to major commodities in California. These challenges include the use of alternative fumigants that are often more difficult to apply and less efficacious compared to MeBr and the increasingly stringent environmental regulations on fumigant use because of emissions. The goal of this project was to develop effective and feasible field management practices to reduce fumigant emissions while achieving good soil pest control. Three sets of laboratory experiments and three field trials were conducted from October 2005 through 2007 to determine the effect of application methods and various surface sealing techniques or soil treatments on emission reduction from soil fumigation. Telone (1,3-dichloropropene or 1,3-D) and chloropicrin (CP) were tested at the maximum rate used by growers in all field tests. Application methods included shank injection vs. subsurface drip as well as broadcast fumigation vs. target sub-area treatment. Surface sealing/treatments included water treatments (post-fumigation water seals and pre-fumigation irrigation), tarping with plastic films including standard high density polyethylene (HDPE) and low or virtually impermeable film (VIF), and surface soil amendment with organic matter or chemicals such as thiosulfate. Integrated results showed that emission reduction by HDPE tarp, post-fumigation water seals or pre-irrigation, and organic amendment can vary from zero to 50% due to variations in specific soil and environmental conditions as well as how the treatment was applied. These treatments sometimes compromise efficacy as well. Thiosulfate treatment in surface soil following fumigation reduced emissions significantly; but resulted in some undesirable byproducts. The VIF tarp consistently showed the most promise in reducing emissions (>90% emission reduction) while improving efficacy, but it is also the most costly. Uncertainties on the use of VIF tarp remain because they are susceptible to damage during field installation. Commercial low permeable films that maintain integrity from field installation is a viable option for crops with very high potential profit margins. Feasible techniques for lower profit margin commodities should consider the practicality for the production system, effectiveness on emission reduction, potential impact on pest control, and affordability.

## Contents

Acknowledgements.....	iii
Abstract .....	iv
Figures .....	viii
Tables .....	xi
Abbreviations.....	xii
1.0 Introduction .....	1
1.1 Status of Soil Fumigant Use in California.....	1
1.2 Fumigant Characteristics.....	3
1.3 Methods to Reduce Fumigant Emissions.....	6
1.4 Objectives.....	11
2.0 Materials and Methods.....	11
2.1 Soils and Chemicals.....	12
2.2 Fumigant Analysis in the Laboratory.....	15
2.3 Soil Column Experiment 1.....	17
2.4 Soil Column Experiment 2.....	20
2.5 Soil Column Experiment 3.....	21
2.6 Field Trial 1 (Year 2005).....	23
2.6.1 Fumigation and Treatment.....	23
2.6.2 Field Sampling.....	25
2.7 Field Trial 2 (Year 2006) .....	27
2.7.1 Fumigation and Treatment.....	28
2.7.2 Field Sampling.....	30
2.8 Field Trial 3 (Year 2007) .....	31
2.8.1 Fumigation and Treatment.....	31
2.8.2 Field Sampling.....	33
2.9 Statistical analysis .....	34
3.0 Results and Discussions.....	35
3.1 Soil Column Experiment 1.....	35
3.1.1 Emission Flux.....	35

3.1.2	Cumulative Emission Loss.....	36
3.1.3	1,3-D Concentrations in Soil-Gas Phase.....	38
3.1.4	Residual and the Fate of 1,3-Dichloropropene.....	39
3.1.5	Conclusion.....	41
3.2	Soil Column Experiment 2.....	42
3.2.1	Soil Water Content .....	42
3.2.2	Emission Flux.....	42
3.2.3	Cumulative Emission Loss.....	46
3.2.4	1,3-D in Soil-Gas Phase and Soil Residual 1,3-D.....	46
3.2.5	Fate of 1,3-D.....	49
3.2.6	Conclusion.....	49
3.3	Soil Column Experiment 3.....	50
3.3.1	Emission Flux.....	50
3.3.2	Cumulative Emission Loss.....	51
3.3.3	Fumigants in Soil-Gas Phase.....	53
3.3.4	Residual Fumigants in Soil and the Fate of Fumigants.....	56
3.3.5	Conclusion.....	56
3.4	Field Trial 1 (Year 2005) .....	60
3.4.1	Emission Flux.....	60
3.4.2	Cumulative Emission Loss.....	62
3.4.3	Fumigants in Soil-Gas Phase.....	64
3.4.4	Residual Fumigant in Soil.....	67
3.4.5	Soil Water Content, Temperature, and Nematode Response .....	68
3.4.6	Conclusion .....	71
3.5	Field Trial 2 (Year 2006) .....	72
3.5.1	Emission Flux.....	72
3.5.2	Cumulative Emission Loss.....	76
3.5.3	Fumigant in Soil-Gas Phase.....	79
3.5.4	Residual Fumigant.....	79
3.5.5	Soil Water Content.....	81
3.5.6	Conclusion.....	83

3.6	Field Trial 3 (Year 2007)	83
3.6.1	Emission Flux	83
3.6.2	Cumulative Emission Loss	85
3.6.3	Fumigant in Soil-Gas Phase	90
3.6.4	Soil Residual Fumigant	92
3.6.5	Soil Moisture and Temperature	92
3.6.6	Conclusion	95
4.0	Summary	96
5.0	References	102

## Figures

Figure 1-1. Chemical structure of soil fumigants .....	4
Figure 1-2. The fate of soil fumigants .....	6
Figure 2-1. Soil water content at the end of the soil column experiment 3.....	22
Figure 3-1. Emission rate of <i>cis</i> -1,3-dichloropropene in soil column studies- (A) water seal and manure treatments; (B) ammonium thiosulfate treatments in soil column experiment 1.....	37
Figure 3-2. Cumulative emissions of <i>cis</i> -1,3-dichloropropene from soil column treatments over two weeks in soil column experiment 1.....	38
Figure 3-3. Concentration of <i>cis</i> -1,3-dichloropropene (1,3-D) in the soil-gas phase from soil column treatments in soil column experiment 1.....	40
Figure 3-4. Distribution of soil water content (% v/v) with depth in soil column experiment 2: A) Loamy sand, B) Sandy loam, C) Loam.....	44
Figure 3-5. Comparison of 1,3-dichloropropene (1,3-D) emissions from different soil surface treatments: A) Loamy sand, B) Sandy loam, C) Loam in soil column experiment 2.....	45
Figure 3-6. Distribution of 1,3-dichloropropene (1,3-D) in soil-gas phase under different surface treatments in soil column experiment 2. LS = Loamy Sand, SL = Sandy Loam, L = Loam .....	48
Figure 3-7. Effect of soil water content on emission flux of <i>cis</i> - and <i>trans</i> -1,3-dichloropropene (1,3-D), and chloropicrin (CP) in soil column experiment 3.....	52
Figure 3-8. Cumulative emissions of <i>cis</i> - and <i>trans</i> -1,3-dichloropropene (1,3-D), and chloropicrin (CP) affected by soil water content (soil column experiment 3) .....	54
Figure 3-9. Distribution of <i>cis</i> -1,3-dichloropropene (1,3-D) in soil-gas phase at different water treatments (soil column experiment 3).....	55



Figure 3-10. Average residual <i>cis</i> -and <i>trans</i> -1,3-dichloropropene (1,3-D), and chloropicrin (CP) concentration in soil columns under different soil water contents (soil column experiment 3).....	58
Figure 3-11. Effects of application methods and surface seal treatments on emission flux of (a) 1,3-dichloropropene (1,3-D) and (b) chloropicrin (CP) from Telone C35 (shank-injection) and InLine (drip-irrigation) applications in 2005 field trial.....	61
Figure 3-12. Cumulative emission of (a) 1,3-dichloropropene (1,3-D) and (b) chloropicrin (CP) from surface seal treatments in 2005 field trial.....	63
Figure 3-13. Distribution of 1,3-dichloropropene (1,3-D) in the soil-gas phase after fumigation under various surface treatments in 2005 field trial.....	66
Figure 3-14. Residual fumigants (a) 1,3-dichloropropene (1,3-D) and (b) chloropicrin (CP) extracted from soil samples collected 14 d after fumigation in 2005 field trial.....	67
Figure 3-15. Soil water content measured two weeks after fumigation under various surface treatments in 2005 field trial.....	69
Figure 3-16. One-day soil temperature measurements at a 10 cm depth during the fumigant emission monitoring period in 2005 field trial.....	70
Figure 3-17. Effects of surface seal and soil treatments on emission flux of 1,3-dichloropropene (1,3-D) and chloropicrin (CP) from shank-injection of Telone C35 in 2006 field trial.....	75
Figure 3-18. One-day soil temperature measurements at 10 cm soil depth during fumigant emission monitoring period in 2006 field trial.....	76
Figure 3-19. Cumulative emission losses of 1,3-dichloropropene (1,3-D) and chloropicrin (CP) from surface seal and soil treatments in 2006 field trial.....	77
Figure 3-20. 1,3-dichloropropene (1,3-D) distribution in the soil-gas phase under various surface treatments at location <i>a</i> - adjacent to fumigant injection	

lines (top six graphs), and location <i>b</i> - between injection lines (bottom six graphs) under various surface treatments in 2006 field trial.....	80
Figure 3-21. Residual 1,3-dichloropropene (1,3-D) and chloropicrin (CP) extracted from soil samples 14 days after fumigation in 2006 field trial.....	81
Figure 3-22. Soil water content measured the day before fumigation and 4 and 14 days after fumigation under various surface treatments in 2006 field trial.....	82
Figure 3-23. Effects of manure and water applications on emission flux of (a) 1,3-dichloropropene (1,3-D) and (b) chloropicrin (CP) in 2007 field trial.....	84
Figure 3-24. Cumulative emission loss of (a) 1,3-dichloropropene (1,3-D) and (b) chloropicrin (CP) from manure amendment and water application treatments in 2007 field trial.....	87
Figure 3-25. 1,3-dichloropropene (1,3-D) concentration in the soil-gas phase at location <i>a</i> (adjacent to fumigant injection line; graphs on the left side) and at location <i>b</i> (between fumigant injection lines; graphs on the right side) in 2007 field trial.....	91
Figure 3-26. Residual 1,3-dichloropropene (1,3-D) and chloropicrin (CP) extracted from soil samples 10 days after fumigant injection in 2007 field trial.....	93
Figure 3-27. Soil water content measured at the end of 2007 field trial .....	93
Figure 3-28. Soil temperature measured at a 10 cm depth on October 5, 2007 during the field trial in 2007.....	94

## Tables

Table 1-1. Physicochemical properties of soil fumigants.....	5
Table 2-1. Summary of laboratory soil column experiments and treatments on fumigant emission reductions.....	13
Table 2-2. Summary of field trials and surface treatments on emission reductions from soil fumigation.....	14
Table 2-3. Selected properties of soils used in this project.....	15
Table 2-4. Fumigation and surface treatments for emission study in 2005 field trial.....	24
Table 3-1. Fate of 1,3-dichloropropene in soil column experiment 1.....	41
Table 3-2. Fate of 1,3-dichloropropene in soil column experiment 2.....	47
Table 3-3. Effect of soil water content on the fate of <i>cis</i> - and <i>trans</i> -1, 3-dichloropropene (1,3-D) and chloropicrin (CP) in soil column experiment 3.....	59
Table 3-4. Peak flux and total emission loss of 1,3-dichloropropene (1,3-D) and chloropicrin (CP) measured over 2 weeks after fumigation in the 2005 field trial.....	68
Table 3-5. Total emission loss of 1,3-dichloropropene (1,3-D) and chloropicrin (CP) measured over 2 weeks after fumigation in the 2006 field trial.....	78
Table 3-6. Emission peak and cumulative emission loss of 1,3-dichloropropene (1,3-D) and chloropicrin (CP) monitored over 10 days following fumigation in the 2007 field trial.....	88

## Abbreviations

1,3-D	1,3-dichloropropene or Telone
ATS or KTS	ammonium or potassium thiosulfate
CP	chloropicrin
FC	field capacity
GC	gas chromatography
HDPE	high density polyethylene
MeBr	methyl bromide
PE	polyethylene
SOM	soil organic matter
VIF	virtually impermeable film
XAD tubes	ORBO 613, XAD 4 80/40mg (Supelco, Bellefonte, PA)
μECD	micro electron capture detector

## **1.0 INTRODUCTION**

### **1.1 Status of Soil Fumigant Use in California**

Pre-plant soil fumigation with methyl bromide (MeBr) has been an important management practice to control a variety of soil-borne pests including nematodes, diseases, and weeds in many agricultural systems. Many important commodities in California have relied on soil fumigation for decades. These crops include high-value cash crops such as annual fruits/vegetables (e.g., strawberry, carrots), ornamentals and perennial trees (stone fruit/nut) and grapevine including nursery and orchard re-planting. In California, open-field tree and grapevine nurseries must meet the requirements of the California Department of Food and Agriculture (CDFA) Nursery Nematode Control Program to produce parasitic nematode-free crops (CDFA, 2008). Soil fumigation is a critical tool for meeting the certification. Without fumigants, productivity of these cropping systems would suffer from significant yield losses due to diseases or replant disorders or lack of phytosanitary certification.

Methyl bromide was used as a broad-spectrum soil fumigant for decades. Due to its contribution to the depletion of stratospheric ozone (the good ozone protecting life and materials on the earth), MeBr was phased-out in the US and other developed countries as of January 2005 under the provisions of the Montreal Protocol (an international agreement) and the U.S. Clean Air Act in the USA (USEPA, 1994; 2009). Some limited uses of MeBr are permitted for crops that satisfy Critical Use Exemptions (CUEs) and Quarantine/Preshipment (QPS) criteria. The amounts of MeBr allowed for different commodity use, however, are subject to annual application and approval and have been decreasing each year (the information on yearly nomination and approval can be found at USEPA website: <http://www.epa.gov/ozone/mbr/>). The price of MeBr has been increasing steadily as the amount of CUE allowance decreases (Noling and Botts, 2009). Subsequently, alternatives have been increasingly used (CDPR, 2006; Trout, 2006). Challenges in transition from MeBr to alternatives continue as none of the alternatives are as effective as MeBr in pest control and these alternatives are heavily regulated because of exposure risks and contribution to air quality degradation through emissions of volatile organic compounds (VOCs), which can

react with nitrogen oxides under the sunlight to form harmful ground level ozone (CDPR, 2009; USEPA, 2009). Five ozone non-attainment areas were identified in California with the most restrictive in Ventura County and the San Joaquin Valley. Stringent environmental regulations continue to be developed or implemented in these areas in the effort of reducing emissions from soil fumigation (CDPR, 2006).

Soil fumigants in California must be registered through the California Department of Pesticide Regulation (CDPR). Only a few alternative fumigants to MeBr are currently registered including 1,3-dichloropropene (Telone® or 1,3-D), chloropicrin (CP), and methyl isothiocyanate (MITC) generators (e.g., metam sodium or dazomet) (Trout, 2006; CDPR, 2007). Methyl iodide (iodomethane) is not currently registered in California except under Research Authorization. 1,3-D is a good nematocide; CP is a good fungicide and nematocide; and MITC serves as a good fungicide and herbicide with some capabilities as a nematocide (Ajwa et al., 2003). Use of these alternatives has been increasing dramatically in various commodities (Trout, 2006). MITC generators are mostly used on annual fruit/vegetable crops such as tomato, carrots, potato, leaf vegetables, pepper and melons etc. 1,3-D and CP, mostly in a combination, have been increasingly used on strawberry crops and perennial trees (including nurseries and orchard replant). In addition to their toxic properties, most of these alternative fumigants and some inert formulation ingredients are volatile organic compounds (VOCs), important air pollutants that can react with nitrogen oxides under sunlight to form harmful ground level ozone (the bad ozone). Ground-level ozone is the primary constituent of smog. Regulations have been used to protect public and environmental health by controlling the use amount, buffer zone and emission loss. Regulations currently in place include Township Caps (Telone), buffer zones and restricted application techniques, timing, and rates designed to reduce emissions. Township Caps limit Telone usage to 90,250 lbs per township (23,040 ac) (Trout, 2003). Recently, California has further implemented mitigation measures to reduce total VOC emissions that are required in ozone non-attainment areas targeting low emissions from May through October (CDPR, 2007a,b; 2009; Segawa, 2008). To some extent, minimizing fumigant emissions will allow continued availability of fumigants to growers by meeting environmental safety standards.

## 1.2 Fumigant Characteristics

Soil fumigants are volatile chemical compounds, i.e., they are capable of transforming and producing volatile ingredients. These compounds become gases at relatively low temperatures after application to soils. They generally have low boiling points, high vapor pressure, and low solubility. Their high volatility and potential to partition into the gas phase are advantages that allow their dispersal throughout the soil profile to control soil-borne pests. However, these same benefits also create problems as the compounds quickly volatilize and may be lost through emissions if they are not properly contained. Properties and chemical structures of typically used soil fumigants are provided in Table 1-1 and Figure 1-1, respectively.

The more volatile a compound is, the easier it is to disperse in soil and the higher tendency towards volatilization loss. Alternatives 1,3-D and CP have lower vapor pressures than MeBr; thus effective dispersion of the chemicals in soil is critical to pest control. Soil-fumigation is aimed at maximum control of soil-borne pests, which requires an effective concentration or exposure duration and a uniform distribution of fumigants throughout the soil. To achieve maximum efficacy and minimum emission loss, it is essential to understand the number of processes affecting the fate of fumigants after application to soil (Figure 1-2).

Fumigants are subject to partitioning into soil, air, water and solid phases (most importantly organic matter), degradation (chemical and microbial), volatilization, and potential leaching. Henry's law constant ( $K_H$ ) is a measure of fumigant concentration ratio in gas-phase over its concentration in liquid-phase at equilibrium and can be used to evaluate the volatility of a chemical. The higher the  $K_H$ , the higher the tendency for the fumigants to transfer from liquid phase to gas phase and be more easily distributed over a large area. Considering the large air volume in the atmosphere to the soil, fumigant loss to the air can be high in open systems. On the other hand, the  $K_H$  values for all fumigants are less than one indicating that fumigants would partition more into aqueous phase than in the air in terms of concentration if surface sealing or a barrier is applied to create a closed system. Volatilization and leaching processes result in undesirable consequences for potential air and water contamination with the former

as one of the major air quality concerns for fumigant pesticides. Thus, containment of fumigants in the rhizosphere is essential for minimizing emissions as well as ensuring good efficacy. Without proper containment, more than half of fumigants applied can be easily lost through emissions (e.g., Yates et al., 2003; Gao and Trout, 2007). The fumigant lost to atmospheric emissions not only contributes to air pollution, but also translates into wasted resources intended for soil pest control.

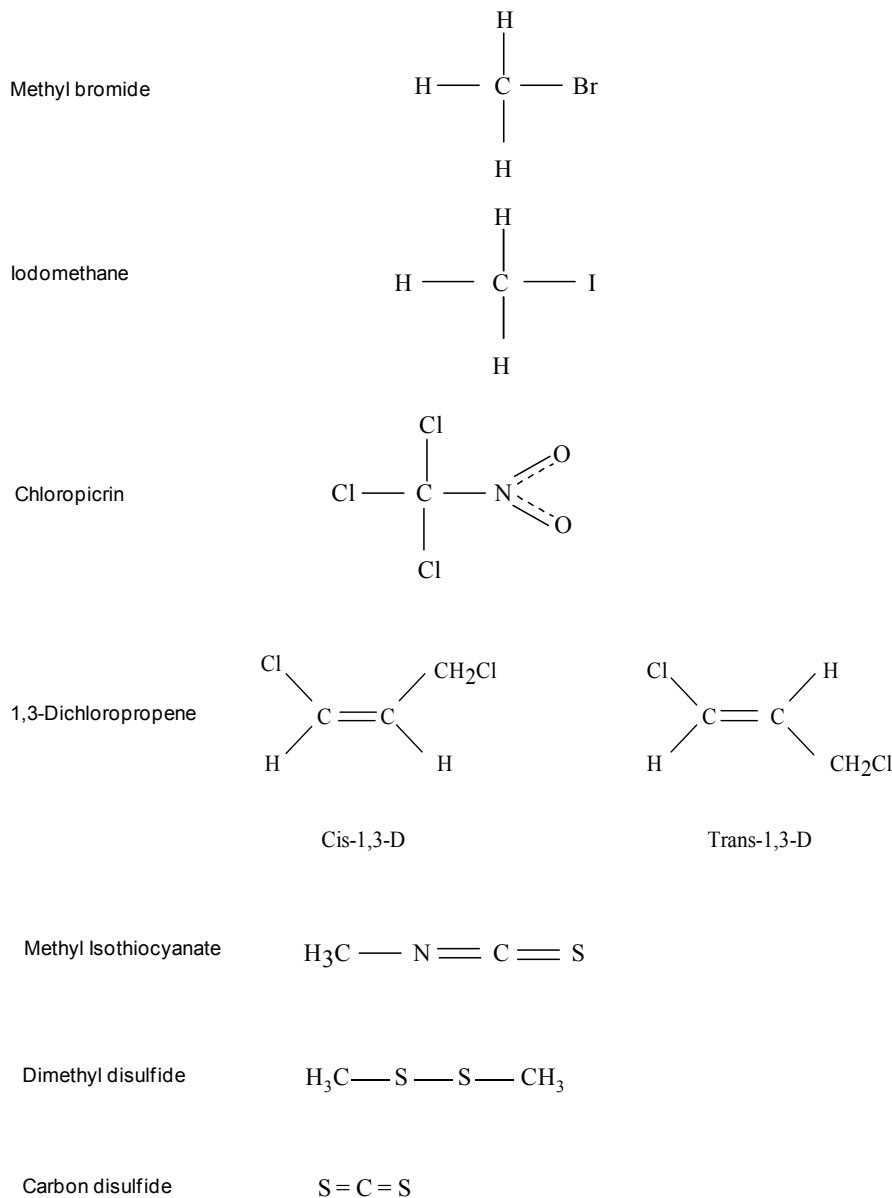


Figure 1-1. Chemical structure of soil fumigants (source: Ajwa et al., 2003)



Table 1-1. Physicochemical properties of soil fumigants

Fumigant	Molecular formula	Molecular weight (g mol <sup>-1</sup> )	Boiling Point (°C)	Density (g ml <sup>-1</sup> )	Water solubility (g l <sup>-1</sup> )	Vapor pressure (kPa)	$K_H$	Kd or Kf (ml g <sup>-1</sup> )	$t_{1/2}$ (d)	Rf	Af l=25 cm
Methyl bromide	CH <sub>3</sub> Br	94.9	3.6	1.73 (0 °C)	13.4 (25 °C)	227 (25°C)	0.24 (20 °C)	0.04-0.10	4-52	2.37	0.59
Methyl iodide	CH <sub>3</sub> I	141.9	42.4	2.28 (20 °C)	14.0 (25 °C)	53 (25 °C)	0.21 (25 °C)	n.a.	11-43	n.a.	
<i>cis</i> -1.3-D	C <sub>3</sub> H <sub>4</sub> Cl <sub>2</sub>	111.0	104.3	1.22 (20 °C)	2.32 (25 °C)	4.5 (25°C)	0.074 (25 °C)	0.5-1.5	3-17	2.81	0.04
<i>trans</i> -1.3-D	C <sub>3</sub> H <sub>4</sub> Cl <sub>2</sub>	111.0	112	1.22 (20 °C)	2.18 (25 °C)	3.1 (25 °C)	0.043 (25 °C)	0.4-0.70	3-17	2.79	0.02
Chloropicrin	Cl <sub>3</sub> CNO <sub>2</sub>	164.4	112	1.66 (20 °C)	1.62 (25°C)	3.2 (25 °C)	0.10 (20 °C)	0.14-0.03	0.2-4	n.a.	
MITC	CH <sub>3</sub> NCS	73.1	118-119	1.05 (24 °C)	8.2 (25 °C)	2.5 (20 °C)	0.01 (20 °C)	0.012-0.57	1-13	1.34	0.37
Dimethyl disulfide	C <sub>2</sub> H <sub>6</sub> S <sub>2</sub> CS <sub>2</sub>	94.2 76.1	110 45.5	1.06 (16 °C) 1.26 (20 °C)	4.2 2.94	2.9 (20 °C) 47 (25 °C)	0.05 (20 °C) 0.078 (10 °C)	(k <sub>s/w</sub> ) n.a.		1.53 0.90	
Carbon disulfide											

$K_H$ , Henry's Law constant (dimensionless); Kd or Kf, linearized adsorption or Freundlich coefficient;  $t_{1/2}$ , half-life; Rf, retention factor; and Af, attenuation factor; n.a., data not available. (Source: Ajwa et al., 2010).

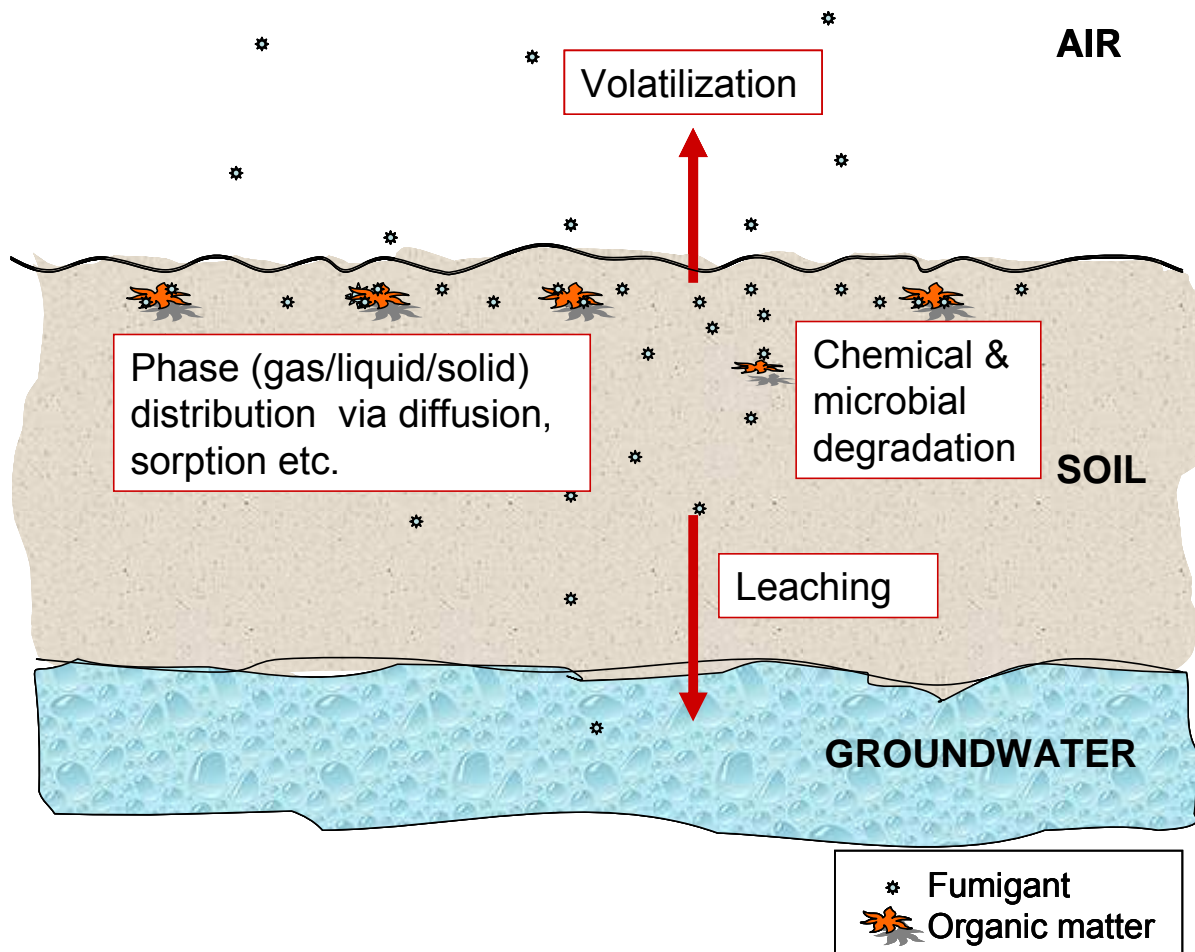


Figure 1-2. The fate of soil fumigants (Source Gao et al., in press)

### 1.3 Methods to Reduce Fumigant Emissions

Emissions from soil fumigation are affected by soil conditions (texture, moisture, temperature, and organic matter content), weather, and surface barriers or treatments as well as the chemical properties of the fumigant. Generally, lower emissions are expected from soils with fine texture, high water content, high soil organic matter (SOM) content, and low temperature as compared to soils that have a coarse texture, are dry, have a low SOM content

and are under high temperature conditions. Approaches to reduce fumigant emissions include management of application methods such as equipment design/injection depth, physical barriers, irrigation, soil amendment with chemicals or organic materials to react with fumigants, and targeted reduced area treatments. The following briefly reviews the knowledge on these emission reduction methods prior to the project.

**Plastic tarp.** The most commonly adopted practice is to place standard polyethylene (PE) film, either high density (HDPE) or low density (LDPE) tarp, over the soil after fumigation. This technology was developed primarily for MeBr but was found not to be effective in controlling emissions of some alternatives - especially 1,3-D (Wang et al., 1999; Papiernik and Yates, 2002). Low-permeable films, such as the virtually impermeable film (VIF), have shown effectiveness on emission reduction. The VIF is typically a multilayer film that contain high barrier polymers such as ethylene vinyl alcohol or polyamide (nylon) sandwiched between other polymer layers (typically low-density polyethylene) (Noling, 2002). The VIF is generally much less permeable to fumigants than PE films.

**Irrigation or water treatments** can drastically alter soil moisture conditions that affect fumigation emissions. Water seals (applying water with sprinklers to the soil surface) can effectively prevent rapid fumigant emissions by forming a temporarily saturated or high water content layer at the soil surface and reducing secondary (macro) porosity. Increasing soil water content also reduces fumigant diffusion in soil because fumigant diffusion is much slower in the liquid phase than in the gas phase. Water seals were found to be effective in reducing emissions of MeBr (Jin and Jury, 1995; Wang et al., 1997), MITC (Sullivan et al., 2004), 1,3-D and CP (Thomas et al., 2003; Gao and Trout, 2006). The proper timing of water applications as well as the use of intermittent water applications were important factors for maximizing emission reduction (Gao and Trout, 2006; Sullivan et al., 2004). There were not enough field data to quantify the potential of water treatments to reduce Telone fumigant emissions under practical field operation conditions. The amount of water retained by a soil is affected by soil texture and bulk density which can vary throughout a field as well as throughout the soil profile. Finer- textured soils generally hold water longer than coarser-textured soils.

High soil water content was found to decrease the peak flux and reduce cumulative emission losses of 1,3-D (Thomas et al., 2003). Thomas et al. (2004) in another field test also found that soil water content near FC decreased the emissions of 1,3-D and CP as compared to the air-dry soil. In a column study, Gan et al. (1996) found that high soil water content decreased the peak flux of MeBr and also delayed the occurrence of the peak. Lower MeBr emission from wet soils was also reported by Shinde et al. (2000). However, excessive soil moisture can reduce fumigant distribution throughout the soil profile and is undesirable because of its potential to reduce pest control (McKenry and Thomason, 1974; Thomas et al., 2003). For fine-textured soils, the effect of soil water content on fumigant diffusion was most striking when soils had soil water tension less than 50 kPa at 30 cm depth (McKenry and Thomason, 1974). Generally speaking, the proper amount of water applied and the timing of water application are not well understood in terms of achieving emission reduction while ensuring good efficacy as they can vary for different fumigation rates and varying soil/weather conditions.

**Soil amendment with chemicals** (e.g., ammonium thiosulfate, thiourea, or polysulfides) had been shown to degrade fumigants effectively in soils (Wang et al., 2000; Zheng et al., 2003) and soil columns (Qin et al., 2007) and to reduce emissions from soil columns and small plot tests (Gan et al., 1998a; Zheng et al., 2006). Thiosulfate was suggested as a reactive surface barrier to reduce fumigant emissions, because they can react with halogenated fumigants rapidly to form a dehalogenated product and a halide ion ( $\text{Cl}^-$ ) (Yates et al., 2002; Zheng et al., 2006; Gan et al., 2000; Gan et al., 1998a). Generally, a greater ATS:fumigant ratio applied to the soil surface results in faster transformation and effective emission reduction (Wang et al., 2000).

**Amendment of soils with organic materials** such as composted manure can increase fumigant adsorption and enhance degradation of fumigants in soils to reduce emissions (e.g., Gan et al., 1998b; Kim et al., 2003; Dungan et al., 2001; Dungan et al., 2005; and Ashworth and Yates, 2007). Dungan et al. (2005) evaluated composted steer manure and composted chicken manure that were incorporated into the surface 5 cm of soil at 3.3 and 6.5 kg m<sup>-2</sup> (or

33 and 65 Mg ha<sup>-1</sup>, respectively) to reduce emissions from a drip-applied emulsified formulation of 1,3-D in raised beds. Their results showed that cumulative emission loss of 1,3-D over 170 h were 48% and 28% lower from the steer manure and chicken manure amended beds, respectively, than from the unamended beds. However, all the studies that indicated the effectiveness of OM amendment in reducing emissions were tested at a much lower fumigant application rate, about one third of the maximum Telone application rate in California (e.g., Dungan et al., 2005; Ashworth and Yates, 2007). There had been no testing done at the maximum Telone application rate allowed in CA for effective pest control (e.g., perennial nurseries and orchards).

**Application methods** can drastically affect fumigant emissions. Various fumigant application techniques are being used depending on the cropping system, formulation type, pests to be controlled, and timing of the application. Liquid fumigants are applied from pressurized cylinders by directly injecting them into the soil via tractor-driven shanks or chisels (shank injection). Deeper injection depths allow further movement of fumigants through soil pores. CDPR considers the 18" depth a deep injection for broadcast shank application as a low emission application method. Fumigants can also be applied to soil via irrigation systems such as sprinklers or drip tapes (drip application), which is referred to as chemigation. The irrigation water acts as a vehicle to distribute and deliver the fumigant to deeper depths (Ajwa and Trout, 2004). Although most fumigants have low solubility in water, they can achieve sufficient concentrations for good pest control; some such as 1,3-D and CP have sufficient solubility and can be applied with irrigation water. Emulsified formulations (e.g., InLine containing 61% 1,3-D, 33% CP and 6% inert ingredient) are popularly used for drip-application.

Drip application of fumigants has been shown to be an effective fumigation practice for raised strawberry beds (Ajwa and Trout, 2004). By 2009, about 50% of strawberry fields in the coastal areas were fumigated with drip-application. Trout et al. (2003) found that subsurface drip application of fumigants before orchard replant provided good efficacy. Many orchards are irrigated with micro-irrigation systems, so drip application of fumigants may also be a viable option. Subsurface drip irrigation with fumigants was shown to give

lower emissions than shank injections from soil columns and small plot tests (Gan et al., 1998c; Wang et al., 2001). Emission assessments from subsurface drip applications were limited under field operation conditions.

For stone fruits/grapevine orchard replanting or any other commodities with low-profit margins, fumigation methods must be cost-effective to be feasible. Browne et al. (2003) proposed reducing fumigation areas to tree rows or tree sites for controlling replant diseases/disorders. Because trees are planted in widely spaced rows, strip application of fumigants is an option to effectively treat target areas. Reducing fumigation areas may offer low and effective use of fumigants. Low chemical input automatically reduces emissions. The target area treatment, however, is not recommended for pest-infected fields, which require broadcast fumigation. Overall, no adequate assessment had been given regarding the benefits of target-area fumigation on reducing emissions.

Generally speaking, prior to the project, a fair amount of knowledge and research were available especially on MeBr and some alternatives that were mostly conducted on a laboratory scale or in limited field operations. Field data for feasible and effective emission reduction methods especially representing field operation conditions are needed to help address the environmental issues by minimizing emissions. There was also a significant lack of research on what field management practices can be taken to minimize emissions while ensuring satisfactory pest control with alternative fumigants to MeBr. Numerous studies have shown that satisfactory pest control for deep-rooted perennial fields require relatively high rates of Telone products compared to rates used for annual vegetable crops. Do emission reduction methods offer the same effectiveness for both low and high fumigation rates? With the increasing awareness and environmental regulations on soil fumigant use, addressing these issues would help maintain the availability of fumigants to growers especially in California where many high value crops rely on pre-plant fumigation for sustaining agricultural productivity. This project was designed to collect data to evaluate a number of field management options to control emissions.

## 1.4 Objectives

The goal of this project was to develop field management practices that reduce emissions from soil fumigation while maintaining good soil pest control. This project focused on alternatives 1,3-D and CP at relatively high application rates for perennials. The maximum rate of 1,3-D for broadcast application in CA is 332 lbs per acre (or 372 kg ha<sup>-1</sup>). This rate (1,3-D alone or 1,3-D plus additional CP) is used for certified nursery stock production with standard HDPE tarp (CDFA, 2008). The maximum rate of 1,3-D translates to 33.7 gallons per acre (or 341 lbs ac<sup>-1</sup> = 380 kg ha<sup>-1</sup>) of Telone II (97.5% 1,3-D and 2.5% inert ingredient) or 48.6 gallons per acre (or 544 lbs ac<sup>-1</sup> = 610 kg ha<sup>-1</sup>) of Telone<sup>®</sup> C35 (61.1% 1,3-D, 34.7% CP and 4.2% inert ingredient). Orchard replanting may use lower rates than the nurseries, but much higher rates than vegetable and field crops to ensure satisfactory soil pest control according to their labels. We believe that effective emission reduction methods for high application rates will apply to situations with low fumigation rates. Specific objectives were chosen for each experiment or field trial (Tables 2-1 and 2-2) to evaluate various surface sealing or soil treatments on fumigant emissions and fumigant distribution in soil. Although the agronomic systems were targeted in the San Joaquin Valley, the results should apply to other agronomic systems or in other geographical areas.

## 2.0 MATERIALS AND METHODS

A comprehensive approach was used in this project for collecting data and information needed to conclude the effectiveness of various field methods to control fumigant emissions. Three lab experiments and three field trials were conducted from October 2005 through July 2008. A summary of the three laboratory experiments and three field trials are given in Tables 2-1 and 2-2, respectively. Each experiment or trial targeted specific questions with specific objectives. Conducting field trials is often labor-intensive and costly in addition to the involvement of more variables that sometimes result in difficulties in interpreting data. Laboratory experiments can be conducted within a relatively short period of time at low costs and also allow better control of the study conditions for testing single or multiple variables at

one time. Laboratory studies, however, may not be directly used to represent what actually would occur under field conditions. Caution should be taken when extrapolating laboratory data to the field environment.

## 2.1 Soils, Chemicals and Plastics

Three different soils were used in this research: 1) Atwater loamy sand (coarse-loamy, mixed, active, thermic Typic Haploxeralfs); 2) Hanford sandy loam (coarse-loamy, mixed, superactive, nonacid, thermic Typic Xerorthents); and 3) Madera loam (fine, smectite, thermic Abruptic Durixeralfs). Properties of these three soils are given in Table 2-3. The Hanford sandy loam was tested the most among the experiments and was the major soil type in all field trials. For laboratory studies, soil samples were collected from field surface (~0–30 cm), air-dried, sieved through a 4-mm sieve, and mixed thoroughly before being used. The Atwater loamy sand was obtained from a cultivated field in Atwater, Merced County, CA. The Atwater series soils are distributed along the east side of the San Joaquin Valley, comprising 36,000 ha in Fresno, Merced and Madera Counties, and mainly used for production of truck crops, tree fruits, nuts, grain and alfalfa (NRCS, 2004). The Hanford sandy loam was collected from the USDA-ARS San Joaquin Valley Agricultural Sciences Center, Parlier, Fresno County, CA. Hanford series soils are widely distributed in the San Joaquin Valley and in the valleys of central and southern California and typically are used for growing a wide range of fruits, vegetables and general farm crops (NRCS, 2004). The Madera loam was obtained from Bright's Nursery in Le Grand, Merced County, CA. The Madera soil series is used mainly for irrigated cropland and is distributed in the eastern side of the Sacramento and the San Joaquin Valley (NRCS, 2004).

1,3-dichloropropene either in mixture of isomers or pure *cis*- or *trans*-1,3-D (purity of 98.9% and 99%, respectively) was provided by Dow AgroScience (Indianapolis, IN). Chloropicrin (purity of 99.9%) was provided by Niklor Chemical Co., Inc. (Mojave, CA). Ethyl acetate (pesticide grade), hexane (pesticide grade), and sodium sulfate anhydrous 10-60 mesh (ACS grade) were obtained from Fisher Scientific (Tustin, CA). All laboratory work with



Table 2-1. Summary of laboratory soil column experiments and surface treatments on fumigant emission reductions

Exp #	Specific Objectives	Soils/Fumigants	Surface treatments	Others
1	To determine the effectiveness of surface amendments with ammonium thiosulfate (ATS) and composted manure and in combination with water application or standard (HDPE) tarp on emission reduction of 1,3-D from soil columns compared to a water seal	Hanford sandy loam; <i>cis</i> -1,3-D (122 mg per column, equivalent to application rate of 65 kg ha <sup>-1</sup> )	<ol style="list-style-type: none"> <li>1. Control</li> <li>2. Water seal (9 mm of water)</li> <li>3. Chemical seal 1 (<i>ATS 1:1</i>)</li> <li>4. Chemical seal 1 (<i>ATS 1:1+HDPE</i>)</li> <li>5. Chemical seal 2 (<i>ATS 2:1</i>)</li> <li>6. Manure (5%, w/w top 5 cm soil) plus water seal (<i>Manure</i>)</li> <li>7. Manure amendment plus water seal and tarping (<i>Manure+ HDPE</i>)</li> </ol>	Lab room temperature: 22±3 °C
2	To determine the effectiveness of water seals on reducing 1,3-D emissions from different textured soils (loamy sand, sandy loam, and loam) in soil column tests	Atwater loamy sand, Hanford sandy loam, and Madera loam; <i>cis</i> -1,3-D (122 mg per column, equivalent to application rate of 65 kg ha <sup>-1</sup> )	<ol style="list-style-type: none"> <li>1. Control</li> <li>2. Initial water seal - sprayed 9 mm of tap water onto soil surface just before fumigant injection</li> <li>3. Intermittent water seals - initial water seal with 9 mm water followed by two sprayed water applications of 3 mm at 12 h and 24 h after 1,3-D application</li> </ol> <p>Treatment 2 was not tested in the loamy sand soil and instead, a reduced-amount intermittent water seal treatment (i.e., initial water 3 mm + 1 mm at 12 and 24 h) was tested.</p>	Lab room temperature: 22±3 °C
3	To determine the effects of soil water content on emission and distribution of 1,3-D and CP in soil columns	Hanford Sandy loam; 1,3-D (mixture of <i>cis</i> - and <i>trans</i> -1,3-D isomers) and CP (111 mg each of compound per column, equivalent to application rate of 37 kg ha <sup>-1</sup> )	<p>Soil water content:</p> <ol style="list-style-type: none"> <li>1. 30% of field capacity (FC) (<i>W30</i>)</li> <li>2. 45% of FC (<i>W45</i>)</li> <li>3. 60% of FC (<i>W60</i>)</li> <li>4. 75% of FC (<i>W75</i>)</li> <li>5. 90% of FC (<i>W90</i>)</li> <li>6. 100% of FC (<i>W100</i>)</li> </ol>	Lab room temperature: 22±3 °C

Table 2-2. Summary of field trials and surface treatments on emission reduction from soil fumigation.

Field Trial/ duration	Objectives	Soils/ fumigants	Surface treatments (detailed information are given under each trial section)	Others
2005 (Oct. 26– Nov. 8, 2005)	To determine the effects of soil fumigation methods (shank-injection vs. subsurface drip-application) and surface treatments associated with water applications and plastic tarps on emissions of 1,3-D and CP	Hanford sandy loam; Telone C35 (745 kg ha <sup>-1</sup> ) and InLine (629 kg ha <sup>-1</sup> )	Surface treatment/application method: 1. Bare soil/shank (control) 2. HDPE/shank 3. VIF/shank 4. Pre-irrigation/shank 5. HDPE/drip 6. Water seals/drip (3" water, microspray before and after)/drip	Daily max. and min. air T ranged in 13–27°C and 3–12°C, respectively
2006 (Oct. 17–31, 2006)	To determine the effectiveness of surface seal (tarp or water) and soil treatments (irrigation and amendment with chemical and composted manure), as well as in combinations of methods, to reduce emissions of 1,3-D and CP from broadcast applications of Telone C35	Hanford sandy loam; Telone C35 (500 kg ha <sup>-1</sup> )	1. Control 2. Manure + HDPE (manure application rate: 12,4 Mg ha <sup>-1</sup> ). 3. KTS + HDPE (2:1 KTS/fumigant mass ratio or 1.4:1 molar ratio) 4. Pre-irrigation 5. Intermittent water seals (initial 13 mm water and 4 mm water applications at 12 h, 24 h, and 48 h). 6. Intermittent KTS applications (initial 2:1 KTS/fumigant ratio and 1:1 ratio at 12, 24, and 48 h, the same amount of water as treatment #5)	Daily max. and min. air T ranged in 20–30 and 2–9°C, respectively
2007 (Nov. 12– 22, 2007)	To determine the effect of soil amendment with composted manure with or without water applications on fumigant emission reduction and the potential impact on pest control	Hanford Sandy loam; Telone C35 (553 kg ha <sup>-1</sup> )	1. Control 2. Manure at 12.4 Mg ha <sup>-1</sup> 3. Manure at 24.7 Mg ha <sup>-1</sup> 4. Manure at 12.4 Mg ha <sup>-1</sup> + HDPE tarp 5. Water seals (initial 11 mm water sprinkler applied following fumigation and 4 mm water at 12, 24, and 48 h, respectively) 6. Combination of treatments 2 and 5 (Manure + water seals)	Daily max. and min. air T ranged in 17–24, 2–10°C, respectively

Table 2-3. Selected properties of soils used in this project

Soil properties	Atwater loamy sand	Hanford sandy loam	Madera loam
Bulk density, g cm <sup>-3</sup>	1.6	1.4	1.4
Sand, g kg <sup>-1</sup>	880	548	404
Silt, g kg <sup>-1</sup>	50	396	344
Clay, g kg <sup>-1</sup>	70	56	252
Water content at 33 kPa suction, g kg <sup>-1</sup>	54	170	230
Organic matter content, g kg <sup>-1</sup>	7.2	7.4	11.2
Cation exchange capacity, cmol <sub>c</sub> kg <sup>-1</sup>	3.3	6.8	20

fumigants and solvents was conducted under well-vented hoods. Only glassware and Teflon materials were used for all samples containing fumigants.

Fumigant products used in field fumigation included Telone II, Telone C35, and InLine (61% 1,3-D, 33% CP and 6% inert ingredient). The label information for these products can be found on the Dow AgroScience Inc. website

(<http://www.cdms.net/manuf/mprod.asp?mp=11&lc=0&ms=3691&manuf=11>). Plastic films tested in this project included standard (1 ml or 0.025 mm thickness) HDPE film (Tyco Plastics, Princeton, NJ) and Bromostop VIF (0.025 mm thickness, Bruno Rimini Corp, London, UK). The fumigant products and plastics as well as fumigation service for all field trials were provided by TriCal Inc. (Hollister, CA).

## 2.2 Fumigant Analysis in the Laboratory

Laboratory analysis for fumigants is mainly for 1,3-D and CP. 1,3-D is comprised of *cis*- and *trans*- isomers (Figure 1-1) that are quantified individually and simultaneously. Total 1,3-D, is reported as the sum of the two isomers unless otherwise specified. Air or soil-gas samples were collected in various experiments that were quantified either directly with gas chromatography (GC) equipped with a micro electron capture detector ( $\mu$ ECD) or trapped in resin sampling tubes for later extraction and quantification. ORBO 613, XAD 4 80/40mg

(Supelco, Bellefonte, PA) sampling tubes were used for trapping gas samples. The XAD resin traps both 1,3-D and CP efficiently at sampling flow rates below  $200 \text{ ml min}^{-1}$  (Gao et al., 2006). After collection, the XAD sampling tubes were stored under frozen conditions ( $-18$  to  $-80^{\circ}\text{C}$ ) until ready for extraction. The extraction included breaking the tubes and transferring all materials into 10 ml headspace glass vials. After 5 ml of hexane solvent was added, the vials were sealed immediately and then shaken for 1 h. After settling for a minimum of 2 h, a portion of the clear hexane extract was transferred to a 2 ml GC vial. The vials were stored in the  $-18^{\circ}\text{C}$  freezer until analysis. Based on analysis of 130 samples before and after storage of one month, relative standard deviations were 2.2 ( $\pm 4.6$ ), 1.8 ( $\pm 4.9$ ), and 1.5 ( $\pm 10.6$ ) for *cis* 1,3-D, *trans* 1,3-D, and CP, respectively.

Analysis of *cis*-1,3-D, *trans* 1,3-D and CP in hexane extracts was carried out using an Agilent Technology 6890N Network GC system  $\mu\text{ECD}$  (Agilent Technology, Palo Alto, CA). A DB-VRX capillary column (30 m length x 0.25 mm i.d. x 1.4- $\mu\text{m}$  film thickness, Agilent Technologies, Palo Alto, CA) was used for separation of fumigants. The GC carrier gas (He) flow rate, inlet temperature, and detector temperature were set at  $2.0 \text{ ml min}^{-1}$ ,  $140^{\circ}\text{C}$ , and  $300^{\circ}\text{C}$ , respectively. The oven temperature program began initially at  $65^{\circ}\text{C}$ , increasing by  $2.5^{\circ}\text{C min}^{-1}$  to  $85^{\circ}\text{C}$ . Using this method, retention time was 5.2, 5.9, and 6.6 min for *cis*-1,3-D, *trans*-1,3-D, and CP, respectively. Slight modifications of the program were used from time to time. The detection limit (three times the standard deviation of the background noise level) was 0.01, 0.01, and  $0.001 \text{ mg L}^{-1}$  for *cis*-1,3-D, *trans*-1,3-D and CP, respectively, when an injection volume of  $1 \mu\text{l}$  solution was used. Depending on the sample concentration range, a high standard range ( $1$  to  $100 \text{ mg L}^{-1}$ ) and a low range ( $0.1$  to  $10 \text{ mg L}^{-1}$ ) were used at various times. If the sample concentration was above  $100 \text{ mg L}^{-1}$ , sample dilution was made to below  $100 \text{ mg L}^{-1}$  and reanalyzed. Numerous duplicate analyses of samples were run that often resulted in standard deviation of less than 5%.

When fumigant in the soil-gas phase was sampled and analyzed directly with the GC such as in laboratory soil column experiments, the gas sample was injected into 20 ml clear headspace glass vials. To prevent moisture effects on fumigant stability, 0.2 g sodium sulfate was added to the vial before sample injections. The sample analysis was performed using a

GC- $\mu$ ECD and an automated headspace sampler (Agilent Technologies G1888 Network Headspace Sampler) system. A DB-VRX capillary column was used with the same dimensions as the fumigant analysis mentioned above. Conditions for the headspace autosampler were: equilibration temperature, 100°C; equilibration time, 2 min; and sample loop, 1 ml. The GC carrier gas (He) flow rate, inlet temperature, and detector temperature were set at 2.0 ml min<sup>-1</sup>, 150°C, and 300°C, respectively. The oven temperature program was the same as the liquid sample analysis with GC- $\mu$ ECD as described above.

For residual fumigant analysis, soil samples were collected at the end of experiments or field trials. Soil samples were stored under frozen conditions upon collection. The extraction of soil samples followed methods by Guo et al. (2003). While the vials were still frozen, an equivalent dry weight of 8 g of soil was weighed into a 20 ml clear glass vial. Eight ml of ethyl acetate and a proper amount of Na<sub>2</sub>SO<sub>4</sub> were added to the vial to adsorb soil moisture. The amount of Na<sub>2</sub>SO<sub>4</sub> was estimated at a 7:1 w/w Na<sub>2</sub>SO<sub>4</sub>:water depending on soil sample water content. The vial was crimped with aluminum seals containing Teflon-faced butyl-rubber septa, mixed and incubated at 80°C in a water bath overnight. After centrifuging, a portion of the supernatant was transferred into a 2 ml GC vial for fumigant analysis using the GC- $\mu$ ECD as described above, except that ethyl acetate was used as the standard and sample solvent

### **2.3 Soil Column Experiment 1**

The specific objective of this laboratory experiment was to determine the effectiveness of surface amendments with ammonium thiosulfate (ATS) and composted manure or in combination with water application or standard (HDPE) tarp on emission reduction of 1,3-D from soil columns and compared to a water seal. This experiment was designed to test whether applying chemicals or manure to soil surface with small amounts of water or in combination with the HDPE tarp could reduce emissions effectively as large amounts of water may affect fumigation efficacy. The Hanford sandy loam soil was used.

The Hanford soil with a soil water content of 5% (w/w) was packed into close-bottomed stainless steel columns (63.5 cm high x 15.5 cm i.d.) to a height of 61.5 cm and the top 2 cm was left empty in the column allowing surface water application. The columns were packed in 5 cm increments to a uniform bulk density of 1.4 g cm<sup>-3</sup>. Sampling ports for soil gases were installed at depths of 0 (under plastic tarp when applied), 10, 20, 30, 40, 50, and 60 cm below the soil surface. A Teflon-faced silicone rubber septum (3-mm thick, Supelco Inc., Bellefonte, PA) was installed in each sampling port. The septum was replaced with a new one after each use. A Teflon tube attached to the inside of each sampling port was extended to the center of the column.

For emission measurements, a flow-through gas sampling chamber (4.5 cm deep with the same diameter as the soil column) was placed on the top of the soil column and sealed to the column with a sealant-coated aluminum tape to prevent any gas leakage. After the whole column was assembled and treatment was applied, a continuous flow rate of 110 ± 10 ml min<sup>-1</sup> through the chamber was maintained by a vacuum source. The chamber inlet port was sized such that pressure inside the chamber should be no more than 0.6% below atmospheric pressure. A flow meter was used to monitor and adjust the air-flow rate after sampling tubes were replaced and between sampling times whenever needed. The flow rate usually stabilized within 5 min to the set range. The column experiments were conducted at laboratory room temperature (22 ± 3°C). Monitoring and sampling were normally done for two weeks.

One hundred µl of liquid *cis*-1,3-D (122 mg) was injected into the column center at the 30-cm depth (simulating shallow shank injection depth of 12”) through a custom-made long needle syringe to the center of the column similar to column studies conducted previously (Gao and Trout, 2006). We chose to use only *cis*-1,3-D because of the similar chemical behavior between the two isomers (*cis*- and *trans*-1,3-D), although research has shown that *cis*-1,3-D diffuses slightly faster than *trans*-1,3-D through HDPE film or soil (Yates et al., 2002; Thomas et al., 2003). Two sets of soil columns (a total of 12) were packed in the experiment. Treatments included:

- 1) Control: Dry soil (5%, w/w) soil water content, without tarp or water application
- 2) Water seal (9 mm of water were sprayed onto soil surface just before fumigant injection)
- 3) Chemical seal (*ATS 1:1*), which was achieved by spraying 6 mm of water onto soil surface followed by 3.1 ml 10% ATS solution in 3 mm H<sub>2</sub>O at 1:1 (ATS:fumigant) molar ratio
- 4) Chemical seal plus plastic tarping (*ATS 1:1 + HDPE*), i.e., Treatment 3 plus HDPE tarp
- 5) Chemical seal (*ATS 2:1*), which was similar to Treatment C with twice the amount of ATS (ATS:fumigant at a 2:1 molar ratio)
- 6) Manure amendment plus water seal (*Manure*): 66 g (dry weight) composed steer manure amendment incorporated into the top 5 cm of the soil layer (equivalent to 3.5 kg m<sup>-2</sup>, or 5% on a weight basis in the top 5 cm soil), plus one time spraying of 9 mm of water just before fumigant injection
- 7) Manure amendment plus water seal and plastic tarping (*Manure + HDPE*): Treatment 6 plus HDPE tarping

Water or the ATS solution was sprayed onto the soil surface right before fumigant injection. The HDPE tarp was sealed to the top edge of the columns with silicone sealant after columns were packed. For the treatments with the manure amendment, manure was mixed in the top 5 cm soil in the columns. Except for the treatment of *ATS 1:1* and the treatment of *Manure + HDPE*, the rest of the treatments were duplicated.

The emission of fumigant from the soil surface was sampled by continuously flushing the air above the soil column surface through ORBO 613, XAD 4 80/40mg sampling tubes at the outlet of the chambers. The tubes were replaced every 1 h for the first three days during the day and every 2 to 4 h for the remainder of the study. A chain of 2 to 6 ORBO tubes was connected to ensure trapping of all emissions overnight. The fumigant in the soil-gas phase was sampled by withdrawing a 0.5 ml of soil gas from the sampling ports with a gas-tight syringe at 3, 6, 12, 24, and 48 h, and 3, 5, 8, 11, and 14 d after fumigant injection. At the end of the experiment, soil samples from each column were taken at 10 cm depth intervals, and

soil water content and residual 1,3-D in the soil were determined. Further sample processing and analysis followed the procedures described under Fumigant Analysis in the Laboratory.

## 2.4 Soil Column Experiment 2

The specific objective of this experiment was to determine the effectiveness of water seals on reducing 1,3-D emissions from different textured soils (Atwater loamy sand, Hanford sandy loam, and Madera loam, Table 2-3) using soil columns. The column design and study methods were the same as in the soil column experiment 1. The soil columns were packed to a bulk density of  $1.6 \text{ g cm}^{-3}$  throughout for the loamy sand and  $1.4 \text{ g cm}^{-3}$  for the sandy loam and the loam soils, representing surface soil conditions in the field.

One hundred  $\mu\text{l}$  of liquid *cis*-1,3-D (122 mg) was injected into the column center at the 30 cm depth through a custom-made long needle syringe. Soil surface treatments were: 1) Control: no surface water application; 2) Initial water seal: sprayed 9 mm of tap water onto soil surface just before fumigant injection; 3) Intermittent water seals: same as treatment 2 followed by two sprayed water applications of 3 mm at 12 h and 24 h after 1,3-D application. The 9 mm of water would bring a 5 cm surface sandy loam soil or a 4 cm surface loam soil to field capacity, while only 3 mm water would bring a 5 cm surface loamy sand soil to field capacity (FC). Therefore, treatment 2 was not tested in the loamy sand soil because of its low FC requirement and instead, a proportionally reduced-amount intermittent water seal treatment (i.e., initial water 3 mm + 1 mm at 12 and 24 h) was tested. For the treatments with water additions after the fumigant injection, the top chamber was removed from the column. This would result in fumigant loss. To avoid biasing emission measurements, all the top chambers for all the treatments were opened at the same time. The emission rate during the period when the top chamber was removed was estimated based on the volume of the chamber, the time for the chamber to remain open, and fumigant concentration before and after the top chamber was removed. More than one set of column tests (a maximum of 6 columns each time in a fume hood) were conducted. The data on the sandy loam soil was obtained from the previous publication of Gao and Trout (2006) and was used for comparison with the other two soils in this study. All treatments were run in duplicate except



the reduced-amount intermittent water seal treatment used in the loamy sand. The laboratory room temperature was at  $22 \pm 3$  °C. Sampling and monitoring continued for two weeks after fumigant injection. The sampling, extraction and analysis of the emission samples and analysis of fumigant in air and soil samples were similar to that described in soil column experiment 1. The soil water content was also measured at the end of the experiment.

### **2.5 Soil Column Experiment 3**

The specific objective of this experiment was to determine the effects of soil water content on emission and distribution of 1,3-D and CP in soil columns. This experiment was designed to identify an optimum range of soil water content that could provide emission reduction benefits while also not reducing or impacting fumigant concentration and movement in soil, thereby impacting efficacy. Thus the soil water content range tested was between air-dried to maximum field capacity (FC). At the FC level (17%, w/w), soil air volume was about 25% at a bulk density of 1.4. The Hanford sandy loam soil was used for the experiment. Both 1,3-D (including *cis*-1,3-D, *trans*-1,3-D isomers) and chloropicrin (CP) were tested in the study with a similar Telone C35 composition. In order to produce a uniform soil water content soil column, relatively short columns (25 cm) were used simply because it would have taken a substantially greater time to achieve the targeted soil water condition if longer columns were employed. The relative differences in fumigant emission and changes in soil due to the different soil moisture conditions were to be observed.

Air-dried soil (water content of 5.1%, w/w) was packed 23 cm deep at a uniform bulk density of  $1.4 \text{ g cm}^{-3}$  into closed-bottom stainless steel columns (25 cm height x 15.5 cm i.d.). Gas sampling ports were installed at 0, 10, and 20 cm below the soil surface. After packing the soil columns, different amounts of water were added to the soil surface to achieve water contents of 30, 45, 60, 75, 90 and 100% of field capacity, represented by W30, W45, W60, W75, W90 and W100, respectively. All treatments were tested in duplicate columns. A soil water content of 5.1% (w/w) was equivalent to 30% FC (W30). After water application, the columns were covered immediately with aluminum foil and set aside to equilibrate for 6 weeks to achieve a uniform soil water distribution. The final soil water content for each

treatment is shown in Figure 2-1. The average soil water content in the columns within treatments ranged from 4.5% (w/w) for W30 to 16.3% (w/w) for W100, which were close to the target soil water contents based on FC of this soil (17%, w/w).

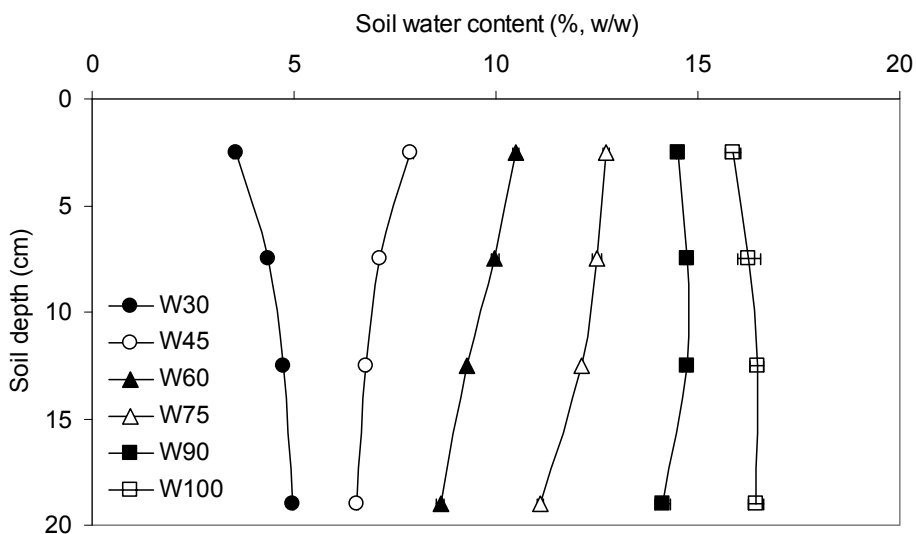


Figure 2-1. Soil water content in soil column experiment 3. Error bars are the standard deviation of duplicate samples.

Similar to the soil column experiments 1 and 2, a flow-through gas sampling chamber was installed directly above the soil columns and the connection was sealed with sealant-coated aluminum tape to prevent gas leakage. A 250  $\mu$ l fumigant solution containing 111 mg each of *cis*-1,3-D, *trans*-1,3-D, and CP was injected into the column center at the 10 cm depth using a long needle syringe. After the injection (time zero), a constant air flow rate of  $110 \pm 10$  ml  $\text{min}^{-1}$  was established through the chamber by applying a vacuum to the discharge port, and was monitored with a flow meter. Fumigant emissions and the fumigant in the soil-gas phase were sampled for 14 days at laboratory room temperature ( $22 \pm 3^\circ\text{C}$ ). Residual fumigants and soil water content were determined at the end of the experiment. The sampling procedure for the fumigant emission and soil gas as well as residual fumigants (at 5 cm increment) in the end of experiment were similar to that described under the laboratory experiments 1 and 2.

## 2.6 Field Trial 1 (Year 2005)

The specific objective of this field trial was to determine the effects of soil fumigation methods (shank-injection vs. subsurface drip-application) and surface treatments with water applications and plastic tarps on emissions of 1,3-D and CP. This field trial was conducted in fall (Oct. 26–Nov. 8) 2005 in a 1.8-ha peach replant orchard near Parlier (Latitude: 36° 35' 36.74" N; Longitude: 119° 30' 48.71" W), CA. The soil is the Hanford sandy loam with a bulk density ranging from 1.45-1.65 g cm<sup>-3</sup>. Mature peach trees were removed from this field three months prior to fumigation. The field was cultivated (deep ripped) to a 75 cm depth, disked, and land planed, and all visible root pieces were removed. The field was dry with water content varying from about 2% (v/v) near the soil surface to 10% (v/v) at a 1.2 m depth following preparation, as is common for orchard replant conditions in the arid-to-semiarid climate of the San Joaquin Valley.

### 2.6.1 Fumigation and Treatment

The fumigation trial was originally designed in replicated complete block to investigate the performance of replant peach trees for several years after fumigation with alternative fumigants (e.g., 1,3-D, CP, and methyl iodide). For all the treatments, fumigation was applied to the center 3.2 m strip of each tree row and the fumigation area was 53% coverage of the field. Selected row subsections from the field trial were modified by adding treatments for the emission studies. Two rows from one replication were chosen that included shank-injection of Telone<sup>®</sup> C35 and subsurface drip-application of InLine. Soil surface treatments were made in subsections of each row as described in Table 2-4. The target rate was the maximum rate recommended for fruit and nut crops according to the label (e.g., 50 gallons per acre of Telone C35 for broadcast applications, equivalent to 628 kg ha<sup>-1</sup>).

Telone C35 was shank-applied at an actual rate of 745 kg ha<sup>-1</sup>, which exceeded the target rate by about 20%, and InLine was drip-applied close to the target rate at 629 kg ha<sup>-1</sup>. Telone C35 was applied 46 cm deep with 7 shanks spaced 46 cm apart. InLine was applied through Netafim Streamline 60 thin-walled drip tubing (drip tape) (0.15 mm wall thickness, 0.87 L h<sup>-1</sup>

<sup>1</sup> emitter flow rate, and 30 cm emitter spacing) installed 20 cm below the soil surface on 46 cm spacing. The seven tapes in each 3.2 m treatment strip were connected through a temporary manifold to the delivery pipeline. The chemical was applied with 150 mm of irrigation water (InLine concentration = 400 mg l<sup>-1</sup>) over 25 h, which was sufficient to penetrate to about a 1.3 m depth. The long application time is required to get sufficient water penetration without water ponding during the treatment.

Table 2-4. Fumigation and surface treatments for emission study in 2005 field trial

Treatment description <sup>a</sup>	Fumigant <sup>b</sup>	Application method <sup>c</sup>	Application rate <sup>d</sup> (kg ha <sup>-1</sup> )	Soil surface treatment <sup>e</sup>
Control/shank	Telone C-35	Shank	745	Control (dry soil, disk, harrow)
HDPE/shank	Telone C-35	Shank	745	HDPE (dry soil, disk, harrow)
VIF/shank	Telone C-35	Shank	745	VIF (dry soil, disk, harrow)
Pre-irrigation/shank	Telone C-35	Shank	745	Pre-irrigate (~40 mm water sprinkler applied, disk, harrow)
HDPE/drip	InLine	Drip	629	HDPE
Water seals/drip	InLine	Drip	629	Surface water applications (12 mm water sprinkler applied pre- and post-fumigation)

<sup>a</sup> HDPE, high density polyethylene; VIF, virtually impermeable film.

<sup>b</sup> Telone<sup>®</sup> C35: 61% 1,3-D, 35% CP, 4% inert ingredients; InLine<sup>®</sup>: 61% 1,3-D, 33% CP, 6% inert ingredients.

<sup>c</sup> Fumigants were applied in strips (strip width was 3.2 m for both shank injection and drip application). InLine was applied with 15 cm of irrigation water over 25 h.

<sup>d</sup> This was the actual application rate in the treated strip. Shank injection rate was about 20% higher than the target rate.

<sup>e</sup> The dry soil had a water content ranging 0.02 cm<sup>3</sup> cm<sup>-3</sup> near the soil surface to 0.10 cm<sup>3</sup> cm<sup>-3</sup> at 1.2 m depth.

Four soil surface treatments were tested with shank injection: control (dry soil with no water application or surface treatment), HDPE tarp over dry soil, VIF tarp over dry soil, and pre-irrigation; and two treatments were tested with drip-application: HDPE tarp and water seals. Each treatment area was about 9 m x 3.2 m. Plastic tarps were applied to the strip immediately following shank-injection or prior to the drip-application. For the pre-irrigation treatment, the strip was irrigated with micro-spray sprinklers 4 days before fumigation to achieve soil water content near field capacity to a 25 cm depth, which required about 40 mm of water. All shank treatments were disked and harrowed immediately following fumigation and before tarping following the label requirements. For the water seals over drip-application treatment, 12 mm of irrigation water was applied with micro-sprinklers just before and after fumigant application.

### 2.6.2 Field Sampling

Fumigant emissions and distribution in the soil-gas phase were monitored for two weeks after fumigation. Soil samples were taken at the end of the trial for determining residual fumigants in the soil. Efficacy monitoring was included in this trial on selected nematodes. Because the field did not have significant native parasitic nematode populations, bagged samples of citrus nematode (*Tylenchulus semipenetrans*) infested soil were prepared and buried at depths of 30, 60, and 90 cm the day before fumigation in all the treatments and were retrieved four weeks later and analyzed for their survival.

Emission samples were collected using static or passive (open bottom) chambers assembled from inverted Leaktite galvanized steel buckets (Leaktite Co., Leominster, MA). At the top center of the chamber, a sampling port with a Teflon-faced silicone rubber septum (3-mm thick, Supelco Inc., Bellefonte, PA) was installed for withdrawing gas samples. For treatments with plastic tarps, the chamber bottom was sealed to the plastic film with silicone rubber sealant. For treatments with no plastic tarp, the chamber bottom was pushed into the soil about 3 cm and soil was packed around the chamber. Within 30 min after the chamber placement, a 120-ml gas sample from inside the chamber was withdrawn through the sampling port using a gas-tight syringe and through an ORBO™ 613, XAD 4 80/40mg tube

for trapping both 1,3-D and CP. The sampling tubes were immediately capped at both ends, stored on dry-ice in the field and stored in a freezer (-18°C) in the laboratory, and extracted within six weeks for fumigant analysis using the procedures described under Fumigant Analysis. Duplicate measurements were made for each treatment. Samples were collected every 2–3 h for the first 36 h and every 4 h thereafter during the day.

Based on the fumigant concentration within the chamber, capture time, chamber volume and covering surface area, the average emission rate (flux) during the capture time was calculated and compared among treatments. By assuming a linear model for concentration increase inside the chamber over time, the flux was calculated:

$$f = \frac{VdC}{A dt} \text{ or } f = \frac{V(C_2 - C_1)}{A(t_2 - t_1)} \quad (2.1)$$

where  $V$  and  $A$  are the chamber volume and covering surface area, and  $C_1$  and  $C_2$  are the concentrations measured at time  $t_1$  and  $t_2$  during chamber deployment, respectively. However, a linear model is often ideal because of the decrease of diffusion rates into the chamber as concentrations increased inside the chamber (Yates et al., 2003). Thus, the average emission rates likely underestimated actual instantaneous emission rates, especially when emissions were high. After the first 36 h following fumigation, no measurements were made at nighttime, when emissions were expected to be low. An emission flux measurement early in the morning was used to estimate emission loss during the night. Data from all the treatments were treated the same and comparisons or relative differences between treatments in reducing emissions should be valid. Cumulative emissions of 1,3-D and CP were estimated by summing up the products of the average of two consecutive emission flux values and the time interval between the two measurements over the time span of the study. Because the actual application rates for shank-injection ( $745 \text{ kg ha}^{-1}$ ) were 20% higher than the drip applications ( $629 \text{ kg ha}^{-1}$ ), direct comparisons of absolute emission values between shank-injection and drip-application was not appropriate. Total emissions were normalized by the application rate as a percent of total applied to reduce this bias.

Soil-gas sampling probes were installed following fumigation and surface treatments. The probes were stainless steel tubing (i.d. 0.1-mm), with the lower ends inserted to depths of 10, 30, 50, 70, and 90 cm below the soil surface. A set of five probes were installed in each treatment plot at Location “a” adjacent to shank-injection lines or drip tapes and Location “b” between shank-injection lines or drip tapes. A 50 ml soil gas sample at each depth was withdrawn through an ORBO™ 613, XAD 4 80/40mg tube using a custom-made sampling apparatus. This apparatus was able to collect 10 samples at a time. During sample analysis we concluded that the apparatus did not collect adequate samples at the 50 cm depth at Location “a” indicating a failure of the sampling line. Thus, fumigant concentration in the soil-gas phase at this depth was estimated based on the distribution pattern of fumigant concentrations at Location “b”. The gas samples were collected at 6, 12, 24, 30, 36, 48, 72, 120, 168, 216, and 336 h following fumigation. Processing of the sampling tubes for analysis was the same as the emission samples.

Soil samples were taken at the end of the field trial at 20 cm depth intervals to 100 cm to determine residual fumigants and soil water content. Samples were collected with an auger (5 cm i.d.) and immediately mixed, from which a portion was taken and placed into a screw-top glass jar and placed on dry ice in the field. This process was done as quickly as possible to minimize fumigant losses. Despite taking all precautions, some losses were unavoidable and thus the estimated values might be lower than actual. The jars were stored in a freezer (-18°C) in the laboratory until analyzed.

The soil temperature at a 10 cm depth from each treatment plot was measured using a Traceable® thermometer one day during the field trial.

## **2.7 Field Trial 2 (Year 2006)**

The specific objective of this field trial was to determine the effectiveness of surface seal (tarp or water) and soil treatments (irrigation and amendment with chemical and composted manure), as well as combinations of methods, to reduce emissions of 1,3-D and CP from broadcast applications of Telone C35. This field trial was conducted from Oct. 17-31, 2006

at the USDA-ARS San Joaquin Valley Agricultural Sciences Center. Other information regarding this trial is given in Table 2-2.

### 2.7.1 Fumigation and Treatment

A field strip (150 m long and 9 m wide) was prepared and soil was cultivated to a 76 cm depth for fumigation. The soil was dry. The field was irrigated with sprinklers two weeks prior to fumigation and the irrigation stopped when the wetting front reached about an 8 cm depth. The soil moisture at the top 50 cm depth was measured as an average 8% (v/v or 5.1 %, w/w), which was 30% of field capacity, on the day before fumigation.

Half of the field strip (150 m long and 4.5 m wide) was fumigated by shank injection of Telone C35 to a depth of 46 cm below soil surface. The other half was not fumigated, serving as a comparison to the fumigated area for efficacy studies (Hanson et al., 2007). The fumigation was applied on Oct.17 by TriCal Inc. using a rig with 8 shanks spaced 50 cm apart. Fumigation started at 0900 h and was completed within 5 min in one pass across the field. The actual application rate of Telone C35 was 500 kg ha<sup>-1</sup> (445 lb ac<sup>-1</sup>), which was about 20% lower than the target rate. Immediately following fumigation, the field surface was tilled with a spring tooth harrow and ring roller in a one pass operation to compact the surface soil and eliminate large pores and shank traces.

Six surface seals or soil treatments were applied with three replicates in a randomized complete block design. The treatment was applied perpendicular to shank injection lines. A 3 m wide buffer was given between blocks and treatments with water applications. The final treatment plot size was 9 m x 3 m for tarped treatments and 9 m x 9 m for irrigation treatments. The treatments included irrigation prior to fumigation, water seals after fumigation, and amendment of surface soils with potassium thiosulfate (KTS) with or without HDPE tarp or composted manure with HDPE tarp. These treatments had shown their potential in reducing fumigant emissions in previous research either in soil columns or small field plot tests (e.g., Gan et al., 1998a, b; Zheng et al., 2006; Gao and Trout, 2007). One of the main purposes of this trial was to test these treatments simultaneously under field



conditions for controlling emissions as well as for controlling soil pests. Treatments are summarized below:

- 1) Control (bare soil without irrigation or tarping)
- 2) Manure + HDPE (manure application rate was  $12.4 \text{ Mg ha}^{-1}$ )
- 3) KTS + HDPE (KTS was applied in 4 mm water at  $1000 \text{ kg ha}^{-1}$  (a.i.) or 2:1 KTS/fumigant mass ratio, which was equivalent to 1.4:1 molar ratio)
- 4) Pre-irrigation (34 mm water was applied 4 days prior to fumigation)
- 5) Intermittent water seals (13 mm water was applied immediately following fumigation, with an additional 4 mm water application at 12 h, 24 h, and 48 h, respectively)
- 6) Intermittent KTS applications [KTS at  $1000 \text{ kg ha}^{-1}$  (a.i.) or 2:1 KTS/fumigant ratio immediately following fumigation, and at  $500 \text{ kg ha}^{-1}$  (a.i.) or 1:1 ratio at 12, 24, and 48 h using the same amount of water as treatment #5]

For treatment 2 (Manure + HDPE), composted steer manure purchased from a local garden center was spread over the soil surface immediately after fumigation and surface preparation, i.e., the organic material was not incorporated into the soil. The manure application rate is commonly used by many growers as a source of fertilizer or material for maintaining soil-properties in the region. The HDPE tarp was installed immediately after the manure was applied.

For treatment 3 (KTS + HDPE), KTS<sup>®</sup> was obtained in the 50% liquid formula (KTS, 0-0-25-17S) from Tessengerlo Kerley (Phoenix, AZ), and was applied in 4 mm water using a 3 m wide spray bar. The HDPE tarp was hand-applied to avoid the compaction of wet surface soils by equipment after application of the KTS solution.

For treatment 4 (pre-irrigation), 34 mm water was applied four days prior to fumigation using a sprinkler-irrigation system with one sprinkler at each corner of each 9 m x 9 m plot. This amount of water was expected to result in a soil water content of 60% of FC for the top 30 cm of soil.

For treatment 5 (intermittent water seals), the water seal was applied to each plot using the sprinkler-irrigation system described in treatment 4. Thirteen mm of water was initially applied following fumigation to moisten the top 8 cm of soil. Application of this amount of water took about 1.5 h following fumigation. For subsequent water applications at 12, 24, and 48 h, 4 mm of water were applied in about 25 min. The small water applications were to compensate for evaporation losses near the soil surface, so as to maintain a moist surface.

For treatment 6 (intermittent KTS applications), the application schedule and the amount of water used in delivering KTS to soil surface were the same as treatment 5. At the initial application following fumigation, the KTS solution at a 2:1 KTS/fumigant (w/w) ratio was applied in the last 30 min of sprinkler irrigation. For the subsequent application, i.e., at 12, 24 and 48 h, a 2:1 KTS solution was applied in 4 mm water.

### 2.7.2 Field Sampling

Similar to the 2005 field trial, sampling for air emissions and soil gas distribution of applied fumigants (1,3-D and CP) was conducted for two weeks following fumigation. At the end of the sampling period, soil samples were collected for residual fumigants in the soil. Soil water content was determined for the control and pre-irrigated plots on the day before fumigation, 4 days later, and at the end of the field trial for all plots.

Air emission sampling, sample processing and analysis followed the procedures similar in the 2005 field trial with minor modifications indicated below. Briefly, emissions were measured using static (passive) flux chambers. In 15 min after the chamber placement, a 100 ml gas sample was withdrawn through the sampling port and the XAD tube at a flow rate between 100-200 ml min<sup>-1</sup>. The short chamber capture time was used to reduce the potential of underestimation of flux. Sampling was done following a similar schedule to the 2005 field trial. The XAD sampling tubes were immediately capped after collection, stored on dry ice in the field, and transferred into an ultra-freezer (-80°C) in the laboratory. The fumigants were extracted from the tubes and analyzed within 4 weeks. Storage of the sample extracts did not result in significant loss of fumigants.

Fumigant in the soil-gas phase was sampled using the same methods as described in the 2005 field trial. The same applies to soil samples at the end of the trial to determine residual fumigants in the soil. Soil temperature was also monitored for one day during the trial.

The effect of surface sealing treatments on efficacy was included in this trial. Selected nematodes and weeds were investigated by collaborators. The pest control results are not reported here; but can be found in Hanson et al., (2007).

## **2.8 Field Trial 3 - 2007**

The objective of the 2007 field trial was specifically to determine the effects of soil amendments with composted manure with or without water applications on fumigant emission reduction and the potential impact on pest control efficacy. The trial was conducted at the USDA-ARS San Joaquin Valley Agricultural Sciences Center in November, 2007. Other information regarding this trial is given in Table 2-2.

### **2.8.1 Fumigation and Treatment**

A field site (160 m long and 10 m wide) was cultivated to a 75 cm depth and irrigated two weeks before fumigation to achieve adequate soil moisture conditions for the application. Soil water content determined two days before fumigation averaged 12.0% v/v (45% of field capacity) in the top 50 cm of soil. To determine the effect of organic amendment on fumigant (1,3-D and CP) emissions, the following surface treatments were applied:

- 1) Control
- 2) Manure at 12.4 Mg ha<sup>-1</sup>
- 3) Manure at 24.7 Mg ha<sup>-1</sup>
- 4) Manure at 12.4 Mg ha<sup>-1</sup> + HDPE tarp
- 5) Water seals (11 mm water sprinkler-applied immediately following fumigation and three subsequent applications of 4 mm water at 12, 24, and 48 h, respectively)
- 6) Combination of treatments 2 and 5 (Manure at 12.4 Mg ha<sup>-1</sup> + water seals).

Composted manure was obtained from Earthwise Organics (Bakersfield, CA) and used for all manure treatments except Treatment 4. The composted material was prepared from 100% dairy manure feedstock using a windrow composting process. The windrows had water added and were mechanically turned on a frequent basis. Active compost was maintained under aerobic conditions at a minimum temperature of 55°C, and a maximum of 65°C for a pathogen reduction period extending 15 days or longer to successfully undergo “Processes to Further Reduce Pathogens (PFRPs)”, as described in Title 14, California Code of Regulations Section 17868.3. During this period, there was a minimum of five turnings of the windrow. Duration in the windrows is typically 90 to 120 days, after which it was stockpiled for several months. The composted materials had a normal average water content of 65%, organic matter of 37%, ash of 64%, total N of 1.6%, total P (P<sub>2</sub>O<sub>5</sub>) of 1.8%, and total K (K<sub>2</sub>O) of 2.8% (all on dry weight basis) (Joe Voth, Paramount Farming Company, Bakersfield, CA, personnel communication, 2008).

All manure application rate treatments refer to fresh weight and material obtained for this trial had an average water content of 55% (w/w). The manure material was spread evenly over the soil surface within a 3 m x 9 m plot prior to fumigation and was incorporated into surface (about 15 cm) soils with a disc and roller operation following fumigant application. The incorporation was restricted to surface soils to ensure that the organic material would react with fumigants only in surface soils and would not reduce fumigant concentrations or pest control efficacy in the deeper soil profile. Treatment 4 was included to compare to a similar treatment tested in the 2006 field trial when the manure was not incorporated into the soil. Thus, the same materials were used for the two treatments (steer manure obtained from a local garden supply store). The manure application rates of 12.4 Mg ha<sup>-1</sup> and 24.7 Mg ha<sup>-1</sup> (~5 and 10 tons per acre) represent commonly used soil amendment rates in conventional farming for maintaining/improving soil physiochemical properties.

On 12 Nov. 2007, Telone C35 was shank-applied using a rig with 9 shanks spaced 50 cm apart and a 45 cm injection depth. The application rate was 553 kg ha<sup>-1</sup>, ~15% lower than the target rate. Following fumigant injection, the surface soil was compacted with a disc and a ring roller operation followed by tarp placement and irrigation treatments. Similar to the

2006 field trial, water seals were applied with quarter-circle sprinklers that were installed at each corner of the 9 m x 9 m plots. All operations including manure incorporation and installation of tarps were completed within 30 minutes after fumigant injection. The initial water seal application started about 3 h following fumigation and took about 1.5 hours to complete. The 11 mm of water was sufficient to moisten the top 10 cm of soil to field capacity. All treatments were replicated three times in a randomized complete block design. The blocks and treatments were distributed along a 160 m long strip of the field.

### 2.8.2 Field Sampling

Emissions, fumigant in the soil-gas phase, and soil residual fumigants at the end of the fumigation were sampled similarly to the previous field trials. The major difference from the previous trials was that in the 2007 field trial, emission sampling was accomplished using dynamic flux chambers (DFCs). Twenty four DFCs were constructed in 2007 following similar designs reported in Gao et al. (1997) and Wang et al. (1999a). The DFCs consist of two components, a flow-through chamber and an automated sampling and data module (Gao et al., 2008a). Unlike passive chambers that are labor-intensive and non-continuous, the DFCs allow continuous sampling during the course of the monitoring period, i.e., including day and night. The flow-through chambers were made to cover a soil surface area of 51 cm x 25 cm. The chambers were installed near the center of each treatment plot (for a total of 18 plots), perpendicular to shank lines after fumigant injection. A constant air flow (5 L min<sup>-1</sup>) was maintained through the chamber using a vacuum source. The inflow air was collected 10 m away from the plots and 3 m above the ground through a PVC pipe (i.d. 10 cm). The inflow air was sampled to obtain background levels of each fumigant, which turned out to be negligible most of the time. A small portion (100 ml min<sup>-1</sup>) of the outflow air was sampled by a split sampling line connected to XAD sampling tubes for trapping 1,3-D and CP. For the first three days, two XAD sampling tubes were used in series to avoid breakthrough when the emission flux was high. Sampling tubes were changed every 3 h for the first 4 days and every 6 h thereafter for the remaining days in this trial. At the end of each sampling period, the XAD tubes were replaced with new ones. When a steady state air flow is established through

the chamber, the flux ( $f$ ) during a sampling period of time can be calculated from flow and gas concentration measurements using:

$$f = \frac{Q}{A}(C_{out} - C_{in}) \quad (2.2)$$

where  $Q$  is the total air flow through the chamber,  $A$  is the soil surface area covered by the chamber,  $C_{in}$  and  $C_{out}$  are the gas concentrations at the inlet and the outlet, respectively. The inlet concentration,  $C_{in}$ , is usually negligible for contaminants from a clean air source. When a split sampling line is used, as is the case of sampling scheme we used, a multiplier (dilution factor, i.e., ratio of total chamber flow to sample flow), needs to be inserted into Eq. 2.2.

Deployment of the DFCs presented some problems during the first year due to unexpected condensation problems when temperatures dropped, often occurring during the nighttime. The condensation caused malfunctioning or stopping of air flow meters in the system. This problem was suspected to result in some over-estimation of flux. The problems were later addressed by adding a heating unit in the flow path of the DFC system (Gao et al., 2009). Thus, caution is needed in interpretation of the 2007 field trial emission data.

Fumigant in the soil-gas phase and residual fumigants in soil at the end of the trial were sampled as in the previous trials. For the 2007 field trial, the soil sampling depth was only down to 70 cm because the previous trials showed negligible fumigant concentration below this depth. Soil temperatures at 10 cm below soil surface were measured for one day. Efficacy studies on selected nematode, weed and pathogen species were conducted by other research scientists in the Water Management Research Unit and will be reported elsewhere.

## 2.9 Statistical Analysis

Statistical analysis on treatment effects was performed when appropriate. In order to describe the time-series cumulative emission data for soil column experiment 3, a regression analysis was performed using a three-parameter sigmoidal model (Hill equation; Sigma Plot version

10.0);  $Y = a * X^b / (c^b + X^b)$ , where  $Y$  is the fumigant cumulative emission (% of applied),  $X$  is the time (h),  $a$  is the predicted maximum emission loss,  $b$  is Hill or sigmoidicity coefficient, and,  $c$  is the time when the emission equals half of the predicted maximum emission loss (h). For the 2006 and 2007 field trials, SAS 9.1.2 or 9.2 (SAS Institute Inc.) was used to determine treatment effects on the fumigant peak emission flux shortly after fumigation, cumulative emission loss, soil residual fumigant concentrations, surface soil water contents and temperature, etc. A general linear model (Proc GLM) was used to conduct the analysis of variance (ANOVA) and treatment means were separated using either Tukey's HSD (honestly significant difference) (2006 trial) or Fisher's Protected Least Significant Difference (LSD) procedure (2007 trial) with  $\alpha = 0.05$ .

### **3.0 RESULTS AND DISCUSSIONS**

The major results for each experiment or field trial have been reported in published journal articles. These papers include McDonald et al., 2008 (Environ. Sci. Technol.); McDonald et al., 2009 (J. Environ. Qual.); Qin et al., 2009 (Atmos. Environ.); Gao et al., 2008b (Sci. Total Environ); Gao et al., 2008c (J. Environ. Qual.); and Gao et al., 2009 (J. Agric Food Chem.). Discussions about the results and conclusions are revisited after integrating all research data obtained under this project.

#### **3.1 Soil Column Experiment 1**

##### **3.1.1 Emission Flux**

The emission flux of 1,3-D from the column treatments is shown in Figure 3-1. The control (dry soil without surface treatment) resulted in the highest emission peak ( $16 \mu\text{g m}^{-2} \text{s}^{-1}$ ) at about 15 h after injection, and then rapidly declined with time. Water seals, as well as chemical and manure-amended surface soil treatments gave a lower peak 1,3-D emission within 15 h but the rate was sustained for up to 36 h. Initial water application (water seal) had a peak emission flux of  $10 \mu\text{g m}^{-2} \text{s}^{-1}$ . Manure amendment with water resulted in further

reduction of 1,3-D emissions with a peak emission flux of  $6.3 \mu\text{g m}^{-2} \text{s}^{-1}$ . The HDPE applied over the manure-treated soil further reduced peak emission flux to  $2.7 \mu\text{g m}^{-2} \text{s}^{-1}$  and peak time was delayed to 29 h. Chemical amendment with ATS at a 1:1 molar ratio had a peak emission flux of  $7.9 \mu\text{g m}^{-2} \text{s}^{-1}$ . Doubling the ATS (2:1 ATS) reduced emissions only slightly to  $6.0 \mu\text{g m}^{-2} \text{s}^{-1}$ . The 1:1 ATS plus HDPE tarp treatment had a peak emission flux of  $4.4 \mu\text{g m}^{-2} \text{s}^{-1}$  occurring at 33 h after injection. Past studies have consistently shown that HDPE alone is not effective in reducing 1,3-D volatilization (Gan et al., 1998c; Thomas et al., 2006). These data suggest that HDPE used in combination with surface soil treatments including water, ATS, and manure can be effective. The differences in emissions after 108 h were small for all treatments (data not shown). At the end of the experiment (2 wk), all treatments showed very low emission rates of  $0.0\text{-}0.3 \mu\text{g m}^{-2} \text{s}^{-1}$ .

### 3.1.2 Cumulative Emission Loss

All surface treatments reduced emissions to various extents (Fig. 3-2, Table 3-1). Over a 2 wk period, the cumulative emission was 51% of total applied for the control, 43% for the water seal, 39% for 1:1 ATS, 29% for both 2:1 ATS and manure amendment, 24% for 1:1 ATS + HDPE, and 16% for manure + HDPE. All the surface treatments showed a greater relative emission reduction in the first few days than that over the 2-wk period. When compared to the control treatment, initial water seal, 1:1 and 2:1 ATS, and manure amendment reduced emissions about 36, 41, 57, and 57%, respectively for the initial 48 h of the study. These values decreased to 21, 22, 42, and 43%, respectively, for the 2-wk period. The total emission reduction results in this column experiment show that the combinations of HDPE tarp with manure or ATS treatment and with water are the most effective. The HDPE tarp may help to retain 1,3-D to interact with ATS or manure for longer periods of time causing greater degradation and, consequently, reduced emissions. Thus, there may be benefits in minimizing emissions by applying the HDPE tarp over chemical or manure amendments, although this would increase the cost. Without the tarp, the manure treatment at 5% (w/w) was comparable with the ATS application at a 2:1 molar ratio. The effectiveness of the manure treatment may be due partially to the water seal effect as well as the substantially lower amount of fumigant in the column.



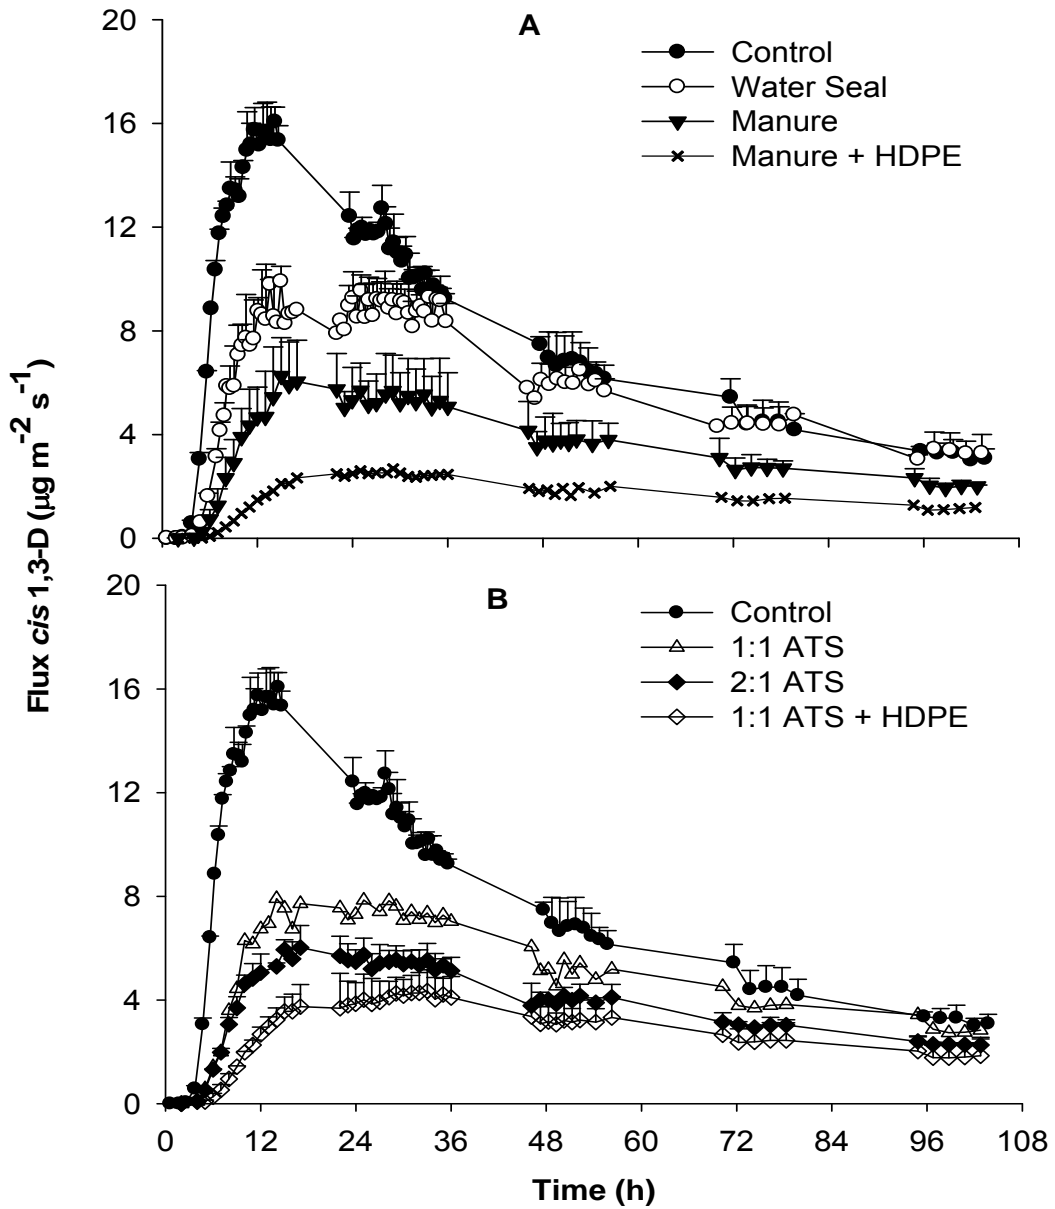


Figure 3-1. Emission rate of *cis*-1,3-dichloropropene in soil column studies- (A) water seal and manure treatments; (B) ammonium thiosulfate treatments in soil column experiment 1. Error bars are standard error of the mean of duplicate samples

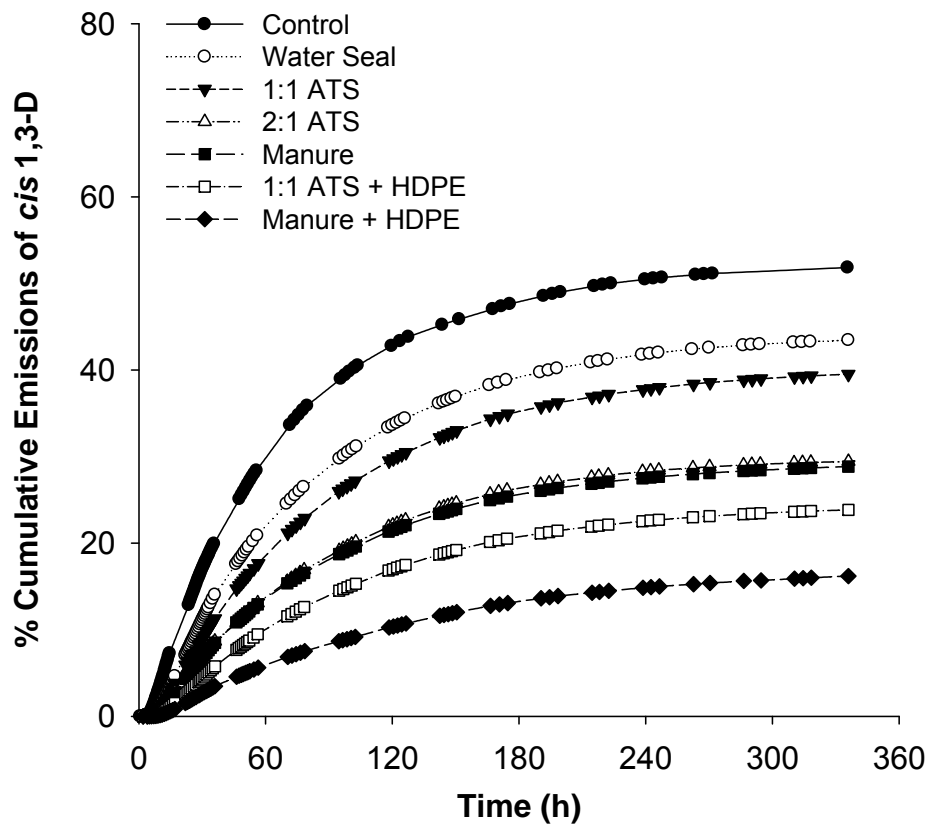


Figure 3-2. Cumulative emissions of *cis*-1,3-dichloropropene from soil column treatments over two weeks in soil column experiment 1.

### 3.1.3 1,3-D Concentrations in Soil-Gas Phase

The distribution of 1,3-D in the soil-gas phase over time is shown in Fig. 3-3. The greatest concentration of 1,3-D was at the first sampling time (3h) near the injection depth. A fairly uniform 1,3-D distribution at about  $1 \text{ mg L}^{-1}$  in the column gradually established within 48h for all treatments. By the end of the experiment (2 wk), the soil gas phase had concentrations at or near  $0.1 \text{ mg L}^{-1}$  for all treatments.

The distributions of 1,3-D over time in the soil-gas phase were similar for all ATS and manure surface treatments indicating the surface treatment would not have a great impact on

fumigant concentrations in the soil profile if managed properly. The initial concentration of 1,3-D in the soil-gas phase in the ATS or manure were slightly lower ( $5\text{-}6 \text{ mg L}^{-1}$ ) compared to the control ( $8 \text{ mg L}^{-1}$ ). 1,3-D could be degraded rapidly by subsurface applications of ATS in the root-zone (Wang et al., 2000; Papiernik et al., 2004). This indicates that 1,3-D diffuses fairly quickly in soil and applying ATS to the soil surface can effectively reduce 1,3-D concentrations throughout the soil profile and achieve emission reductions. The slightly reduced 1,3-D concentration with the ATS application may not mean a reduced fumigation efficacy as some studies indicated, and ATS showed no negative impact on fumigation efficacy (Gan et al., 1998a; 2000). Similarly, the addition of organic amendments to the soil may reduce fumigant exposure to soil pests due to the strong interaction between fumigant and OM (Kim et al., 2003). Water seals appeared to slightly decrease the concentration of 1,3-D in the soil-gas phase during the initial periods of this study.

#### 3.1.4 Residual and the Fate of 1,3-Dichloropropene

Residual 1,3-D at the end of the experiment for most samples was low ( $0.3 \pm 0.1 \text{ } \mu\text{g g}^{-1}$  soil) for all soil depths. However, soil samples from the top 5 cm manure-treated columns contained up to  $10.4 \pm 1.9 \text{ } \mu\text{g g}^{-1}$  where organic matter was added. These results indicate greater residual bound 1,3-D via possible sorption with organic matter. Work by Kim et al. (2003) found that soil organic matter content could potentially be used as an indicator to predict adsorption capacity for 1,3-D.

The amount of 1,3-D degraded in soil columns during the experiment was estimated by subtracting total emission loss, fumigant in the soil-gas phase, and residual fumigant remaining in soil (Table 3-1). The emissions of 1,3-D ranged from 16 % (manure + HDPE) to 51 % (control) of the total amount applied. The amount of 1,3-D in the soil-gas phase at the end of the experiment was very low, from 0.1 to 0.2 % of applied. Residual 1,3-D in the solid-liquid phase ranged from 3 to 5 % of applied for most treatments. The greatest residual 1,3-D was found in the manure (13% of applied) and manure + HDPE (17% of applied) treatments.

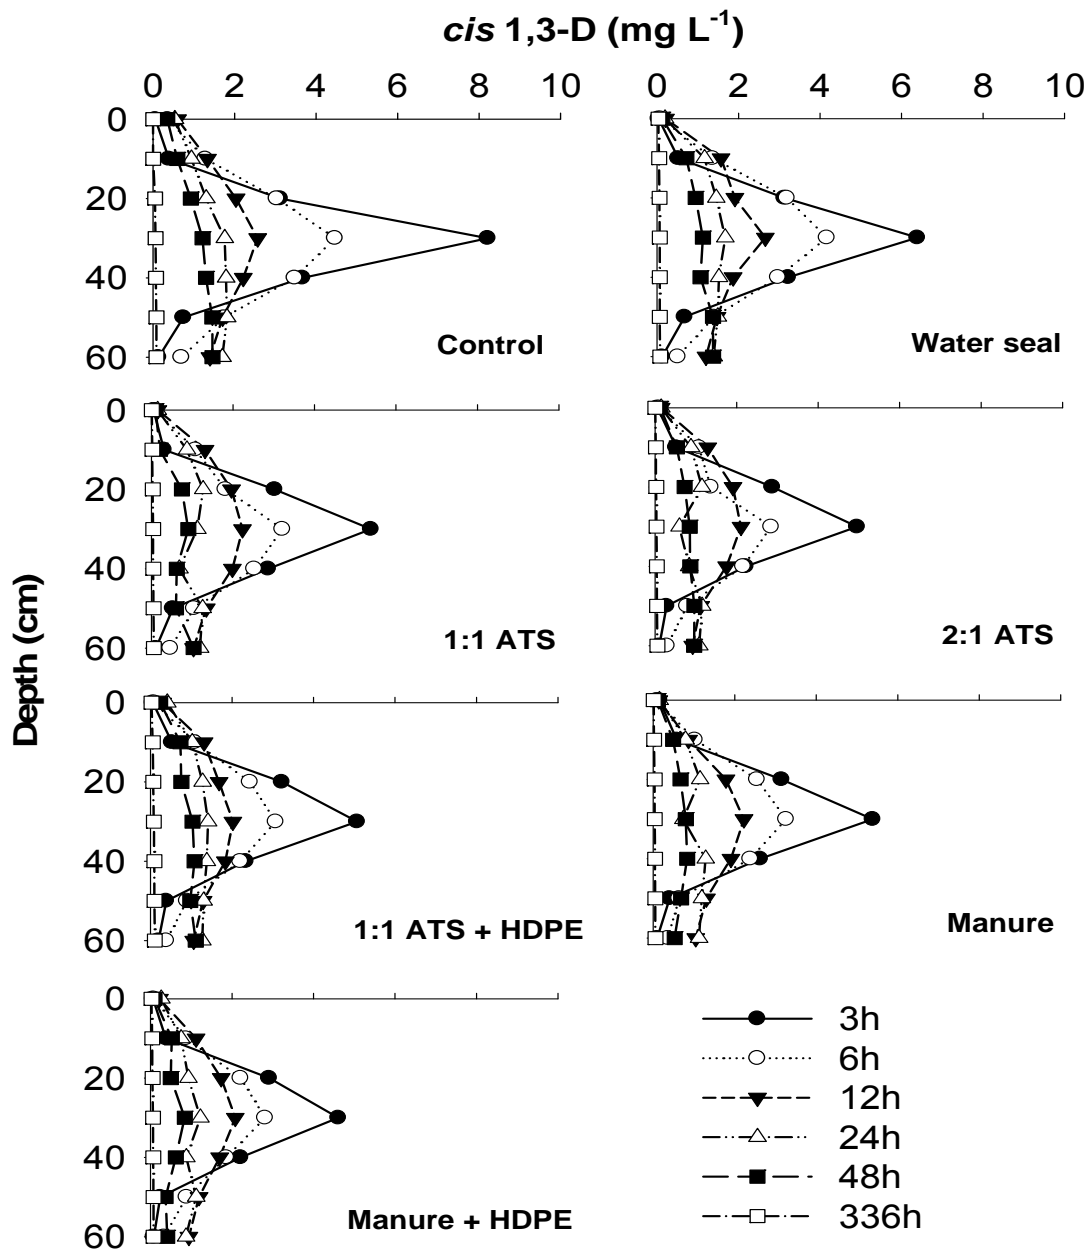


Figure 3-3. Concentration of *cis*-1,3-dichloropropene (1,3-D) in the soil-gas phase from soil column treatments in soil column experiment 1

Table 3-1. Fate of 1,3-D in soil column experiment 1

Treatment †	Cumulative emission ‡	Solid/liquid phase ‡	Gas phase ‡	Degraded §
% of applied ¶				
Control	50.6 (2)	3.3 (2)	0.1 (0.1)	46.0
Water seal	43.4 (5)	3.9 (2)	0.1 (0.1)	52.6
1:1 ATS	39.5	2.9	0.2	57.4
2:1 ATS	29.5 (4)	4.5 (1)	0.2 (0)	65.9
Manure	28.8 (3)	12.6 (3)	0.2 (0)	58.4
1:1 ATS + HDPE	23.9 (7)	4.7 (0)	0.2 (0.1)	71.2
Manure + HDPE	16.2	17.3	0.2	66.3

† ATS, ammonium thiosulfate; HDPE, high density polyethylene.

‡ Measured.

§ Calculated by difference of measured from applied.

¶ Values in parentheses are standard deviations of duplicate column measurements.

### 3.1.5 Conclusion

This experiment determined the effectiveness of ammonium thiosulfate (ATS) and composted manure amendments into surface soil in combination with water application or HDPE tarp on reducing emissions of 1,3-D from soil column treatments. Surface treatments included a control, water seal (single water application at the time of fumigant injection), ATS amendments at 1:1 and 2:1 molar ratio of ATS:fumigant, composted steer manure at 5% (w/w), and HDPE tarp over 1:1 ATS or the manure amendment. Cumulative 1,3-D emission loss over two weeks was greatest for the control (51% of applied). The HDPE tarp over ATS and manure treatments had the lowest 1,3-D emissions at 24 and 16%, respectively. Treatments with ATS or manure alone reduced 1,3-D emissions (29–39%) more effectively than water seals (43%) and further benefit was gained with the addition of the HDPE tarp. Amendment of surface soil with organic materials shows greater potential in minimizing fumigant emissions according to this soil column experiment. The effectiveness of OM on

emission reduction agreed with other researchers. It should be noted that much lower fumigant application rates are often used for soil column tests compared to field conditions.

## **3.2 Soil Column Experiment 2**

### **3.2.1 Soil Water Content**

Water applications alter surface soil moisture conditions, which has a direct impact on fumigant emissions. The soil water content in soil columns determined at the end of the experiment is shown in Figure 3-4. Water distribution was relatively uniform throughout the columns for the control with minor evaporation loss at the surface with the averages of 1.8% (v/v, 32% FC) for the loamy sand, 7.3% (v/v, 31% FC) for the sandy loam, and 7.2% (v/v, 22% FC) for the loam. Water application treatments increased soil water content mostly in the surface layers (0-30 cm). The high intermittent water seal treatment (9 mm + 3 mm at 12 h + 3 mm at 24 h) resulted in the highest soil water content in each soil type. The sandy loam soil had more downward movement of water applied, which might be associated with its lower bulk density than the loamy sand soil.

The surface (0-10 cm) soil retained the highest water content from the water applications. For loamy sand soil, it was 12.7% (v/v, 145% FC) with the high intermittent water treatment and was reduced to 6.4% (v/v, 74% FC) in the lower-amount intermittent water treatment. For the sandy loam and loam soils, the water content in the surface soil was 55% and 58% of their FC values, respectively, for the intermittent water seal treatment. The bulk density of the loamy sand was higher than that for the other two soils (1.6 vs. 1.4 g cm<sup>-3</sup>). As a result, the air volume in the loamy sand surface soil was 27% compared to 34% for the sandy loam and 29% for the loam soil for the intermittent water treatment.

### **3.2.2 Emission Flux**

The emission flux of 1,3-D from the column treatments is shown in Figure 3-5. Peak emission flux decreases as the soil texture becomes finer. For the control treatment, the peak

1,3-D emission from the loamy sand was  $20 \mu\text{g m}^{-2} \text{s}^{-1}$  occurring 11 h after injection,  $16 \mu\text{g m}^{-2} \text{s}^{-1}$  at 15 h from the sandy loam, and  $11 \mu\text{g m}^{-2} \text{s}^{-1}$  at about 15 h from the loam. The difference in emission flux for the three soils are likely due to differences in soil texture reflected in different clay content, organic matter and capacity to retain soil water (Figure 3-4, Table 3-2). All these are important factors affecting fumigant degradation and transport. Increasing soil water content retards soil gas diffusion and can result in reduced emissions from the soil surface. Although the loamy sand had a higher bulk density compared to the other two soils, the dominance of larger primary open pore space between soil particles and lower soil water content led to higher emissions in the control. The loam soil had higher clay and organic matter content than the coarser soils and was able to effectively adsorb or retain 1,3-D, thus suppressing the diffusion process leading to lower emission rates.

The peak flux was reduced about 35% from the control by the initial water seal treatment for both the sandy loam and loam soils (Figure 3-5) as compared to the control, in addition to the delayed peak flux occurrence time. Additional 3 mm water applications at 12 and 24 h further suppressed peak 1,3-D emissions by about 55% from the control for the sandy loam and loam, and about 75% for the loamy sand soils. After the final water application at 24 h, 1,3-D emission rates were stabilized and then gradually decreased with time for all three soils. The reduced-amount intermittent water seal (3 mm at 0 h, and 1 mm at 12h and 24 h) in the loamy sand had little influence on emission reduction compared to the control (Fig. 3-5). Water applied to the loamy sand was expected to infiltrate quickly due to large particle size (sands) with larger pores compared to the finer-textures soils with smaller particles (clays, silts). Thus, it is commonly thought that forming an effective barrier to fumigants with water seals might be difficult in sandy soils. This appeared to be the case for the low amount of intermittent water treatment (3 +1 + 1 mm water). For the high amount of intermittent water treatment (9 + 3 + 3 mm water), however, water applied to the loamy sand soil did not demonstrate significant downward movement in soil columns and most of the water retained in the 0-20 cm soil layer could have effectively formed a saturation layer (Fig. 3-4). As a result, significantly lower emission rates were observed in the high-amount intermittent water seal treatment. All surface treatments had similar emission rates beyond 108 h in this study

and decreased to  $0.0\text{-}0.3 \mu\text{g m}^{-2} \text{s}^{-1}$  by the end of the experiment, i.e., two weeks after fumigant injection (data not shown).

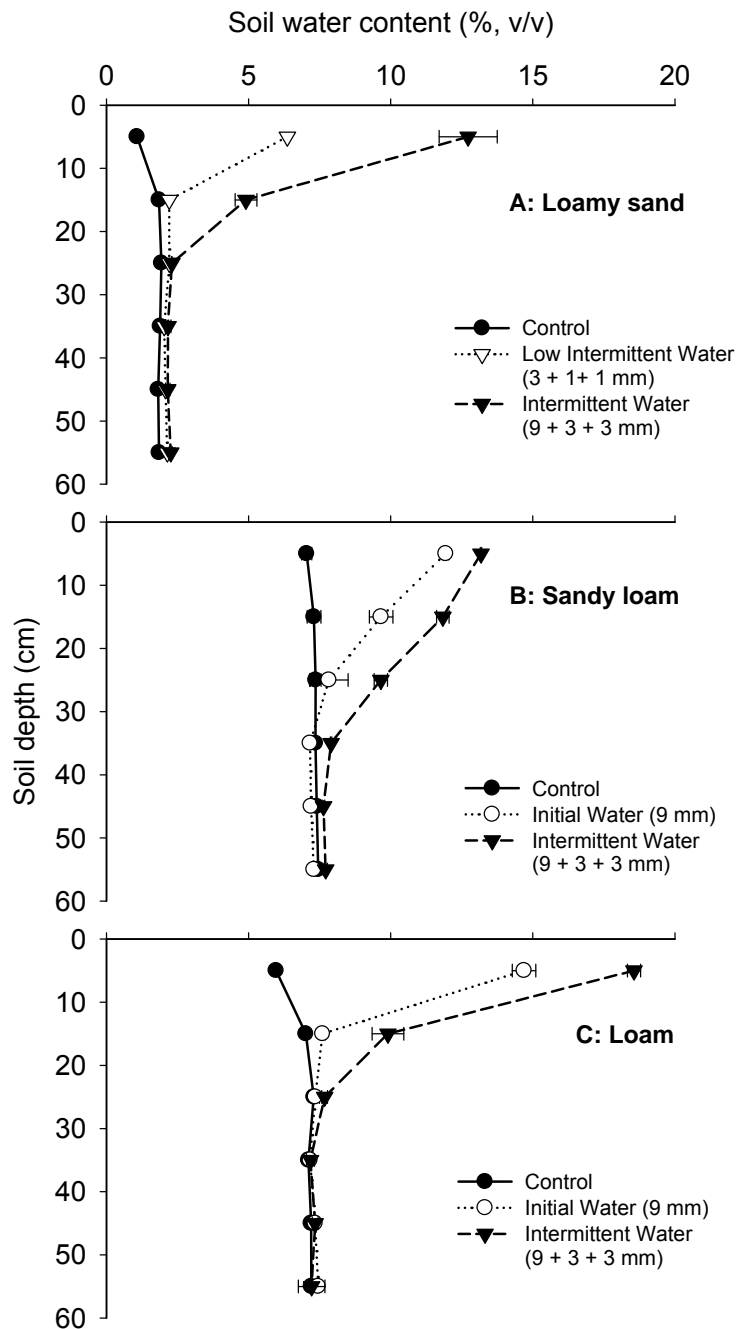


Figure 3-4. Distribution of soil water content (% v/v) with depth in soil column experiment 2: A) Loamy sand, B) Sandy loam, C) Loam. Error bars are the standard deviation of duplicate samples.



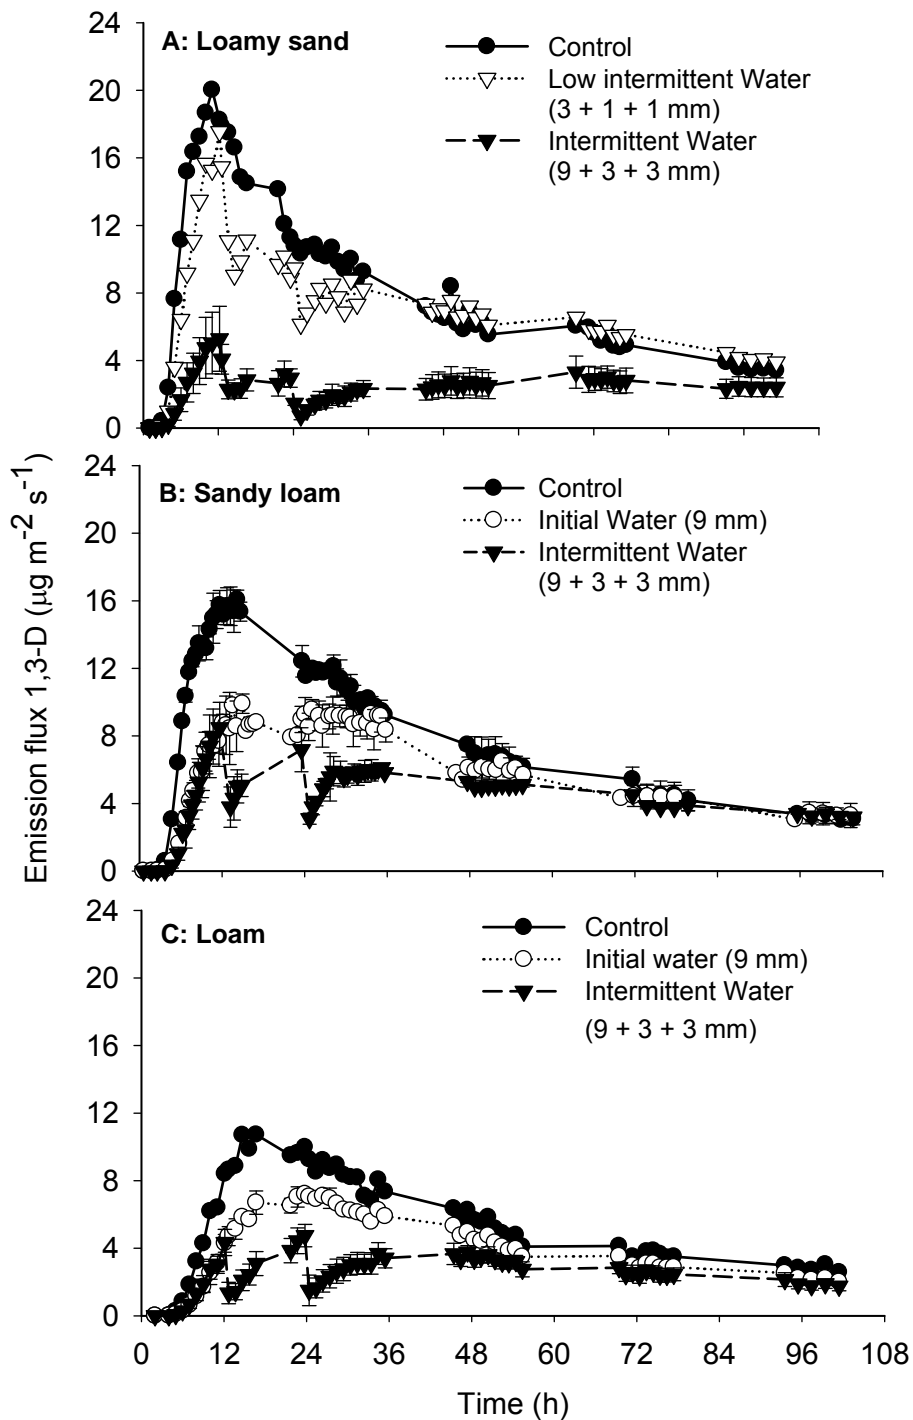


Figure 3-5. Comparison of 1,3-dichloropropene (1,3-D) emissions from different soil surface treatments: A) Loamy sand, B) Sandy loam, C) Loam in soil column experiment 2. Error bars are the standard deviation of duplicate samples.

### 3.2.3 Cumulative Emissions

Cumulative emissions for all the treatments are given in Table 3-2. For each soil, the intermittent water treatment (9+3+3 mm) had the lowest cumulative emissions, which was reduced by 53%, 19%, and 50% for loamy sand, sandy loam, and loam, respectively, compared to the control, over two weeks. The higher porosity in the sandy loam soil (34%) compared to the other soils (27-29%) might contribute to the relatively smaller effect of intermittent water treatments on 1,3-D emission reduction in the sandy loam. The results suggest that a sufficient amount of water is the critical factor to reducing emissions in any type of soils. With the same treatment, emission losses were usually higher in coarse-textured soil compared to fine-textured soil. An exception was for the loamy sand with the higher amount of water seals which had similar emission reductions (53% reductions over a 2-wk measurement) as the loam soil due to the high surface soil water content and low porosity as discussed above. These results indicate that with sufficient amounts of water, intermittent water seals can also reduce emissions significantly in coarser-textured soil. Similar to soil experiment 1, emission reductions for the first two days following water applications were greater than the whole 2-wk monitoring period (data not shown). Water seals can be important in protecting workers and bystanders from acute exposure following fumigant injection.

### 3.2.4 1,3-D in Soil-Gas Phase and Soil Residual 1,3-D

The distribution of 1,3-D in the soil-gas phase over time is shown in Figure 3-6. The greatest concentration of 1,3-D was at the first sampling time (3 h) near the injection depth (30 cm). The fumigant dispersed quickly in the columns and a relatively uniform 1,3-D concentration ( $\leq 2 \mu\text{g cm}^{-3}$ ) was established within 24 h. The difference in fumigant concentration in the soil-gas phase was greater between the soils than between the water treatments within a soil. The loam soil had about 10-20% lower fumigant concentrations compared to the other two soils. The relatively higher clay and organic matter content in the loam soil would have contributed to faster fumigant degradation or adsorption. Upon completion of the experiment (2 wk), the soil gas-phase concentrations were less than  $0.2 \mu\text{g cm}^{-3}$  for all columns.

Table 3-2. Fate of 1,3-D two weeks after injection into soil columns in Soil Column

Experiment 2.

Soil type	Treatment	Cumulative	Solid/liquid	Gas	Degraded <sup>‡</sup>
		emission <sup>†</sup>	phase <sup>†</sup>	Phase <sup>†</sup>	
		% of applied <sup>§</sup>			
Atwater loamy sand	Control	56.4 (0)	1.6 (0)	0.12 (0)	41.9
	Low intermittent water seals (3 mm + 1 mm at 12 and 24 h)	51.5	1.8	0.1	46.6
	Intermittent water seals (9 mm + 3 mm at 12 and 24 h)	26.3 (5.9)	2.3 (0.1)	0.39 (0)	71.0
Hanford sandy loam	Control	50.6 (1.6)	3.3 (1.6)	0.08 (0.11)	46.0
	Water seal (9 mm)	46.1 (1.1)	2.6 (0.5)	0.02 (0.03)	51.2
	Intermittent water seals (9 mm + 3 mm at 12 and 24 h)	41.1 (3.8)	3.4 (1.4)	0.16 (0.14)	55.3
Madera loam	Control	42.7 (0)	4.8 (0)	0.25 (0)	52.3
	Water seal (9 mm)	31.0 (0.2)	4.3 (0.4)	0.25 (0.03)	64.5
	Intermittent water seals (9 mm + 3 mm at 12 and 24 h)	21.3 (3.6)	3.7 (0.1)	0.26 (0)	74.8

<sup>†</sup> Measured.<sup>‡</sup> Calculated by difference of measured values and applied amounts.<sup>§</sup> Values in parentheses are the standard deviation of duplicate column measurements.

In the soil column test, water seal treatments did not reduce fumigant concentrations in the soil-gas phase in these three soils. Similar results were observed in other cases (e.g., Gao and Trout, 2007; Thomas et al., 2003; 2004) when emissions were reduced from increasing soil water content, fumigant concentration in the soil air was not affected. As water applications increased soil water content, mostly in the surface layer, this helped retain fumigant in the soil profile and reduce fumigant diffusion and emission. Caution must be taken because the application of too much water would result in poor fumigant dispersion and reduce fumigant

efficacy (McKenry and Thomason, 1974). Thus, the amount of water used in surface seals must be appropriate so that it does not sacrifice efficacy.

Residual 1,3-D in the soil (solid and liquid phases) was measured at the end of the experiment (Table 3-2). Although residual 1,3-D was low in all soils, concentrations tended to be highest in the fine-textured soil, likely because of the strong binding to clay and organic matter particles (Gan et al., 1994; Kim et al., 2003; Xu et al., 2003).

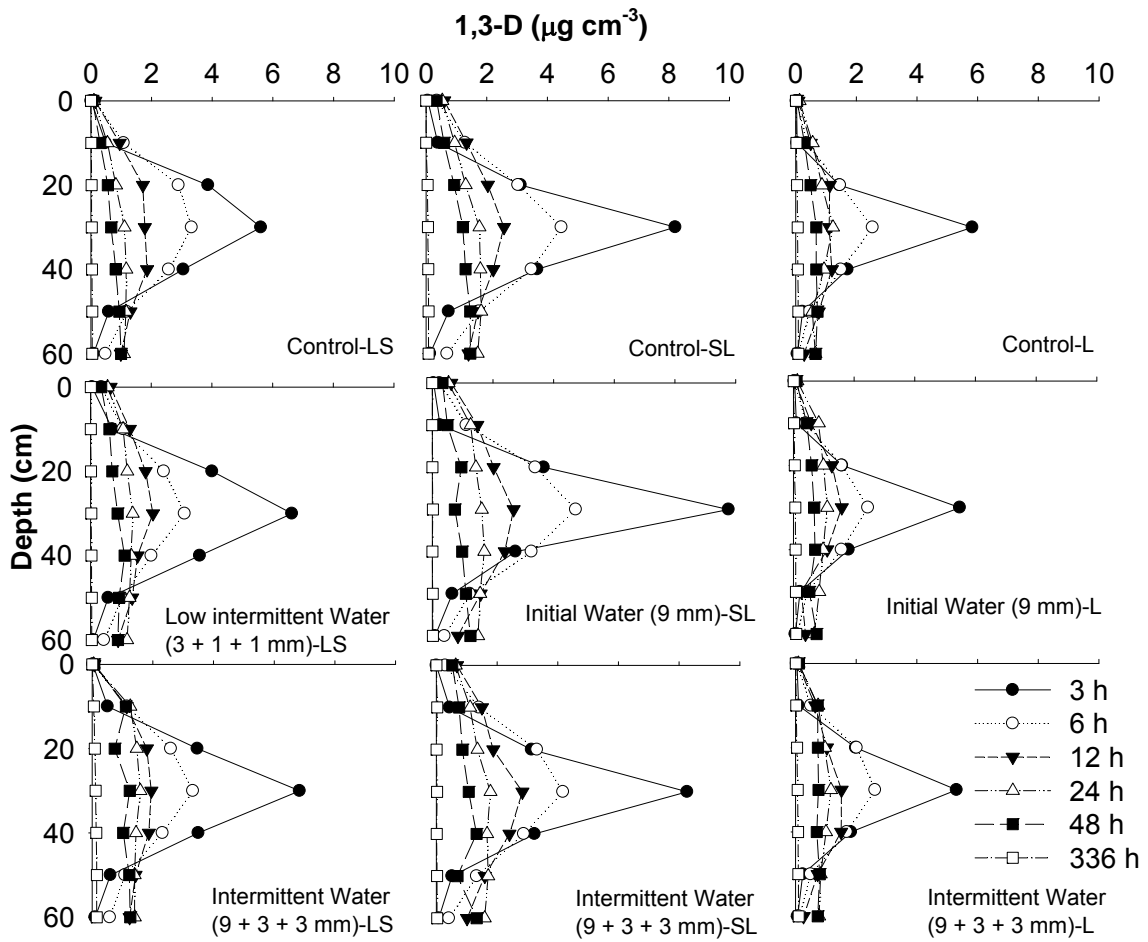


Figure 3-6. Distribution of 1,3-dichloropropene (1,3-D) in soil-gas phase under different surface treatments in soil column experiment 2. LS = Loamy Sand, SL = Sandy Loam, L = Loam.

### 3.2.5 Fate of 1,3-D

The amount of 1,3-D degraded in soil columns was calculated based on the differences between what captured (cumulative emissions, fumigant in soil gas after 14 days, and residual fumigant in solid/liquid phase) and the total amount (122 mg per column) of 1,3-D initially applied (Table 3-2). Because residual amounts were small, degradation was inversely related to the cumulative emissions from each treatment. Over two weeks, 1,3-D degraded ranging from 42-75% of the 1,3-D applied in the three soils. Higher volume water applications led to a longer retention time in the soil and resulted in greater fumigant degradation. A similar phenomenon was observed in previous column studies (Gao and Trout, 2006; soil column experiment 1). Increasing soil water content alone did not appear to affect the degradation rate of 1,3-D in a batch incubation experiment (Dungan et al., 2001). The higher degradation rate in the column experiments were likely due to the high surface soil water content that retained fumigants in soil profile for a longer reaction time. Fumigant degradation was generally greater in fine-textured soils compared to coarse-textured soils except the higher water seal in the sandy loam soil which also had relatively high degradation rates. The fate of 1,3-D in soils appears to be affected by a combination of factors including soil texture and bulk density, soil water content, and organic matter content.

### 3.2.6 Conclusion

This column experiment compared the effectiveness of water seals on emission reduction of *cis*-1,3-D from three different textured soils (loamy sand, sandy loam, and loam). The difference in soil texture and water seal applications to the soil surface greatly affected 1,3-D emissions. The highest cumulative emissions as well as earlier and higher 1,3-D peak emission fluxes were from coarse-textured loamy sand when no water was applied. Low emissions from the non-treated fine-textured soils were due to higher clay and organic matter content. When a water seal was applied, emission reduction was observed from all types of soil depending on how much water was applied. The data showed that a high-amount intermittent water treatment could result in a significantly lower emission rate for a sandy soil. Fine-textured soil (e.g., loam) generally had slower diffusion and more residual 1,3-D

compared to coarse-textured soil (e.g., loamy sand) at similar soil water conditions. Applying a sufficient amount of water to the soil surface can effectively reduce emissions for a relatively wide range of soil textures. While reducing emissions, regulating the amount of water applied to surface soils is also essential for ensuring adequate fumigant efficacy. The amount of water used in the column studies may not necessarily represent the effective amount of water needed in field conditions to reduce emissions. The column test results indicate that water seal practices can reduce fumigant emissions across different soil types.

### 3.3 Soil Column Experiment 3

#### 3.3.1 Emission Flux

The emission flux of 1,3-D and CP from different soil moisture conditions is shown in Figure 3-7. The flux increased initially following fumigant injection and then decreased across all the treatments. The peak emission flux was  $80.8 \mu\text{g m}^{-2} \text{s}^{-1}$  for *cis*-1,3-D,  $73.5 \mu\text{g m}^{-2} \text{s}^{-1}$  for *trans*-1,3-D, and  $69.1 \mu\text{g m}^{-2} \text{s}^{-1}$  for CP and occurred within 5 h following fumigant injection in the driest soil (W30). The increase of soil water content resulted in decreased peak emission fluxes and delayed their occurrence time. For example, the peak emission flux in W100 (FC) was reduced by 78-84% and delayed by 11-20 h compared to W30. In general, the emission flux of *cis*-1,3-D was higher than that of *trans*-1,3-D and CP. The peak flux of each compound and soil water content can be described in a linear equation with a negative slope:  $Y = -0.49X + 94.5$  for *cis*-1,3-D ( $R^2 = 0.94$ );  $Y = -0.46X + 80.6$  for *trans*-1,3-D ( $R^2 = 0.84$ ); and  $Y = -0.43X + 76.4$  for CP ( $R^2 = 0.86$ ), where  $Y$  is the peak flux in  $\mu\text{g m}^{-2} \text{s}^{-1}$  and  $X$  is soil water content ( $\text{g kg}^{-1}$ ). Thomas et al. (2004) also reported that higher water content delayed volatilization of 1,3-D isomers and CP from a sandy soil in a microplot experiment. Two field tests by Gao et al. (2008b, c) showed that pre-irrigation, which produced a moist soil profile with relatively higher water content near the surface than subsurface before shank fumigation, reduced the peak emission rate of 1,3-D and CP compared to the non-irrigated treatments. Gan et al. (1996) reported a column study in which increasing soil water content decreased and delayed the peak flux of MeBr due to increased retardation and tortuosity factors in fumigant gas-phase transport. Our findings show that increasing soil water content

to FC has a significant impact on peak emissions, and thus can be used to reduce the potential exposure risks to workers and by-standers. Therefore, soil water content should be considered when determining adequate buffer zones and worker safety regulations.

After the emission peak, fumigant emissions decreased the most rapidly in W30 and the rate of decrease was slowed as soil water content increased (Figure 3-7). The fumigants dissipated faster in drier soil conditions than soils with higher soil water content. At the end of the experiment, emission rates were  $< 0.01 \mu\text{g m}^{-2} \text{s}^{-1}$  for all three compounds in W30, compared to 0.40, 0.63,  $0.01 \mu\text{g m}^{-2} \text{s}^{-1}$  for *cis*-1,3-D, *trans*-1,3-D, and CP, respectively in W100.

### 3.3.2 Cumulative Emission Loss

The cumulative emission for 1,3-D isomers and CP increased rapidly and reached a plateau in the driest soil in about 2 days (Figure 3-8). As soil water content increased, the cumulative emission increased more slowly but steadily for a longer time. As a result, much larger differences in cumulative emission loss between water treatments were observed at earlier times.

The high soil water content (near FC) reduces 1,3-D and CP emissions due to the slower diffusion rate of fumigant through the moist soil and increased degradation. Jury et al. (1983) reported that fumigant diffusion through the soil liquid phase is generally 10-100 times slower than through the gas phase. Some suggest that high water content accelerates the degradation (or increased hydrolysis) of MeBr (Shinde et al., 2000) and 1,3-D (Guo et al., 2004a). Guo et al. (2004a) explained that the increased hydrolysis was because of higher partitioning of 1,3-D in the water phase. However, another study reported that 1,3-D degradation was not affected by soil moisture (Dungan et al., 2001)

The cumulative emission data from the column study can only show the comparative or relative fumigant emission information from soil water treatments. The total emission losses from this column study (Table 3-4) were much higher than usually reported in field studies.

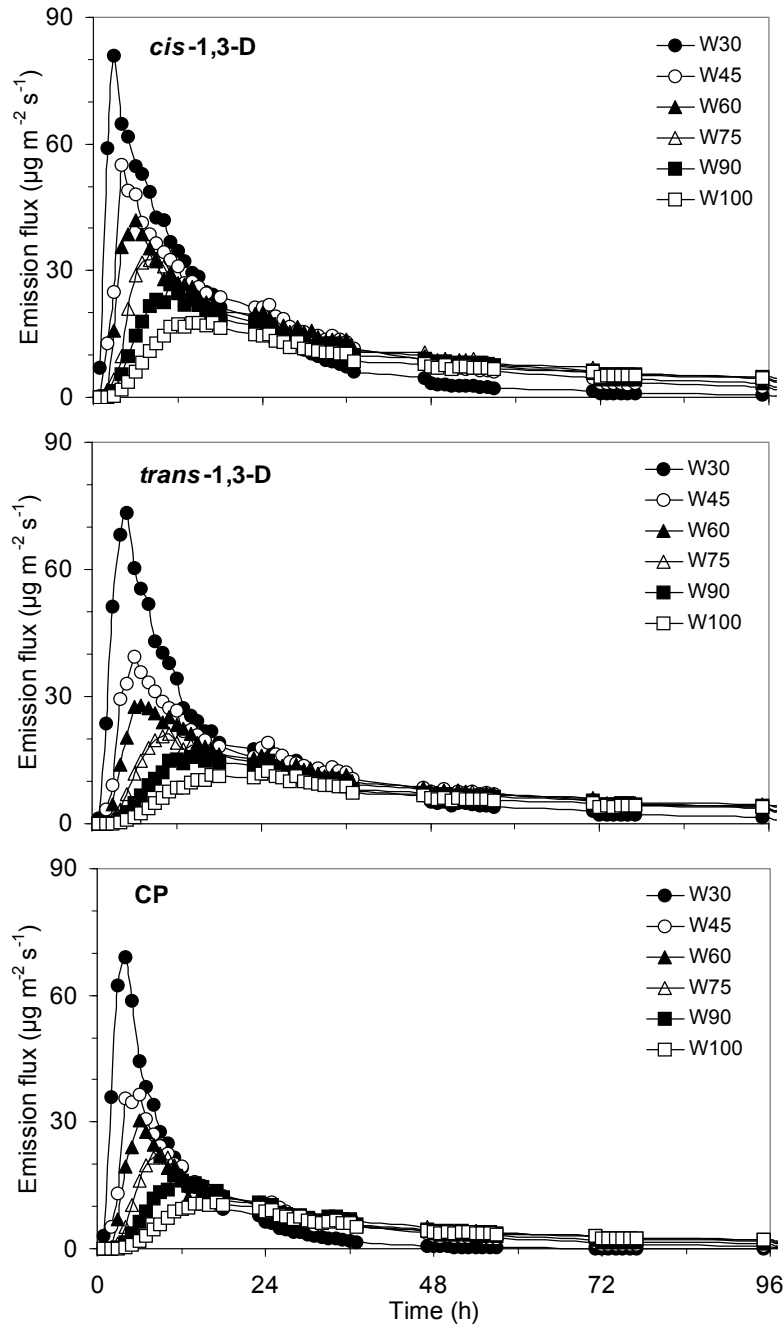


Figure 3-7. Effect of soil water content on emission flux of *cis*- and *trans*-1,3-dichloropropene (1,3-D), and chloropicrin (CP) in soil column experiment 3. Error bars are not shown for visual clarity. The averaged relative standard deviation is in a range of 4.4-11.4% for *cis*-1,3-D, 3.7-9.2% for *trans*-1,3-D, and 5.8-16.7% for CP among all the treatments.



This was due to the relatively shallow closed-bottom columns as compared to field applications which have no restrictive lower boundary. The fumigants injected into the columns can only escape upward (emission); whereas in a field, gases can move in three dimensions in the soil profile. As a consequence, the closed-bottom columns likely led to higher total emission losses compared to field conditions. It is expected that the combination of environmental and biological factors in the field could accelerate fumigant degradation and would result in larger differences in fumigant emissions between soils with different moisture conditions than what was observed from these soil columns.

### 3.3.3 Fumigants in Soil-Gas Phase

Similar distribution patterns over time were observed for *cis*-1,3-D, *trans*-1,3-D, and CP in soil-gas phase; therefore, only *cis*-1,3-D data are shown in Figure 3-9. The highest *cis*-1,3-D concentration was measured at the first sampling time (3 h) near the injection depth (10 cm) in all the treatments, and the fumigant concentration in soil gas at the depths of 0 and 20 cm were very low at that time. The lowest peak fumigant concentration was in the driest soil due to the rapid emission loss (Fig. 3-7). The fumigant concentrations were relatively uniform throughout the whole soil column by 6 h in W30, W45 and W60, 12 h in W75 and W90, and 24 h in W100 again indicating that high water content reduced the diffusion rate. After uniform distribution was reached, the fumigant concentration in soil gas-phase decreased over time in all treatments.

The disadvantage of increasing soil water content is that excess amounts of water may result in significantly reduced diffusion rates of fumigant and uniform distribution especially when fumigant injection points are widely spaced and/or deep soil treatment is required. The soil column study showed the measured fumigant concentrations in the moist soils up to FC level were consistently higher than those in the dry soil due to more retention and the slower emission rate in moist soils. Thomas et al. (2004) also reported higher 1,3-D and CP concentrations in soil gas-phase at FC as compared to dry soil during the fumigation period (except the initial few hours following fumigant injection) in a microplot.

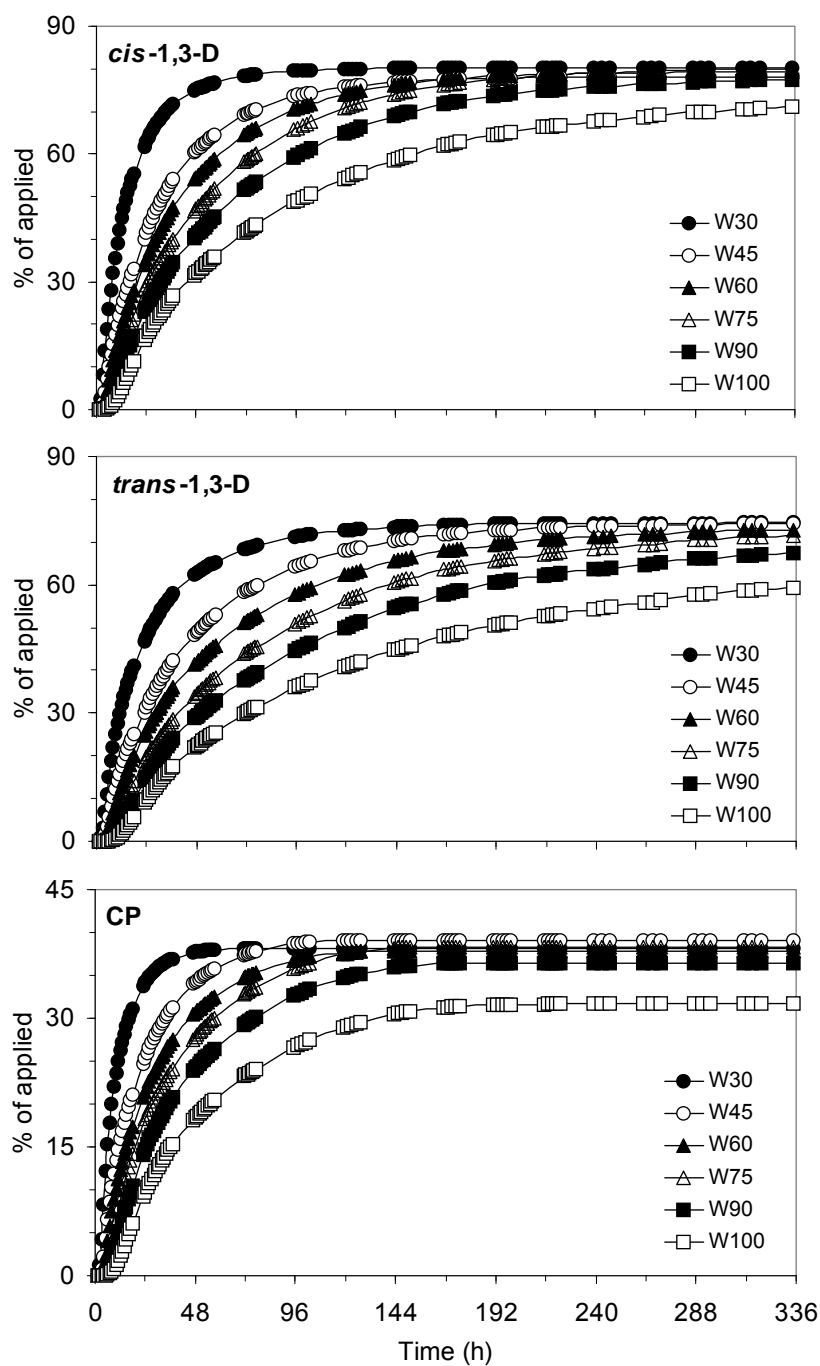


Figure 3-8. Cumulative emissions of *cis*- and *trans*-1,3-dichloropropene (1,3-D), and chloropicrin (CP) affected by soil water content (soil column experiment 3). Error bars are not shown for visual clarity. The averaged relative standard deviation is in a range of 0.8-8.1% for *cis*-1,3-D, 0.3-7.9% for *trans*-1,3-D, and 1.8-13.7% for CP among all the treatments.

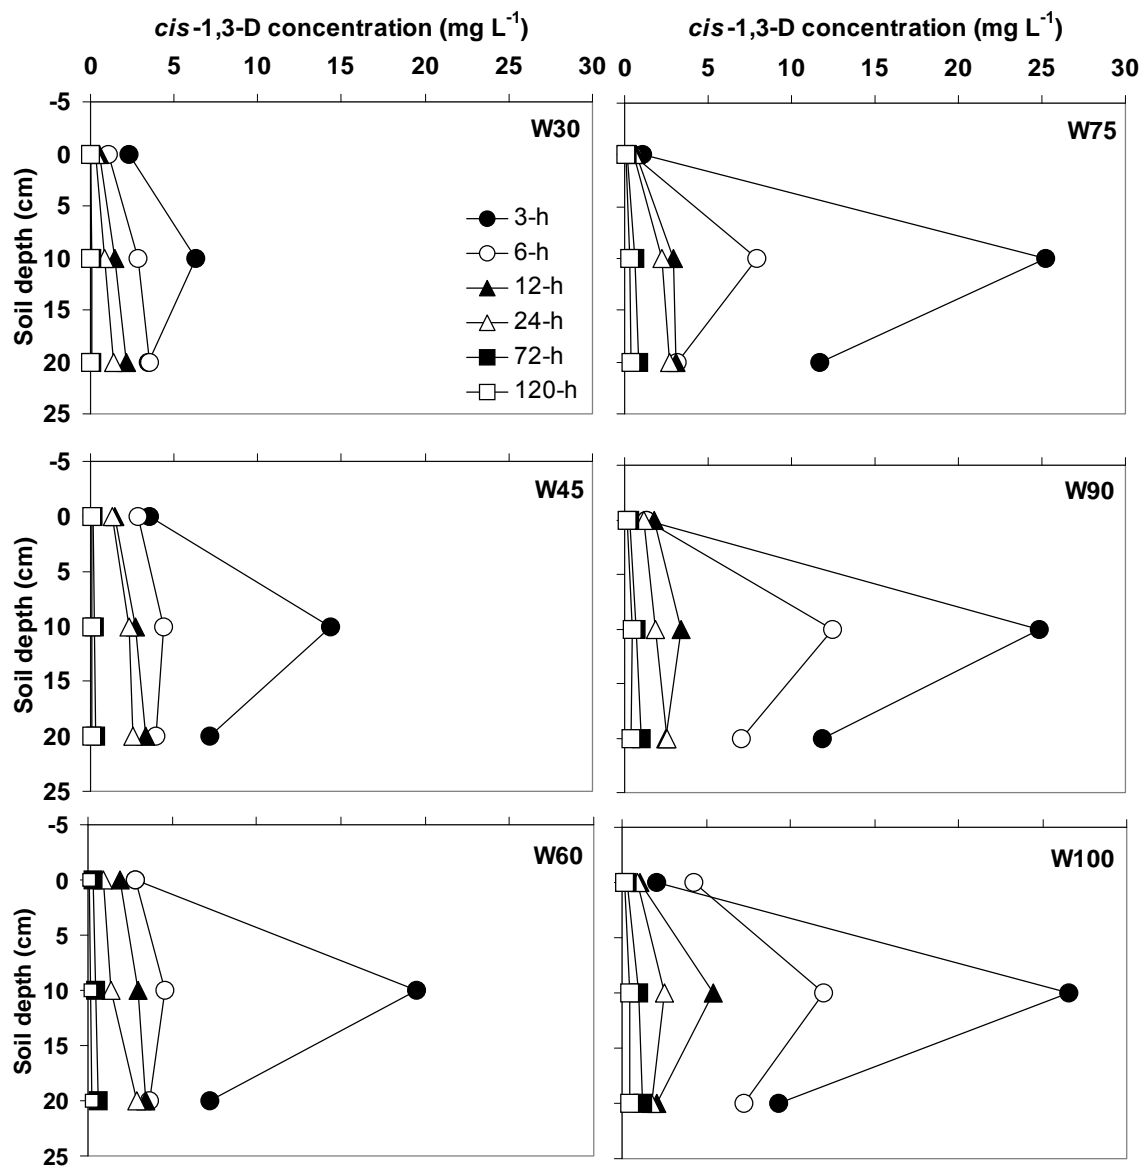


Figure 3-9. Distribution of *cis*-1,3-dichloropropene (1,3-D) in soil-gas phase at different water treatments (soil column experiment 3). Error bars are not shown for visual clarity. The averaged relative standard deviation is in a range of 7.9-28.4% for *cis*-1,3-D, 14.7-34.9% for *trans*-1,3-D, and 15.4-36.2% for CP among all the treatments.

### 3.3.4 Residual Fumigants in Soil and the Fate of Fumigants

The average concentrations of residual fumigants (in soil solid/liquid phases) in soil columns at the end of the experiment (14 d) are given in Figure 3-10. The residual fumigant concentrations were relatively uniform throughout the column in each treatment (data not shown). The wetter the soils became, the higher the residual fumigant concentrations were. The amount of residual fumigants was the highest in the W100 treatment (0.12 mg kg<sup>-1</sup> of *cis*-1,3-D, 0.32 mg kg<sup>-1</sup> of *trans*-1,3-D, and 0.01 mg kg<sup>-1</sup> of CP). In the driest soils (W30), the residual fumigant concentrations were 0.02, 0.06, and 0.002 mg kg<sup>-1</sup> for *cis*-1,3-D, *trans*-1,3-D, and CP, respectively. The results suggest again that high soil water content increases fumigant retention in soil, although the total residual fumigant was generally low, less than 2% of the applied amount. Similar results were reported by Thomas et al. (2004) who stated that residual 1,3-D and CP were higher in soils near FC than in dry soil in a sandy soil.

A mass balance was conducted to evaluate the fate of fumigants applied to the soils. The greatest fumigant degradation occurred in the W100 (28%, 39%, and 68% for *cis*-1,3-D, *trans*-1,3-D, and CP, respectively) (Table 3-4). Fumigants in the soil-gas phase were negligible, ~ 0.1% of applied for 1,3-D isomers and at trace levels for CP (data not shown). As more soil pore space was occupied by water, fumigant diffusion throughout the soil was much slower and more fumigant was retained in the soil for a longer time leading to higher degradation rates. A similar trend for MeBr degradation was reported by Gan et al. (1996). Increasing soil water content could lead to a longer residence time of fumigant, which could be beneficial for pest control; but could prolong the waiting time between fumigation and planting to prevent phytotoxicity and potentially leaching from irrigation or precipitation. The ideal scenario is to retain the fumigant in the soil long enough to achieve good efficacy and create conditions for fumigant to dissipate from soil prior to planting.

### 3.3.5 Conclusion

This column study showed that increasing soil water content up to FC prior to soil fumigation can significantly reduce emissions and delay the peak emission flux. This effect is

more promising on peak flux than cumulative emission loss; thus, it would be beneficial for reducing the acute exposure risks to fumigation workers and by-standers. The lesser effectiveness on cumulative loss reduction was partially due to the effect of the relatively shallow closed-bottom columns used in the test. It is expected that the soil moisture effect on emission reduction under field conditions would be greater.

The driest soils always lead to the greatest fumigant emissions immediately following injection. Soils with high soil water content had relatively low emissions especially following fumigant application; however, the decreased rate of emissions over time is slower compared to drier soils. Increasing soil water content can have both advantages and disadvantages in terms of emission reduction and pest control. As more soil pores are filled with water, fumigant diffusion through the soil becomes much slower and fumigants can be retained in the soil longer leading to lower emissions and higher degradation. The disadvantage of increasing soil water content is that an excess amount of water may result in significantly reduced diffusion rates of fumigant and uniform distribution especially when fumigant injection points are widely spaced and/or deep soil treatment is required. This soil column study showed the measured fumigant concentrations in the moist soils up to FC level were consistently higher than those in the dry soil due to the greater retention and slower emission rates in moist soils. The results indicate that maintaining a relatively high soil moisture level up to FC for fumigation may be important in controlling fumigant emissions and maintaining good pest control. Increasing soil water content may also potentially increase the residual fumigants in the soil that may delay the time to achieve uniform distribution throughout soil profile. Overall, achieving relatively high soil water content is one of the easiest and cheapest field management techniques that can be used in the field (e.g., through irrigation or precipitation). It is the most advantageous to maintain proper soil moisture conditions above the fumigant injection depth (similar to water seals) that retain fumigants and reduce emissions by reducing diffusion of fumigants to soil surface. The column test results should be validated by further field tests. Furthermore, the proper range of soil water content for providing the anticipated benefits in soil fumigation for different soil types are expected to vary, and that should be determined more specifically before improved suggestions can be given for fumigation label conditions.

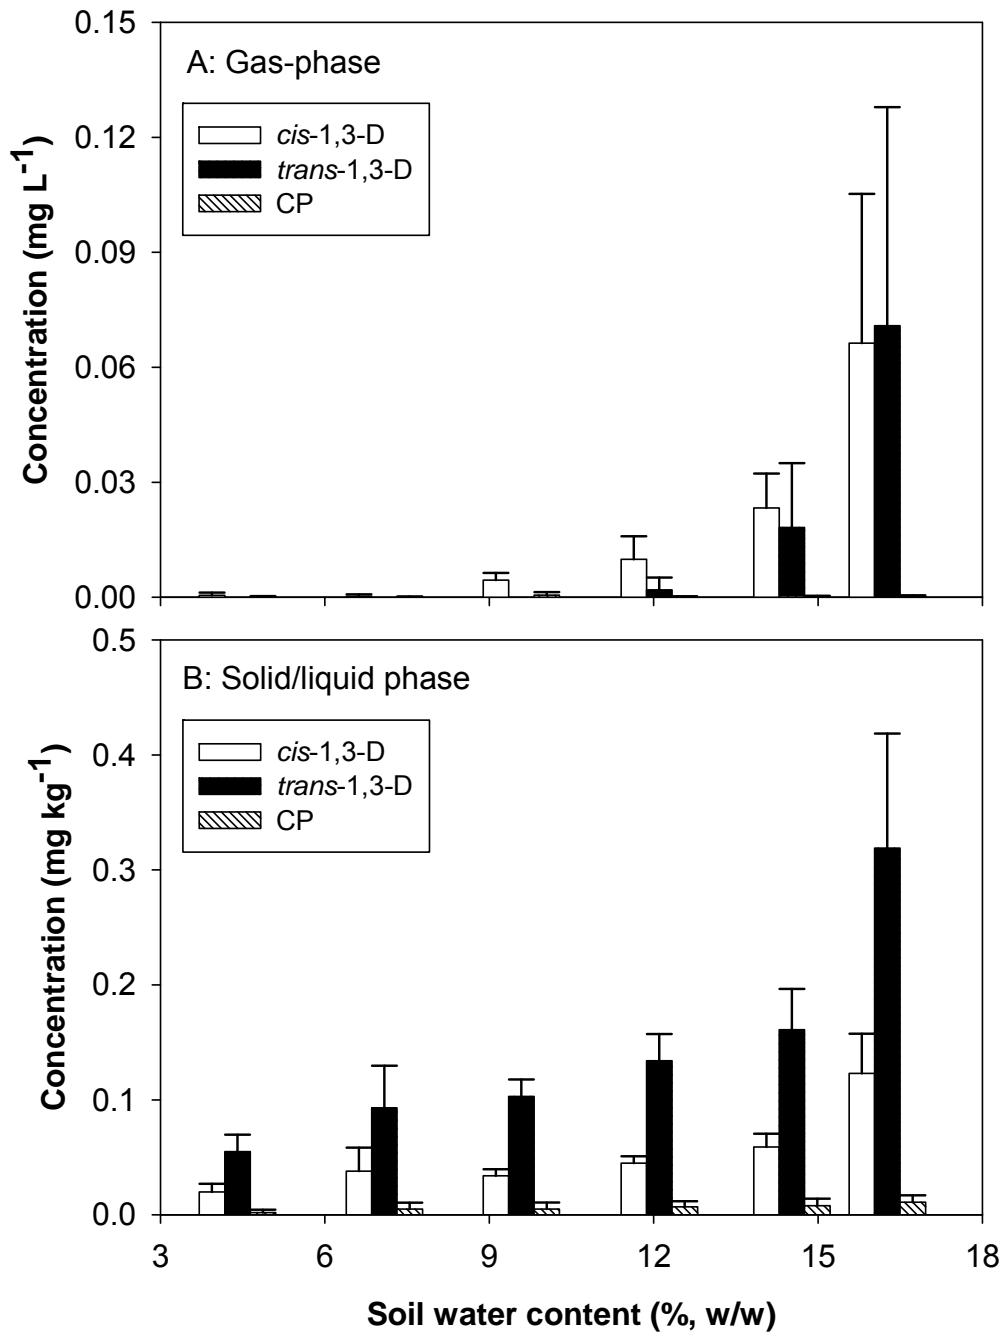


Figure 3-10. Average residual *cis*- and *trans*-1,3-dichloropropene (1,3-D), and chloropicrin (CP) concentrations in soil columns under different soil water contents (soil column experiment 3). A: in gas-phase; error bars are standard deviation (n=6; duplicate columns with 3 sampling depths each). B: in solid/liquid phase; error bars are standard deviation (n=8; duplicate columns with 4 sampling depths each).

Table 3-3. Effect of soil water content on the fate of *cis*-1,3-D, *trans*-1,3-D and CP in soil columns at the end of the experiment in Soil Column Experiment 3.

Treatment	<u>Total emission</u>			<u>Residual fumigant</u>			<u>Degradation</u>		
	<i>cis</i> - 1,3-D	<i>trans</i> - 1,3-D	CP	<i>cis</i> - 1,3-D	<i>trans</i> - 1,3-D	CP	<i>cis</i> - 1,3-D	<i>trans</i> - 1,3-D	CP
W30	80 (2)	74 (2)	38 (4)	0	0	0	20	25	62
W45	78 (2)	74 (1)	39 (1)	0	1	0	22	25	61
W60	79 (0)	73 (1)	38 (1)	0	1	0	20	27	62
W75	80 (5)	72 (4)	38 (4)	0	1	0	20	28	62
W90	78 (0)	67 (0)	36 (1)	0	1	0	22	32	64
W100	71 (2)	59 (2)	32 (3)	1	2	0	28	39	68

Values in the table are the average of two replicates as the percentage of the totally applied fumigant. Values in parentheses are standard deviations of duplicate column measurements. Degradation was calculated by the difference between the amount applied and the measured emission loss, fumigant in the gas-phase (~0.1%) and the residual values remained in the soil.

### 3.4 Field Trial 1 (Year 2005)

#### 3.4.1 Emission Flux

The emission rates of 1,3-D and CP are shown in Figure 3-11. The control (shank, dry soil) resulted in the earliest peak emission flux ( $76 \mu\text{g m}^{-2} \text{s}^{-1}$  for 1,3-D and  $53 \mu\text{g m}^{-2} \text{s}^{-1}$  for CP), followed by the HDPE tarp over dry soil with shank injection for 1,3-D (up to  $71 \mu\text{g m}^{-2} \text{s}^{-1}$ ). The HDPE tarp resulted in a much lower CP emission peak ( $19 \mu\text{g m}^{-2} \text{s}^{-1}$ ) than 1,3-D relative to the control. The emission peaks occurred at 15 h for the control and 48 h for the HDPE tarp after fumigation. This emission delay with HDPE was not found in an earlier study carried out during high summer temperatures (Gao and Trout, 2007). Higher temperatures under the HDPE tarp in the summer may have caused earlier emissions. The overall results indicate that the HDPE tarp is not effective in reducing 1,3-D emissions even under relatively cool temperature conditions, although the peak flux may be delayed. Pre-irrigation before shank-injection resulted in a much lower 1,3-D peak emission rate ( $26 \mu\text{g m}^{-2} \text{s}^{-1}$ ) than the dry soil control or HDPE tarp over dry soil. This illustrates that irrigation prior to fumigation to produce a moist soil profile can reduce fumigant emissions more effectively than the HDPE tarp. The VIF tarp over the dry soil profile resulted in relatively low but variable emission rates ( $1\text{-}26 \mu\text{g m}^{-2} \text{s}^{-1}$ ).

Fumigation through the subsurface drip-applications resulted in much lower peak emission rates ( $8\text{-}14 \mu\text{g m}^{-2} \text{s}^{-1}$  for 1,3-D, and  $2\text{-}4 \mu\text{g m}^{-2} \text{s}^{-1}$  for CP, respectively) than shank-injections. Even considering that the actual application rate of the fumigant for subsurface drip-injection was 16% lower than that for shank application, fumigant volatilization rates still appeared much lower from drip application than from shank-injections.

The emission flux of CP showed a similar trend as 1,3-D except with lower values—below  $20 \mu\text{g m}^{-2} \text{s}^{-1}$  for all treatments except the Control. The amount of CP applied was about 57% of 1,3-D on a weight basis while emission rates were generally less than 50% 1,3-D emissions. The HDPE tarp over dry soil with shank injection resulted in much lower CP emission rates than 1,3-D, indicating that HDPE is more effective in reducing CP emissions



than 1,3-D. Similar results were observed in an earlier study (Gao and Trout, 2007). Chloropicrin is slightly less volatile and has a much shorter half-life than 1,3-D in soils (Gan et al., 2000b; Dungan et al., 2001; Ajwa, 2003). These contribute to lower emissions of CP than 1,3-D under the same conditions.

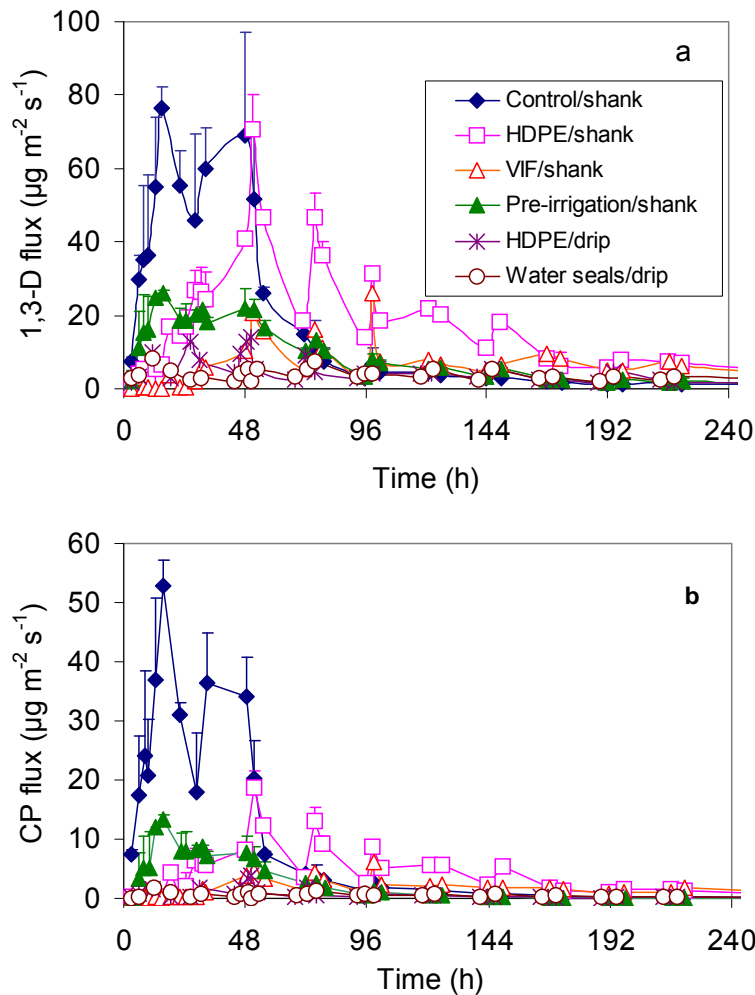


Figure 3-11. Effects of application methods and surface seal treatments on emission flux of (a) 1,3-dichloropropene (1,3-D) and (b) chloropicrin (CP) from Telone C35 (shank-injection) and InLine (drip-irrigation) applications in the 2005 field trial. Error bars are standard deviations of duplicate measurements. HDPE, high density polyethylene; VIF, virtually impermeable film.

### 3.4.2 Cumulative Emission Loss

Cumulative emission losses of 1,3-D and CP, and the total losses as a percentage of applied over a 2-wk monitoring period are shown in Figure 3-12 and Table 3-4, respectively. As with emission rates, the control resulted in the earliest and highest 1,3-D emission losses in the first week after which emission loss from HDPE tarped treatments exceeded the control. Warmer soil temperatures under the tarp as compared to the bare soil may contribute to this pattern. Total measured losses of 1,3-D were 36% of applied for the control with a large cumulative standard deviation (7.1%) and 43% (with a standard deviation of 3%) for the HDPE tarp. Total emission losses from the pre-irrigated and VIF tarp over shank-injection applications (19%) were about half of those from the control and the HDPE tarp. Emission losses for the VIF tarp over shank application were lower than the pre-irrigation treatment initially but increased steadily until the end of the monitoring period. The VIF tarp appeared to retain fumigants under the tarp but the warm temperatures under the tarp (see below) might have caused emission increases at a later time. Subsurface drip applications under the HDPE tarp and micro-sprinkler water applications before and after drip application resulted in the lowest and similar emission losses (12–13% for 1,3-D and 2–3% for CP, respectively). These similar results indicate that small amounts of surface water applications before and after fumigation through subsurface drip irrigation can reduce emissions as effectively as the HDPE tarp. If micro-sprinkler systems are available in orchards, using the systems to apply water prior to or after drip-fumigation will provide equivalent emission reduction to plastic tarps and will reduce total fumigation cost.

The total emission loss of CP follows a similar pattern as 1,3-D except that the HDPE tarp reduced CP emissions more effectively than 1,3-D. Total emission loss of CP under HDPE was about half that of the control. In addition, although the differences between 1,3-D and CP emission losses for the control were not appreciable, total percent losses of CP in all other surface treatments are generally lower than 1,3-D. This has been previously observed (e.g., Gao and Trout, 2007), i.e., surface treatments, either with tarps or water seals, reduce CP emissions more effectively than 1,3-D. The lower CP emissions are again due to CP's lower volatility and faster degradation than 1,3-D in soils.

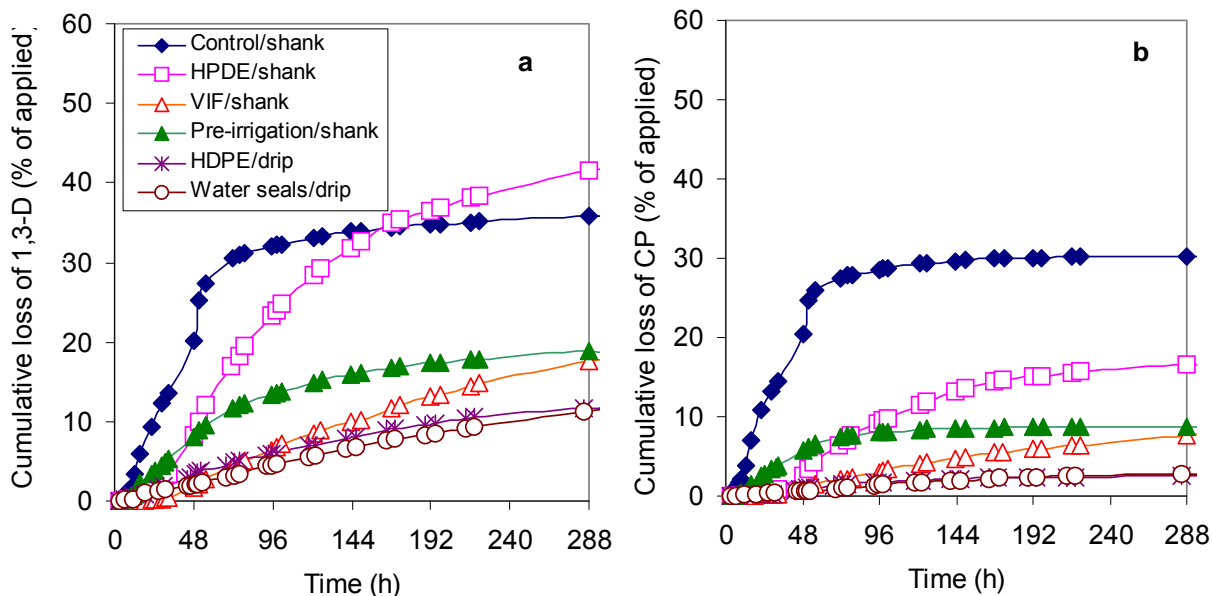


Figure 3-12. Cumulative emission of (a) 1,3-dichloropropene (1,3-D) and (b) chloropicrin (CP) from surface seal treatments in the 2005 field trial. Plotted data are averages of duplicate measurements with cumulative standard deviations listed in Table 3-4. HDPE, high density polyethylene; VIF, virtually impermeable film.

Emission results from this orchard field trial confirmed the ineffectiveness of the HDPE tarp on 1,3-D emission reduction. This supports the current Telone label that does not require a tarp but does require soil moisture above the injection point. Irrigation with enough water to produce a moist surface soil profile to a 25 cm depth prior to soil fumigation can effectively reduce 1,3-D and CP peak emission flux and total emission losses by 50% for 1,3-D and 70% for CP relative to the control. The field data validated some of the findings in soil column experiments reported above.

Drip-applications resulted in high soil water content (see below) and greatly reduced emissions by 70% for 1,3-D and 90% for CP, respectively, in comparison with the dry-soil control. Pre- and post-fumigation surface water applications resulted in the same low

emissions from subsurface drip-applied fumigants as HDPE. The HDPE tarp over moist soils traps moisture under the tarp and prevents the surface from drying. High soil water content created by pre-fumigation surface water application greatly reduces soil water suction and thus capillary rise of water with fumigants from the subsurface drip tape to soil surface. Post-fumigation replenishment of surface water application further delays any capillary rise to the soil surface of water with fumigant. The current InLine label requires use of HDPE tarps for drip application. The field data indicate that the tarp is not necessary if the fumigant is applied 20 cm below the surface and light pre- and post-fumigation sprinkler irrigation is used. Orchard growers with micro-irrigation systems can use their irrigation delivery systems (pump, filters, and pipelines) to deliver water to micro-sprinklers to apply water to the soil surface, or to subsurface drip tape that is installed to apply fumigants.

Fumigation in this orchard replant field trial was applied in strips covering about half of the field areas. This automatically reduces total fumigant input by 50%. Fumigating target areas where trees would be planted can be an effective strategy to reduce emissions. The total emission losses of fumigants would be reduced in proportion to the decrease of fumigated areas. For example, in this field trial, a further 50% emission reduction was expected in the strip treatment compared to the fumigation of an entire field.

#### 3.4.3 Fumigants in Soil-Gas Phase

The distribution of 1,3-D in the soil-gas phase is shown in Figure 3-13. Similar distribution patterns were followed by CP with lower concentrations and faster dissipation (data not shown). The application ratio of CP:1,3-D was 1:1.7. The initial ratio of CP:1,3-D in the soil gas near the surface was 1:1.4 and this ratio decreased with time and depth.

At the shank-injection line or drip tapes (Location *a*), the highest concentration of gaseous fumigants was found at 6 h for shank-injection and at 33 h for drip-application. At the locations between shank-injection lines or drip tapes (Location *b*), the highest concentration was found at 24 h for shank-injections and 33 h for drip applications. Fumigant concentrations at Location *a* were generally higher than Location *b* but this difference

became very small at 48 h and thereafter. This reflects the time required for uniform distribution of fumigants throughout the soil.

The HDPE tarp over shank injection had similar fumigant concentrations as the control. The VIF tarp resulted in relatively higher fumigant concentrations in the soil-gas phase than the other treatments especially between 48-120 h. A single 3.7 m wide plastic sheet was used to cover the treatment area and some fumigant might have dissipated under the tarp edges. Fumigant distribution in the soil gas for the pre-irrigation over shank-injection treatment was not measured in this field trial. Measurements in a previous field trial indicated no differences in fumigant concentrations in this soil between the control and pre-irrigated soil plus the HDPE tarp (Gao and Trout, 2007) as well as between the control and pre-irrigated soil profile (unpublished data) when 56 mm of water was sprinkler-applied 48 h prior to fumigation in this soil.

Throughout the soil profile, fumigant concentrations in the soil air in drip-applications were generally lower than shank-injection treatments, but decreased more slowly. Towards the end of monitoring, considerably higher 1,3-D concentrations in the soil profile were measured in drip-application treatments (ave. 1.3 – 1.5 mg L<sup>-1</sup>) in comparison to shank-application treatments (ave. 0.2 – 0.7 mg L<sup>-1</sup>). This was supported by the data obtained from soil column experiment 3 where high soil moisture levels were shown to retain fumigants longer by reducing diffusion rates and increasing partitioning to the liquid phase. Thomas et al. (2003) also showed that both 1,3-D diffusion and emissions in a sandy soil were very high in air-dried soil but greatly reduced by high soil-water content. For fine-textured soils, the effect of water content on fumigant diffusion was greatest when soils had water contents that resulted in soil water tension below 50 kPa at a 30 cm depth (McKenry and Thomason, 1974). With drip-application and surface water application, soil gas fumigant concentrations near the soil surface were very low, which contributed to the low emissions. Drip-application is designed to deliver the fumigant with irrigation water movement or infiltration. Poor distribution may affect pest control and lower fumigant concentration in surface and may affect weed control, which, however, is not a primary concern for orchard replanting.

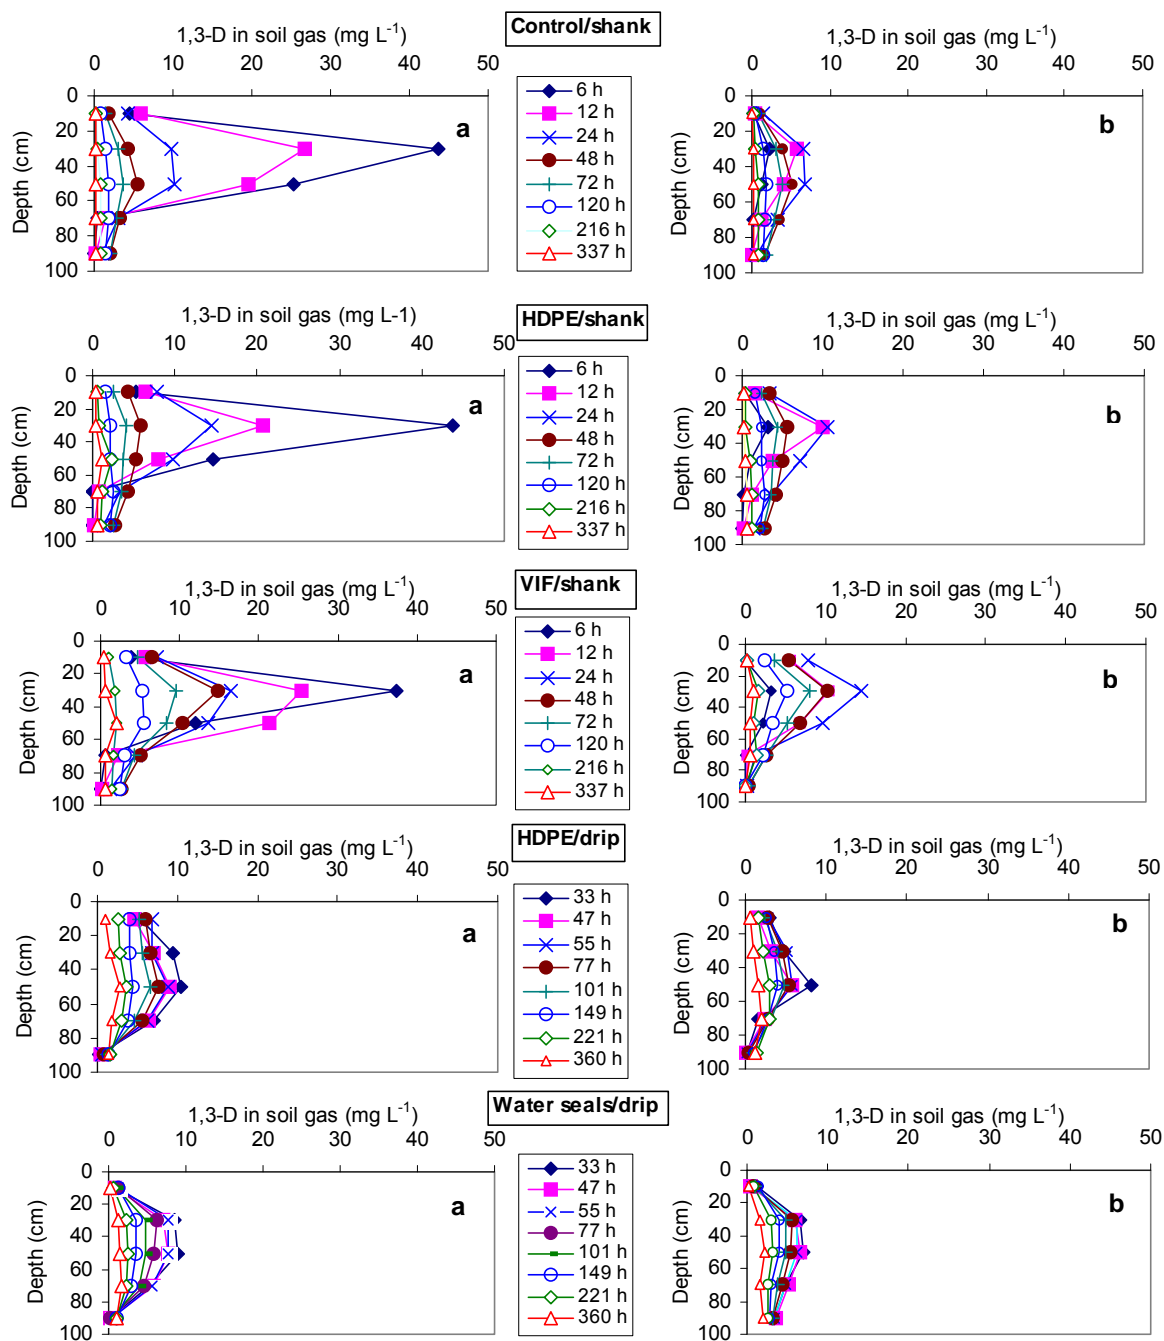


Figure 3-13. Distribution of 1,3-dichloropropene (1,3-D) in the soil-gas phase after fumigation under various surface treatments in the 2005 field trial. Sampling was located (a) adjacent to fumigant injection line, or (b) between injection lines. HDPE, high density polyethylene; VIF, virtually impermeable film.

### 3.4.4 Residual Fumigant in Soil

Residual 1,3-D and CP in soil at the end of the field trial are shown in Figure 3-14. The data show that fumigants remained in the soil mostly in the solid and liquid phase. Similar patterns were observed for 1,3-D and CP except for the lower concentrations of CP than 1,3-D. The results indicate that although they exist in low concentrations, fumigants were detectable two weeks after fumigant application. The highest concentrations were from soils under the VIF tarp over shank-injection, followed by the HDPE tarp over shank-injection. This indicates that VIF did retain higher fumigant concentrations in the soil although this was not indicated by the soil gas measurements. Although drip application seemed to maintain higher fumigant concentrations in the gas phase than shank application towards the end of the trial, residual fumigant concentrations were relatively high in some irrigation treatments; but this is not shown in the drip plus water seal treatment.

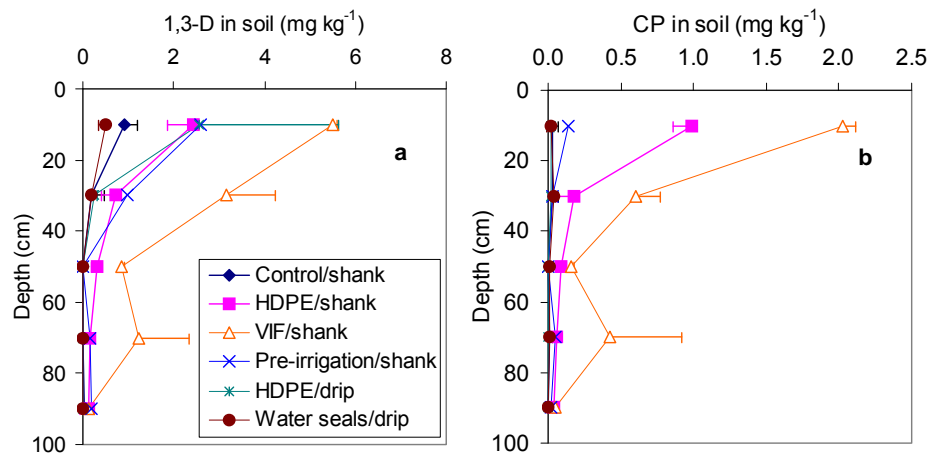


Figure 3-14. Residual fumigants (a) 1,3-dichloropropene (1,3-D) and (b) chloropicrin (CP) extracted from soil samples collected 14 d after fumigation in the 2005 field trial. Horizontal bars are the standard deviation of duplicate measurements. HDPE, high density polyethylene; VIF, virtually impermeable film.

**Table 3-4.** Peak flux and total emission loss of 1,3-dichloropropene (1,3-D) and chloropicrin (CP) measured over 2 weeks after fumigation in the 2005 field trial. Values in parenthesis are standard deviations of duplicate measurements.

Treatment	Maximum Emission flux ( $\mu\text{g m}^2 \text{s}^{-1}$ )		Total Emissions (% of applied)	
	1,3-D	CP	1,3-D	CP
Control/shank	76.3 (5.9)	52.7 (4.5)	36 (7)	30 (3)
HDPE/shank	70.6 (9.6)	18.8 (2.8)	43 (<1)	17 (0)
VIF/shank	26.0 (18.2)	6.2 (4.4)	19 (1)	8 (<1)
Pre-irrigation/shank	14.2 (1.0)	13.2 (0.8)	19 (1)	9 (0)
HDPE/drip	14.2 (1.0)	3.8 (0.2)	12 (2)	2 (<1)
Water seals/drip	8.3 (4.0)	1.7 (1.3)	13 (5)	3 (2)

HDPE, high density polyethylene; VIF, virtually impermeable film.

#### 3.4.5 Soil Water Content, Temperature, and Nematode Response

Irrigation alters soil water content which directly affects fumigant emissions and distribution in soil. The pre-irrigated soil treatment applied about 40 mm of water that was intended to wet the surface 25 cm of soil to field capacity 4 days prior to fumigation. One hundred fifty millimeters of water was added to the soil profile during drip-application in order to move fumigants with the water to at least the 1 m depth. The amount and timing of water application may greatly affect emissions. After two weeks of redistribution and surface evaporation, the soil water content from all the treatments were significantly below the field capacity of  $0.26 \text{ cm}^3 \text{ cm}^{-3}$  (Figure 3-15). With a total porosity of  $0.45 \text{ cm}^3 \text{ cm}^{-3}$ , air volume in the soil would be about  $0.20 \text{ cm}^3 \text{ cm}^{-3}$  at field capacity. Initial soil water content distribution throughout the profile would be more concentrated near the soil surface, i.e., lower air volume near the soil surface immediately after water applications. The air volume in the surface soil should have played an important role in fumigant emissions.



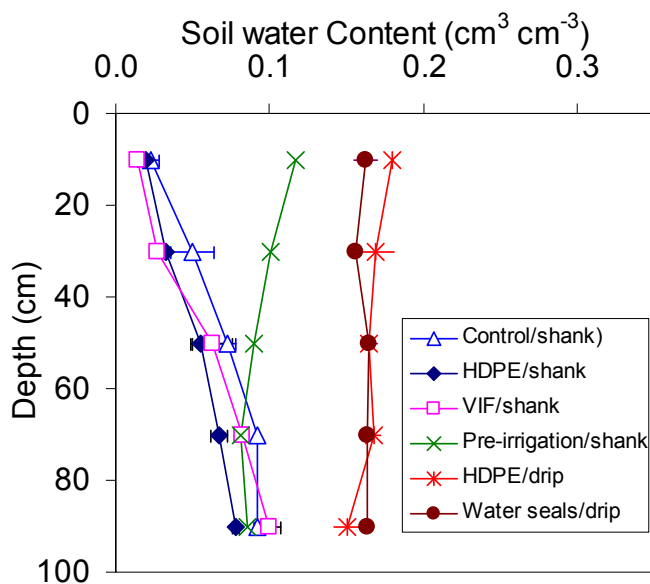


Figure 3-15. Soil water content measured two weeks after fumigation under various surface treatments in the 2005 field trial. Horizontal bars are the standard deviation of duplicate measurements. HDPE, high density polyethylene; VIF, virtually impermeable film.

Water added to the pre-irrigated soil to increase the soil water content to the 25 cm depth to field capacity, had redistributed throughout the 50 cm soil depth after 2 wks. This treatment reduced emissions of 1,3-D by about 50% compared to the control with a dry-soil profile. The Telone label recommends a moist soil condition in at least a 25 cm soil layer above the fumigant injection depth as determined by the “feel method”, so this treatment would have met the label requirements at the time of fumigation. The large amount of water used for drip-application treatments resulted in significant increases of soil water content to the 1.5 m depth. About 120 mm of water was stored in the 1 m profile, and additional soil sampling measured similar soil water content to the 1.5 m depth. The high soil water content also resulted in lower fumigant concentrations measured in the soil-gas phase and the reduced gas-phase fumigant concentration may be a result from more partitioning into the liquid phase as the water content increased. Fumigant concentrations in the gas phase and liquid phase are often assumed at equilibrium, obeying the Henry’s Law Constant, although there was not enough information to verify how well this equilibrium is maintained under dynamic field conditions.

There were large differences in soil temperature among the treatments, which was measured 10 cm below the soil surface on Nov. 4 (Fig. 3-16). The HDPE over drip-irrigation yielded the highest soil temperature (25°C), which was 8°C higher than the untarped moist soil or the lowest soil temperature. The temperature followed this trend: HDPE/drip > tarp (HDPE or VIF)/shank > control > pre-irrigated soil > water applications/drip. The warmer temperatures under the tarp with shank applications may have contributed to the higher emissions observed from the HDPE and VIF tarps as well as the large emission variation from the VIF tarp at later monitoring times.

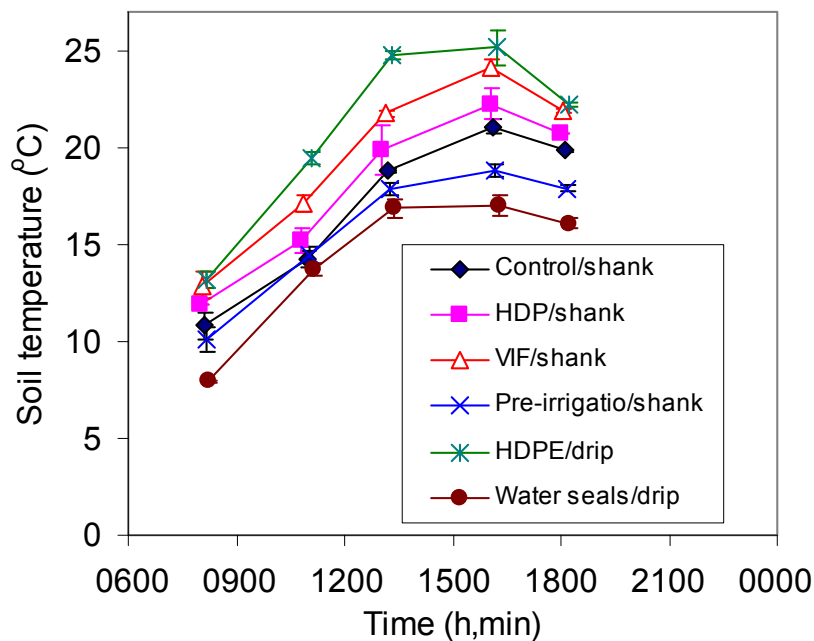


Figure 3-16. One-day soil temperature measurements at a 10 cm depth during the fumigant emission monitoring period in the 2005 field trial. Horizontal bars are the standard deviation of duplicate measurements. HDPE, high density polyethylene; VIF, virtually impermeable film.

Recovery of bagged samples of citrus nematode infested soil buried at depths of 30, 60, and 90 cm showed that in the untreated plots, an average of 4,000 live citrus nematodes per bag were recovered. However, no live nematodes were found in bags recovered from any of the fumigation treatments. This indicates that all the fumigation treatments provided good control of the citrus nematodes throughout the soil profile regardless of fumigation and surface seal treatments and the observed variations in gas-phase fumigant concentrations. However, no efficacy evaluation was made in surface soils (0-30 cm depth) where variations in gas-phase concentrations were the highest. Wang et al. (2006) studied distribution of MITC and CP in soil gas phase following fumigation with dazomet, metam-sodium, and CP under tarp and water seal covers. They observed significantly higher MITC and CP concentrations under the tarp than with water seals and implied that the much lower fumigant concentrations in the water-sealed plots, especially near the soil surface, were unlikely to provide sufficient exposure time to achieve desired pesticidal efficacy. The effect of high water content on soil pest control from irrigation treatments to reduce fumigant emissions remains less well understood.

#### 3.4.6 Conclusion

This field trial investigated the effects of fumigation methods (shank-injection vs. subsurface drip-application) and selected surface treatments (irrigation and plastic tarps) on the emission reduction of 1,3-D and CP from shank-injection of Telone<sup>®</sup> C35 and drip-application of InLine<sup>®</sup>. Treatments included control (no water or soil surface treatment), standard HDPE tarp, VIF tarp, and pre-irrigation all over the shank-injection; and HDPE tarp and irrigation with micro-sprinklers (water seals) before and after fumigation over the subsurface drip-application. The highest 1,3-D and CP emission losses over a 2-wk monitoring period were from the control (36% 1,3-D and 30% CP) and HDPE tarp (43% 1,3-D and 17% CP) over shank-injection. The pre-irrigation four days prior to fumigation and VIF tarp over shank-injection had similar total emission losses (19% 1,3-D, and 8-9% CP). The HDPE tarp and irrigations over the subsurface drip-application treatments resulted in similar and the lowest emission losses (12-13% 1,3-D, and 2-3% CP). Lower gaseous fumigant concentrations were observed with drip-application initially but the concentrations were higher at later times than

the shank-injection treatments, which again illustrate that water increased fumigant retention in soil. All fumigation treatments killed 100% of citrus nematodes in bags buried from 30 to 90 cm depth below soil surface. Irrigation treatments (pre-irrigation and drip-application) were proven to effectively reduce emissions of 1,3-D and CP under the field conditions. Using water costs much less compared to tarping treatments and no material disposal is needed. These treatments are feasible for orchards especially those with portable sprinklers or microspray irrigation systems available.

### **3.5 Field Trial 2 (Year 2006)**

#### **3.5.1 Emission Flux**

Figure 3-17 shows the emission flux for both 1,3-D and CP from six surface treatments. The control gave the earliest and longest duration (24 hr) peak emissions ( $25 \mu\text{g m}^{-2} \text{s}^{-1}$  for 1,3-D and  $15 \mu\text{g m}^{-2} \text{s}^{-1}$  for CP). The 1,3-D and CP peak emission flux in this experiment, however, were much lower than in previous field tests conducted on similar soils with lower soil water content (Gao and Trout, 2007; the 2005 field trial reported above). In a field trial conducted in the summer (max. daily air temperature: 37-41°C), the measured peak emission rate was  $75 \mu\text{g m}^{-2} \text{s}^{-1}$  for 1,3-D from a control with a soil water content of 3% for the top 30 cm soil (Gao and Trout, 2007). In the 2005 field trial conducted during a period of lower temperatures (max. daily air temperature: 13-27°C), a control with similar dry surface soil (water content: ~3%) gave a similar peak emission of  $76 \mu\text{g m}^{-2} \text{s}^{-1}$  for 1,3-D and  $53 \mu\text{g m}^{-2} \text{s}^{-1}$  for CP (the 2005 field trial described above). In the current field trial (max. daily temperature: 20-30°C), the field was more moist than the two previous trials with an average soil water content of 8% (30% of FC) for the top 30 cm soil. This difference in soil water content can be attributed to the lower emissions in the 2006 trial indicating again the important influence of soil moisture on fumigant peak emission flux.

The amendment of manure plus HDPE tarp gave an unexpectedly higher 1,3-D peak emission flux than the control (Figure 3-17) during the daytime, possibly due to higher daytime soil temperatures under the tarp than the untarped soils (Figure 3-18). The high

temperatures reduce the affinity of the fumigant for organic materials. It is also possible that since the composted manure was not incorporated into the soil it was unable to react effectively with fumigants. Similar results were observed from a soil column test in which composted manure spread over the soil surface gave much higher 1,3-D emissions than when incorporated into surface soil (unpublished data from soil column experiment 1). These results indicate that incorporation of organics into surface soils may be necessary to reduce emissions.

The KTS plus HDPE tarp greatly reduced emission rates especially for CP. For 1,3-D, both the KTS + HDPE tarp and the pre-irrigation treatments resulted in similar low emission rates. The post-fumigation intermittent water seals resulted in low emissions for the first 48 hours only and emission rates at later times (48-192 h) were as high as the control or the manure amendment treatment. When KTS was applied with water seals (intermittent KTS application treatment), emission rates were low for the first four days for 1,3-D and throughout the whole experimental period for CP. This trial shows that KTS is very effective in reducing emission rates, especially for CP.

The KTS appears much more efficient than manure in reducing fumigant emissions. KTS reacts rapidly with halogenated fumigants to form non-volatile compounds (Gan et al., 1998a). Manure degrades fumigants both biologically, by enhancing microbial activity, and chemically (Dungan et al., 2001, 2003; Gan et al., 1998b) in a much less rapid process and may also involve some reversible sorption processes as indicated by Kim et al. (2003).

Fumigant emission rates showed a greater diurnal pattern in the manure plus HDPE tarp treatment compared to others as the tarp increased soil temperature more compared to bare soils (Figure 3-18). Partitioning of fumigants into the soil gas phase and fumigant desorption from the soil solid/liquid phases increases with temperature. More importantly, the tarp permeability increases with temperature, which results in increased emissions (Papiernik and Yates, 2002). The unincorporated composted manure materials may be unable to react with fumigants effectively. All these factors may have resulted in the higher emission rates in the manure + HDPE tarped treatment, especially during the daytime. Most studies have shown

that incorporation of organic materials effectively reduced fumigant emissions when the organics were incorporated into soil or when studies were conducted in soils with high organic matter (e.g. Dungan et al., 2001, 2005; Ashworth and Yates, 2007; Soil column Experiment 1). Kim et al. (2003) reported increased adsorption of 1,3-D with soil organic matter. Most previous studies used much higher organic application rates than this study, up to 5% (w/w, or equivalent to 60 Mg ha<sup>-1</sup>). The lower amount of manure used in this study may have also contributed to the lack of reduction in emissions. Furthermore, most studies showing the effectiveness of emissions reduction used much lower fumigant application rates than in this study. For example, a large-scale field trial reporting OM effectiveness in reducing emissions had an application rate of 133 kg ha<sup>-1</sup> Telone II (36% of the maximum allowable in CA) (Yates et al., J. Environ. Qual., in press). Dungan et al. (2005) used a similarly low application rate of 130.6 kg ha<sup>-1</sup> of InLine (containing 77 kg ha<sup>-1</sup> of 1,3-D) for drip-application when application of different compost materials were shown to be effective in controlling emissions. The current field trial did not show that manure was effective in reducing emissions when the fumigation rate was several times of those reported effective. These suggest that the amount of materials (fumigant and OM) used, and the interaction kinetics between fumigants and organic materials applied may have been playing a large role in determining the effectiveness of OM materials on emission control. Other possible ways to enhance the effects of OM so as to reduce emissions may include applying water or soil preparations, etc. There is still work remaining to clarify when and under what conditions OM amendment should be used to guarantee emission reduction from soil fumigation.

The effect of organic matter on phase partitioning of 1,3-D isomers was studied in detail by Kim et al. (2003). At 20°C, the partitioning between soil and water were described by  $K_f$  (Freundlich adsorption coefficient) and ranged from 0.47 to 0.60 for *cis*-1,3-D and 0.39 to 0.45 for *trans*-1,3-D, respectively for soils with no amendments. These values (less than 1) implied that 1,3-D was very weakly adsorbed on soils. However, for a muck soil with much higher soil organic matter content and manure compost, the  $K_f$  values increased to 8.55 for *cis*-1,3-D and 6.96 for *trans*-1,3-D, respectively. These results indicate the important role of organic matter in enhancing fumigant adsorption. Furthermore, in their study, a soil in which organic matter was removed using H<sub>2</sub>O<sub>2</sub>-oxidation showed about a 50% reduction in

fumigant adsorption. Stronger hysteresis in fumigant desorption was also observed for soils with higher organic matter content. The incorporation of fumigants into the organic phase was also reported by Xu et al. (2003) who found that incorporation of 1,3-D into soil humic substances followed the order of fulvic acids >> humin > humic acids. Although the affinity of fumigants to organic matter is much higher than to soils, most mineral agricultural soils have low organic matter content. For effective emission reduction, amendments with high amounts of organic materials are necessary.

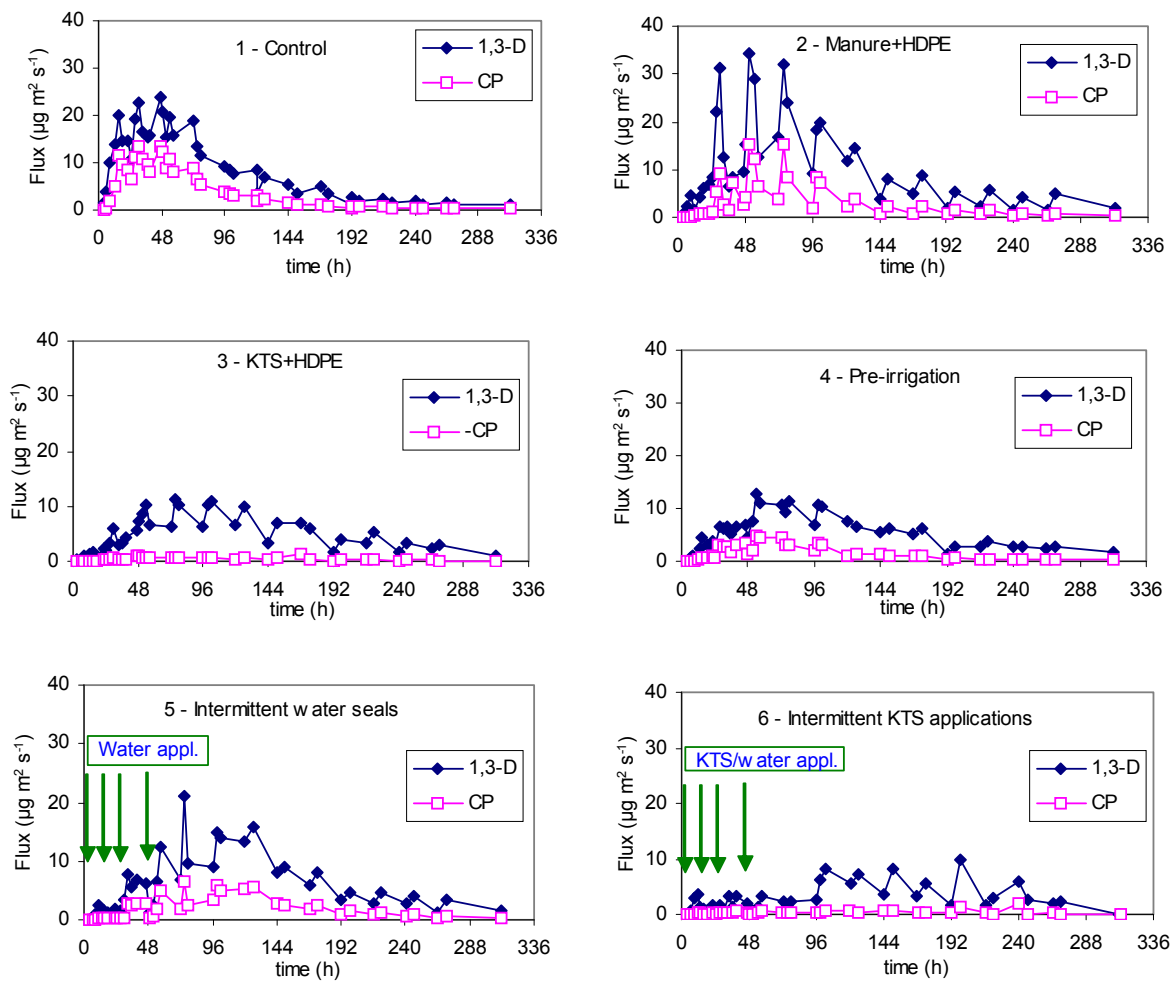


Figure 3-17. Effects of surface seals and soil treatments on the emission flux of 1,3-dichloropropene (1,3-D) and chloropicrin (CP) from shank-injection of Telone C35 in the 2006 field trial. Plotted are averages of three replicates. Manure, composted steer manure; HDPE, high density polyethylene; KTS, potassium thiosulfate.

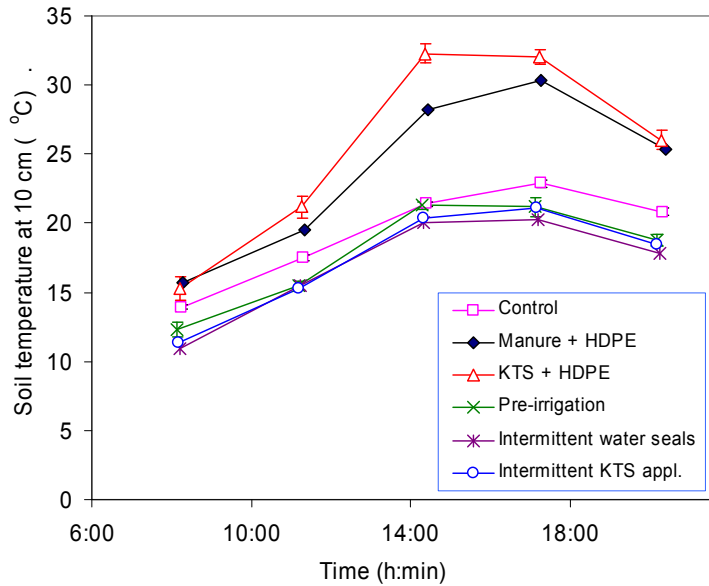


Figure 3-18. One-day soil temperature measurements at the 10 cm soil depth during the fumigant emission monitoring period in the 2006 field trial. Vertical bars are the standard deviations of the mean (n=3). Manure, composted steer manure; HDPE, high density polyethylene; KTS, potassium thiosulfate.

### 3.5.2 Cumulative Emission Loss

The cumulative and total emission losses of 1,3-D and CP as a percent of applied fumigant over the monitoring period (2-wk) are shown in Figure 3-19 and Table 3-5. The control had the earliest and highest 1,3-D emission losses during the initial days, but was exceeded by the Manure + HDPE treatment after 96 hr. The other treatments had lower cumulative emission losses of 1,3-D than the control throughout the experimental period and followed the order of Control = Intermittent water seal > Pre-irrigation  $\approx$  KTS+HDPE > Intermittent KTS application. All the surface soil treatments resulted in lower cumulative emissions of CP than the control following the order of Control > Manure + HDPE > Intermittent water seal > Pre-irrigation > KTS+HDPE = Intermittent KTS application.



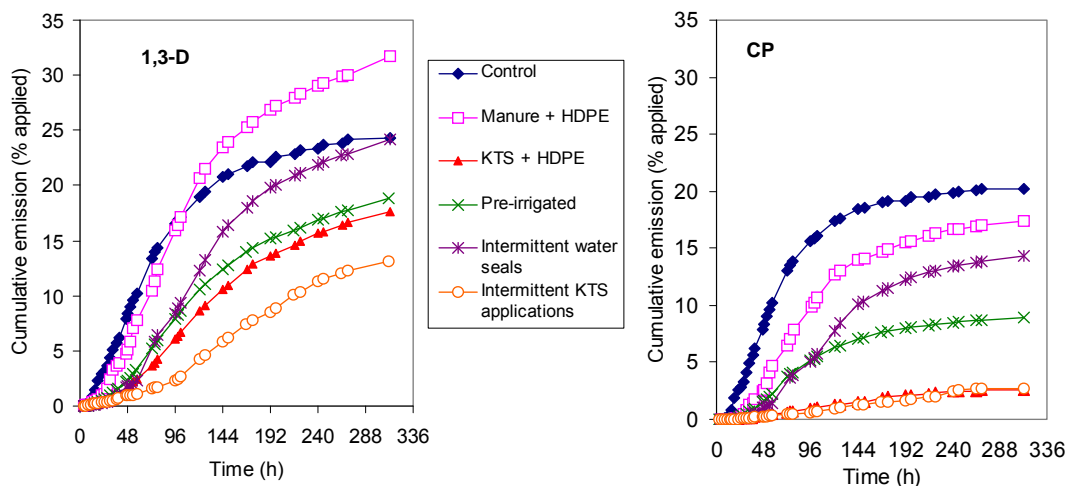


Figure 3-19. Cumulative emission losses of 1,3-dichloropropene (1,3-D) and chloropicrin (CP) from surface seals and soil treatments in the 2006 field trial. Plotted data are averages of three replicates. Manure, composted steer manure; HDPE, high density polyethylene; KTS, potassium thiosulfate.

The KTS application treatments were shown to be most effective in reducing fumigant emissions, especially for CP in this trial. However, surface soils from all KTS treatments showed a distinct reddish-orange color accompanied by a strong and unpleasant odor. This odor and color lasted for a couple of months and slowly diminished during the winter rainy season. The color change in this soil only occurred in the fumigated areas and was not observed in the non-fumigated areas with KTS applications. Zheng et al. (2007) reported that volatile 1,3-D can react with thiosulfate to generate a nonvolatile Bunte salt via a chemical reaction. Although this derivative was relatively stable in neutral and moderately acidic aqueous solutions, several volatile/semivolatile organic sulfur products were detected in soils treated with the thiosulfate derivative of 1,3-D. These sulfur compounds were produced through biological processes and suspected to be the source of the strong odor. The fate of these compounds and environmental impacts are still not clear. From our field test results, the soil color change from KTS application to fumigated soils indicates soil chemical reactions that are not fully understood. These reactions should be better understood before recommending KTS use for fumigant emission reduction.

The pre-irrigation treatment resulted in the second lowest cumulative emissions of 1,3-D and CP among the treatments. The effectiveness of pre-irrigation was reported earlier. These results suggest that water application 2-4 days prior to fumigation to achieve field capacity at the surface 25-30 cm soil is a feasible solution to reduce fumigant emissions. Pre-irrigation also has an economic advantage compared to other surface treatments because of its easy application. In the current study, pre-irrigation reduced cumulative emissions more effectively than the intermittent water seals, which gave higher emissions after four days for both 1,3-D and CP. The intermittent water seals had a limited effect on reducing fumigant emissions (Figure 3-17; Table 3-5), possibly less effective water seals were formed or remained after irrigation stopped.

Table 3-5. Total emission loss of 1,3-dichloropropene (1,3-D) and chloropicrin (CP) measured over 2 weeks after fumigation in the 2006 field trial.

Treatment <sup>†</sup>	Total Emissions (% of applied) <sup>‡</sup>	
	1,3-D	CP
Control	24 (a, b)	20 (a)
Manure + HDPE	32 (a)	17 (a, b)
KTS + HDPE	18 (b)	3 (b)
Pre-irrigation	19 (b)	9 (a, b)
Intermittent water seal	24 (a, b)	14 (a, b)
Intermittent KTS appl.	13 (b)	3 (b)

<sup>†</sup> Manure, composted steer manure; HDPE, high density polyethylene; KTS, potassium thiosulfate.

<sup>‡</sup> Within a column, means (n=3) with the same letter in parentheses are not significantly different according to Tukey's HSD test ( $\alpha=0.05$ ).

### 3.5.3 Fumigants in Soil-Gas Phase

Fumigant concentration in the soil-gas phase monitored over time is shown in Figure 3-20. Distribution patterns of CP were similar to 1,3-D with generally lower concentrations than that of 1,3-D (data not shown). Higher fumigant concentrations were usually observed at location *a* compared to between shank-injection lines (location *b*, data not shown) especially at earlier sampling times. The highest fumigant concentrations observed for each treatment was near the injection depth (50 cm) at 6 or 12 h following fumigation for location *a* and usually 12 or 24 h for location *b*. This reflects the time required for distribution of fumigants throughout the soil to achieve a uniform distribution. The maximum concentrations at 12 h ranged from 19 to 23 mg L<sup>-1</sup> for location *a* and from 9 to 14 mg L<sup>-1</sup> for location *b*. At 48 h, the continuing redistribution resulted in a much narrower range in the maximum fumigant concentrations among the treatments in soil profile and between locations (6.6 to 7.7 mg L<sup>-1</sup> for location *a* and 5.6 to 7.3 mg L<sup>-1</sup> for location *b*).

The pre-irrigated plots that increased the soil water content again did not inhibit fumigant distribution as similar concentrations and distributions were observed compared to other treatments as well as between locations *a* and *b*. Overall differences in fumigant concentrations in soil at various depths were small among the treatments. Data from the last sampling (2 wk after fumigant injection) indicate that small amounts of the fumigants were present in the soil.

### 3.5.4 Residual Fumigant

Residual 1,3-D and CP extracted from soil samples (fumigants in the solid/liquid phase) taken 14 days after fumigation are shown in Figure 3-21. Concentrations of 1,3-D were higher in upper soil layers than those below. Concentrations of CP were much lower (mostly below 0.2 mg kg<sup>-1</sup>) than 1,3-D. For 1,3-D, only manure-incorporated surface soils had an average of 1,3-D concentrations above 2 mg kg<sup>-1</sup> with a large standard deviation. The results were supported by Kim et al. (2003), whose study showed that adsorption of 1,3-D in native

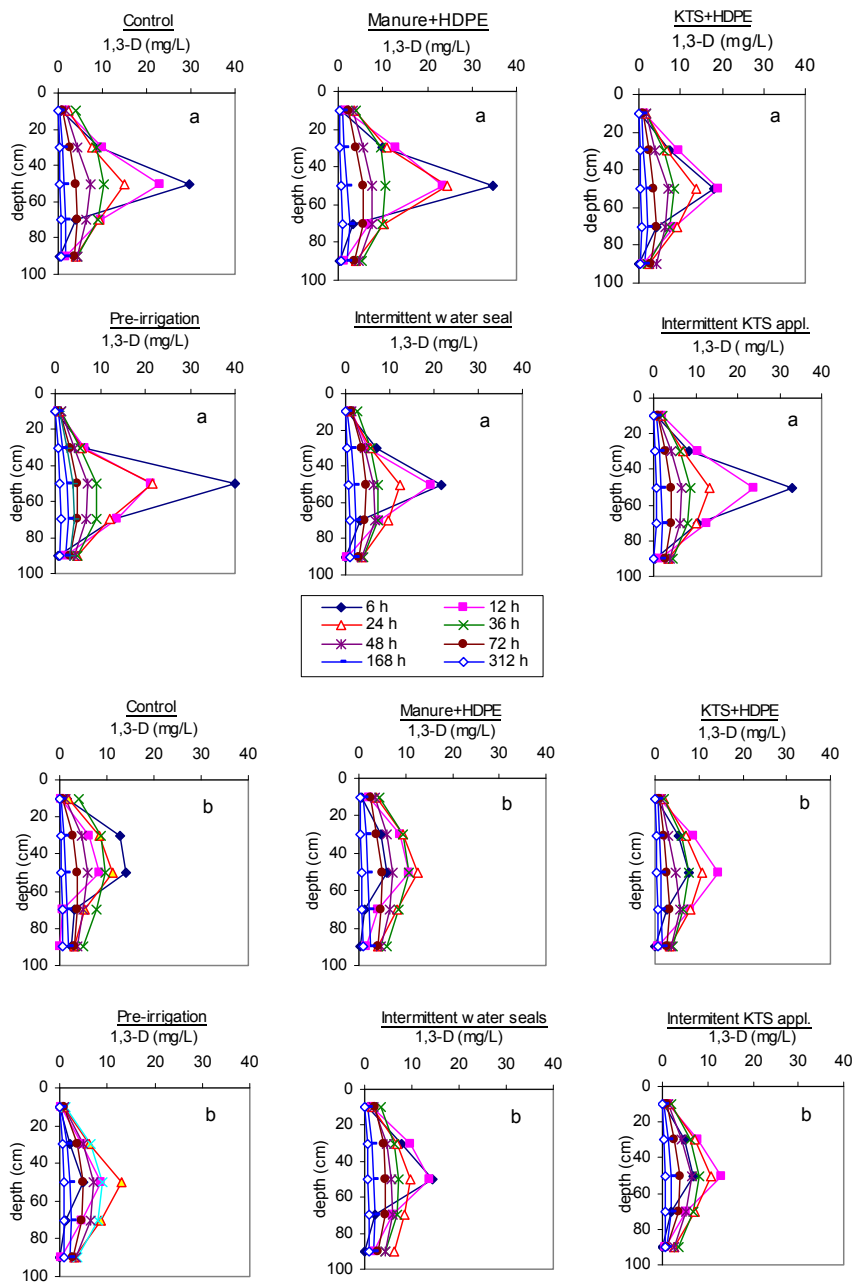


Figure 3-20. 1,3-dichloropropene (1,3-D) distribution in soil-gas phase under various surface treatments at location *a* - adjacent to fumigant injection lines (top six graphs), and location *b* - between injection lines (bottom six graphs) under various surface treatments in the 2006 field trial. Manure, composted steer manure; HDPE, high density polyethylene; KTS, potassium thiosulfate.

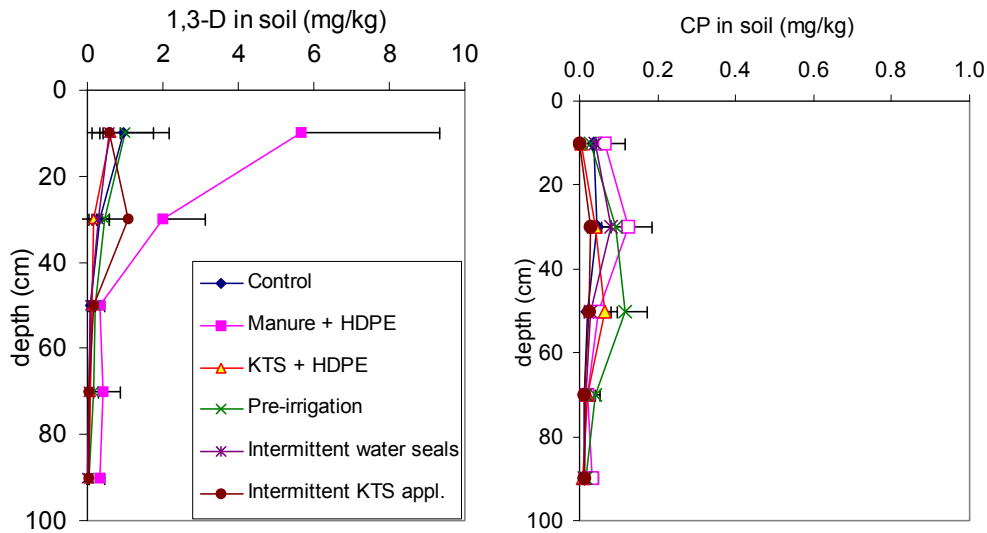


Figure 3-21. Residual 1,3-dichloropropene (1,3-D) and chloropicrin (CP) extracted from soil samples 14 days after fumigation in the 2006 field trial. Error bars are standard deviations of the mean (n=3). Manure, composted steer manure; HDPE, high density polyethylene; KTS, potassium thiosulfate.

soils and soils amended with manure compost increased with increasing soil organic matter content. The higher amounts of residual fumigant in the manure-amended soils partially explains the high emission rates during the daytime when high temperatures may have caused desorption of fumigants from the solid/liquid phase and subsequent partitioning to soil-gas phase.

### 3.5.5 Soil Water Content

To illustrate irrigation on soil water movement or changes, Figure 3-22 shows soil water content measurements over time from the pre-irrigation treatment in comparison with the control. The pre-irrigation treatment was applied 4 days prior to fumigation and the soil water content increased from the highest in surface to the 40 cm depth compared to the non-irrigated treatments. The whole field was irrigated two weeks prior to fumigation and the

control had a fairly uniform soil water distribution by the day before fumigation (8%, v/v) which is about 30% of the field capacity. The pre-irrigated soil had much higher soil water content at soil surface on the day before fumigation (21% v/v or about 80% of FC). The soil water content decreased with depth and with time. By the end of the field trial (2 weeks later), the soil water content for the pre-irrigation about 35-40% of FC. As indicated above, the pre-irrigation did not reduce fumigant concentrations in the soil-gas phase compared to the control and other treatments during the course of the field trial (Figure 3-20) but effectively reduced emissions. The best management for soils with fairly good infiltration is that fumigation should be applied within a few days after irrigation or as soon as soil conditions allow. Irrigation water mostly remains near the surface soil and the higher surface soil water content serves as a good barrier to fumigants.

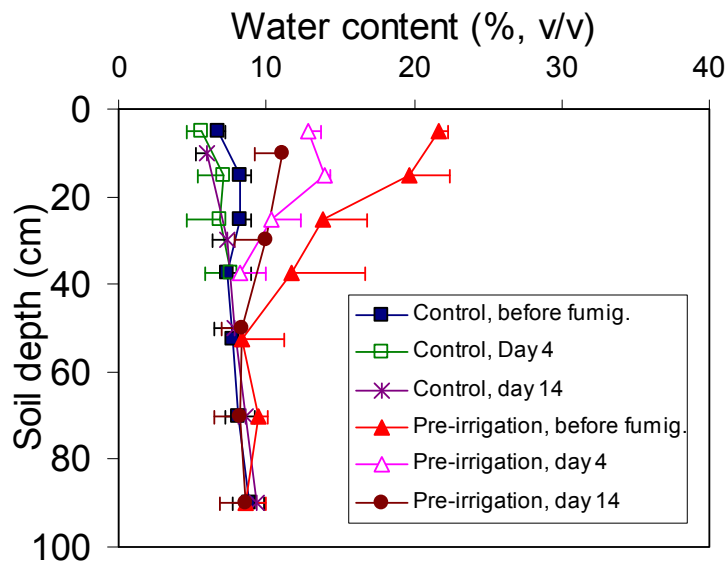


Figure 3-22. Soil water content measured the day before fumigation and 4 and 14 days after fumigation under various surface treatments in the 2006 field trial. Error bars are the standard deviations of the mean (n=3).

### 3.5.6 Conclusion

This field study evaluated the effectiveness of several surface seals or soil treatment methods on emissions of 1,3-D and CP from shank-injection of Telone C35. Treatments included control (bare surface), pre-irrigation (with sufficient amounts of irrigation water 4 days prior to fumigation), post-fumigation water seals with or without potassium thiosulfate (KTS) amendment, and the standard HDPE tarp over soils amended with either KTS or composted manure. The two KTS treatments resulted in the lowest fumigant emissions; however, the soil surface in the treatments developed a reddish-orange color and an unpleasant odor that lasted for a few months. These reactions may not be desirable for subsequent planting, which have never been investigated. The pre-irrigation that did not affect fumigant concentrations in the soil-gas phase reduced emissions more than the post-application intermittent water seals. Pre-irrigation is much more easily managed than water seals. An application of composted manure at  $12.4 \text{ Mg ha}^{-1}$  (~ 5 tons per acre) spread over the soil surface followed by the HDPE tarp did not reduce 1,3-D emissions compared to the bare soils in this trial, indicating that a better understanding of processes is needed to effectively use organic amendments for emission reduction purposes under field conditions.

## 3.6 Field Trial 3 (Year 2007)

### 3.6.1 Emission Flux

Measured emission flux for 1,3-D and CP is shown in Figure 3-23. Statistical analysis on the difference in the peak flux between treatments is given in Table 3-6. The control and manure treatment at  $12.4 \text{ Mg ha}^{-1}$  gave the highest and similar emission rates for both 1,3-D and CP for the first 4 days following fumigation. The manure treatment at  $24.7 \text{ Mg ha}^{-1}$  was slightly lower than the control and the  $12.4 \text{ Mg ha}^{-1}$  manure treatment; however no significant differences were identified. The peak emissions for these three treatments occurred about 30 h after fumigant injection and were significantly higher than the other three treatments. With the continuous monitoring of the emission flux using the DFCs, the flux showed clear diurnal temperature patterns, highest in early afternoon (1200-1500 h) daily and lowest at dawn

(around 0300 h). The water application treatments with or without manure application resulted in the lowest emission rates for 1,3-D within the first 4 days. The manure + HDPE tarp treatment had low peak flux values that were similar to the water treatments.

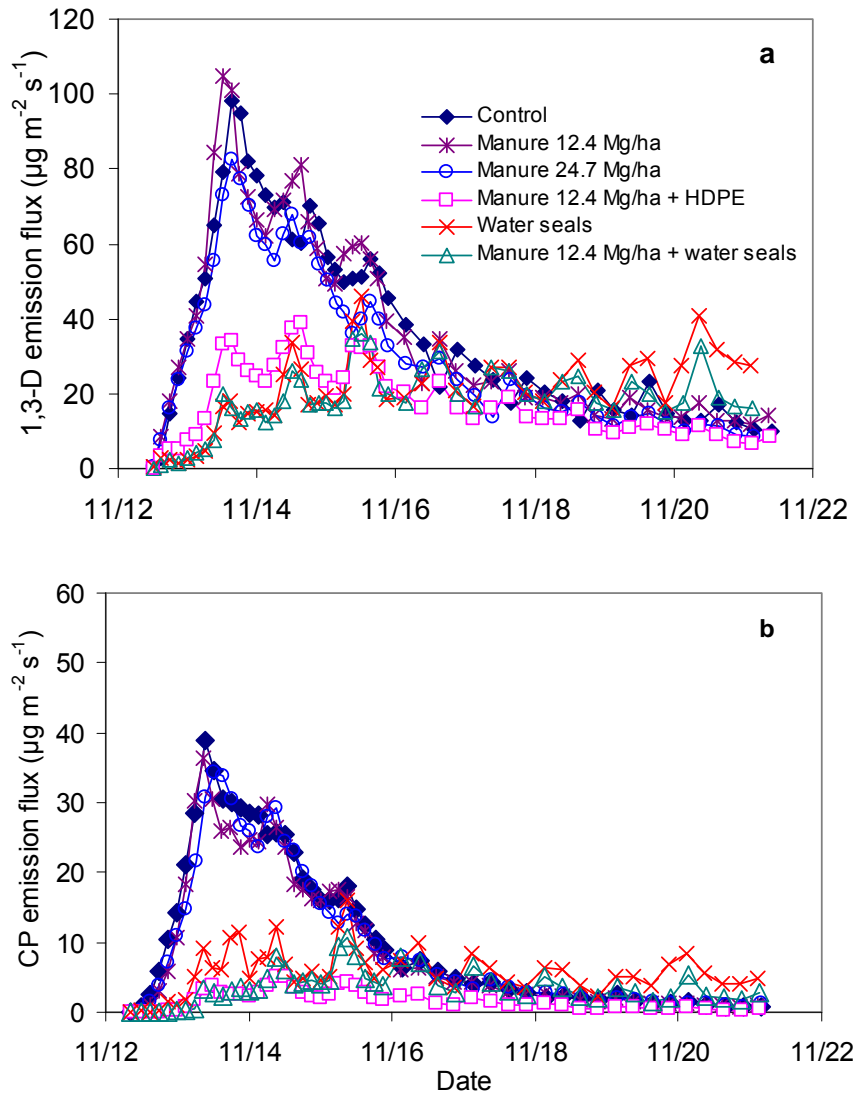


Figure 3-23. Effects of manure and water applications on the emission flux of (a) 1,3-dichloropropene (1,3-D) and (b) chloropicrin (CP) in the 2007 field trial. Plotted data are averages of three replicates. Error bars are not given for the legibility of the figure (significance of the differences between treatments is indicated in Table 3-6).



For the control and manure amendment treatments, the flux decreased dramatically with time after the peak flux, had similar values as the water treatments at day 5 or 6, and continued to decrease thereafter. For the two water treatments (with and without manure amendment), the flux remained low but maintained a steady rate during the 10-d monitoring period. At the end of the monitoring period, the water seals alone had the highest flux, which was significantly higher than all other treatments for 1,3-D and for CP except the manure + water seal treatment. The manure + HDPE tarp treatment had the lowest emission flux for CP among all treatments throughout the experiment (Figure 3-23) indicating the effectiveness of HDPE in controlling CP emissions compared to 1,3-D. Similar results had been observed in previous studies (Gao and Trout, 2007; The 2005 and 2006 field trials above).

### 3.6.2 Cumulative emission loss

The cumulative emission losses of 1,3-D and CP from all the treatments are shown in Figure 3-24. Statistical differences in total emission loss between treatments are given in Table 3-6. The fumigant application rate was  $33.7 \text{ g m}^{-2}$  for 1,3-D and  $19.4 \text{ g m}^{-2}$  for CP. Calculation for cumulative emission loss over the 10-d monitoring period for the control was about 80% of total applied. This value appears unreasonably high considering the relatively moist soil and low temperatures during the field trial in comparison with values reported in the literature (Gao and Trout, 2007; The 2005 and 2006 field trials reported above). It is likely that a systematic error occurred in the DCFs because of unexpected water condensation problems in the field (see discussions below).

#### 3.6.2.1 Overestimation of flux by DFCs

The dynamic chambers had a tendency to overestimate emissions compared to passive chambers that tend to underestimate emissions if sampling and processing are handled improperly (Yates et al., 2003; Gao and Wang, in press). A negative pressure (vacuum) was created inside the chamber due to the constant flow drawn by a vacuum and this pressure deficit was considered so that it would not be significant enough to affect the emission flux estimate. Using the conditions set up in the field, measurements in both the laboratory and

the field resulted in a negative pressure reading of < 10 Pa inside the chamber, which is less than 0.01% difference of an atmosphere. There were no data to illustrate that this pressure deficit would result in overestimation of emission flux on fumigants. Reichman and Roston (2002) indicated, however, that pressure deficits larger than 1.2 Pa in a dynamic flux chamber caused a 20% overestimation in a measured steady-state flux using chlorofluorocarbon (Freon) as the source.

The other most possible source of the overestimation error for the emission flux might be due to water condensation problems in the DFCs when temperatures dropped below the dew point. The water condensation caused malfunctioning of the flow meters. We occasionally observed that in the early mornings (when condensation was highest) some flow meters indicated a zero flow when other test flow meters indicated there was actual air flow through the DFCs. The complexity of the chamber design and air flow path made it difficult to estimate the exact flow at low temperatures in the field. The overall impact of artificially low sampling flow recordings could have contributed to the overestimated emission calculations. The condensation caused problems that were later eliminated by adding a heating unit in the air flow path of the DFCs (Gao et al., 2009). For the 2007 field trial data, we estimated that corrections for the measured emission losses were 20-40% less. This would place the 80% of emission loss to 60% or less for the control, which is more comparable with results from other trials. For these reasons, we chose to report the cumulative emission loss in  $\text{g m}^{-2}$  as the measured value without further corrections. These data are more suitable for comparisons of relative differences between treatment effects on emissions.

#### 3.6.2.2. Comparison of treatments in cumulative emission loss

Over a 10-day monitoring period, the cumulative emission loss for 1,3-D was highest for the control and the manure amendment at  $12.4 \text{ Mg ha}^{-1}$ , followed by the manure amendment at  $24.7 \text{ Mg ha}^{-1}$  (Table 3-6). The cumulative emission loss for the two water seal treatments (i.e., with or without manure application) and the manure + HDPE treatment was about half that of the control. The control and the low rate of manure ( $12.4 \text{ Mg ha}^{-1}$ ) amendment resulted in significantly higher total emission losses than the HDPE tarped manure treatment

and the two water (seals) treatments. The total emission loss of 1,3-D from the high rate of manure ( $24.7 \text{ Mg ha}^{-1}$ ) fell in between; but it was not significantly different from any other treatments due to large variations within the treatment. The results indicate that higher rates of manure application may be required in order to effectively reduce emissions. For CP, the cumulative emission loss from the manure + HDPE treatment was the lowest, significantly lower than all other treatments except the manure + water treatment.

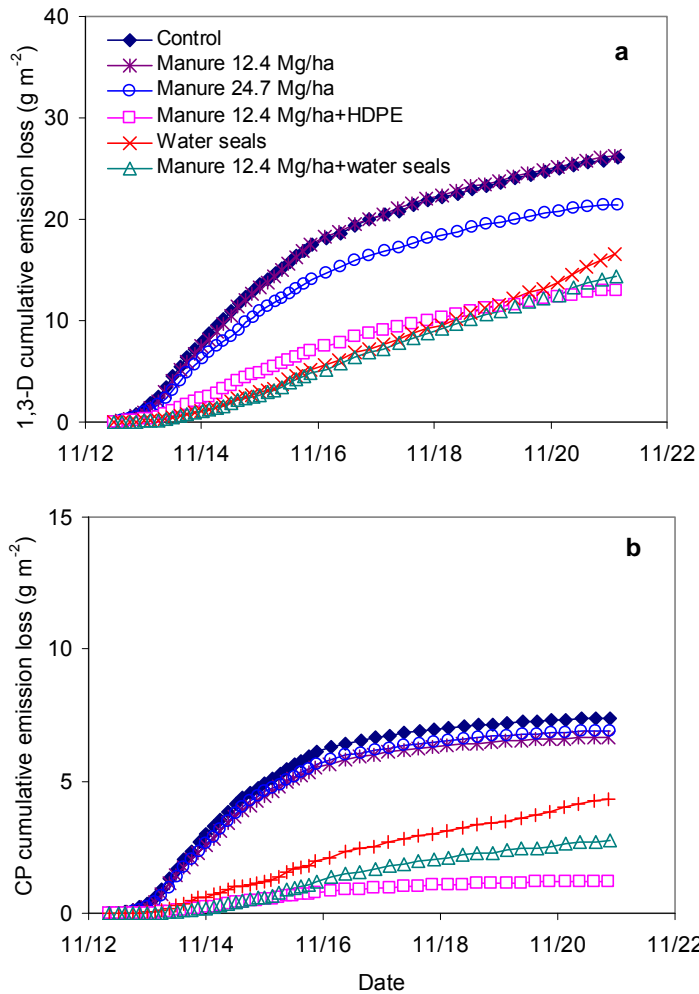


Figure 3-24. Cumulative emission loss of (a) 1,3-dichloropropene (1,3-D) and (b) chloropicrin (CP) from manure amendment and water application treatments in the 2007 field trial. Plotted data are averages of three replicates (significance of the differences between treatments is indicated in Table 3-6). Manure, composted manure; HDPE, high density polyethylene.

Table 3-6. Emission peak and cumulative emission loss of 1,3-dichloropropene (1,3-D) and chloropicrin (CP) monitored over 10 d following fumigation in the 2007 field trial

Treatment <sup>†</sup>	Maximum Emission flux <sup>‡</sup> ( $\mu\text{g m}^{-2} \text{s}^{-1}$ )		Cumulative Emissions <sup>§</sup> ( $\text{g m}^{-2}$ )	
	1,3-D	CP	1,3-D	CP
Control	98.0 (a)	38.8 (a)	26.0 (a)	7.4 (a)
Manure 12.4 Mg ha <sup>-1</sup>	104.9 (a)	36.3 (a)	26.3 (a)	6.2 (ab)
Manure 24.7 Mg ha <sup>-1</sup>	72.8 (ab)	30.7 (a)	21.5 (ab)	6.9 (a)
Manure 12.4 Mg ha <sup>-1</sup> + HDPE	33.3 (bc)	3.3 (b)	13.0 (b)	1.2 (d)
Water seals	16.7 (c)	3.4 (b)	16.5 (b)	4.3 (bc)
Manure 12.4 Mg ha <sup>-1</sup> + water seal	20.0 (c)	3.4 (b)	14.4 (b)	2.7 (cd)

<sup>†</sup> Manure, composted manure; HDPE, high density polyethylene.

<sup>‡</sup> Within a column, means (n=3) with the same letter in parentheses are not significantly different according to Fisher's Protected Least Significant Difference (LSD) procedure ( $\alpha=0.05$ ).

<sup>§</sup> Fumigant applied was about 33.7 g m<sup>-2</sup> 1,3-D and 19.4 g m<sup>-2</sup> CP. The cumulative emission loss of 1,3-D for the control was substantially higher than expected, about 80% of applied based on measured emission flux using dynamic flux chambers. Contributed errors might be caused by the malfunctioning of flow meters due to water condensation in the field. The estimated correction factor for the measured emission losses were 20-40% less. Reported values here were used for a comparison of relative differences between surface treatments.

The steady increase in cumulative emission loss for the two water seal treatments (with and without manure amendment) (Figure 3-24) was the result of the relatively constant emission flux throughout the monitoring period (Figure 3-23). The high surface soil water content in the water seal treatments could reduce emissions by inhibiting fumigant transport to soil surface as discussed above. On the other hand, high surface soil water content may have also retained fumigants in soils including those dissolved in the liquid phase, which may have provided the continuous source for emissions.

The overall emission data indicate that manure application at rates of 12.4 and 24.7 Mg ha<sup>-1</sup> (~ 5 and 10 tone per acre) did not significantly reduce emissions in this trial. The HDPE tarped manure treatment reduced emissions. Recall that the manure (12.4 Mg ha<sup>-1</sup>) + HDPE treatment tested in the 2006 field trial that did not reduce emission as discussed above. The differences between the two field trials were that in the 2006 trial the manure was not incorporated into the soil, the surface soil water content was lower (5.4% in 2006 vs. 7.6%, v/v in this trial), and temperatures were higher (avg. max. air temperature 25.4 vs. 18.7 °C). None of these changed conditions resulted in the effectiveness of composted manure in reducing emissions under field conditions, which appear contradictory to those reported effective.

Further examination of the effectiveness of OM amendment on emission reduction from soil fumigants revealed that most studies showing OM amendments to be effective in reducing emissions applied either much lower fumigant application rates or much higher OM rates than the two field trials we conducted that showed OM amendment to be ineffective. In our 2006 and 2007 field trials, the fumigation rate was near the maximum allowable Telone Rate in California that is used for perennials with actual tested rates of 500-550 kg ha<sup>-1</sup> Telone C35. The 12.4 and 24.9 Mg ha<sup>-1</sup> manure application rate are equivalent to 5 and 10 tons per acre. Dungan et al. (2005) reported that amendment rates with composted steer manure and composted chicken manure at 33 and 65 Mg ha<sup>-1</sup>, respectively, to surface (5 cm) soils effectively reduced emissions from drip-applied emulsified formulation of 1,3-D in raised beds. The fumigation rate was 130.6 kg ha<sup>-1</sup> of InLine (containing 77 kg ha<sup>-1</sup> of 1,3-D), about a quarter of the tested rates we used in the 2006 and 2007 field trials. Yates et al. (in press) reported that OM was very effective in reducing emissions based on a large-scale field trial also had a very low application rate (133 kg ha<sup>-1</sup> Telone II) in addition to the 300 tons per acre of green-waste incorporated into the field a year prior to fumigation. Most laboratory studies often used higher OM application rates that are well-mixed with the soil (difficult to achieve in the field) (e.g., Gan et al., 1998b, McDonald et al., 2008) and lower fumigant injection rates to avoid a prolonged experiment time (e.g., Table 2-1). Apparent conclusions can be made that OM amendments can be effective when substantially high ratios of OM

materials to fumigants is tested. When a high fumigation rate is required for satisfactory pest control as is the case for perennials, it may be a great challenge to control emissions with the growers normally-applied OM rate for improving soil physicochemical properties. This means that a substantially higher OM amendment rate may be necessary for emission reduction purposes. The data also suggest that the amount of materials (fumigant and OM) used, and the interaction kinetics between fumigants and organic materials applied, may have played a large role in determining the effectiveness of OM materials on emission control. Other possible ways to enhance the effects of OM in reducing emissions may include water application or soil preparation, etc. There is still work remaining to clarify when and under what conditions OM amendment should be used to guarantee emission reduction from soil fumigation especially at high application rates.

Dungan et al. (2005) also reported that different amendment rates with different OM materials resulted in different emission reduction. This indicates that source materials may also determine their effectiveness on fumigant emission reduction. As a soil amendment material, composted manure is used mostly below 25 Mg ha<sup>-1</sup> in conventional farmlands. Better characterization of organic materials may also be needed in future studies. Higher composted manure application rates may be associated with higher costs unless growers have access to free materials. An application of 25 Mg ha<sup>-1</sup> (10 tons per acre) would cost roughly \$250-\$800 ha<sup>-1</sup> (\$100-&300 per acre) considering delivery and material costs, and potentially more depending on delivery distance from the source.

### 3.6.3 Fumigant in Soil-Gas Phase

Distribution of 1,3-D in the soil-gas phase is given in Figure 3-25. Chloropicrin (data not shown) followed similar patterns as that of 1,3-D except at lower concentration levels because CP dissipates more rapidly than 1,3-D from soils as discussed earlier.

A difference in fumigant distribution was observed between sampling locations in the first day or two for all treatments, i.e., higher fumigant concentrations at Location *a* - adjacent to fumigant injection lines than Location *b* - between injection lines (data not shown). The least

difference was observed from the bare-soil control treatment. The differences between locations decreased over time. The highest concentrations of 1,3-D ( $20\text{-}25\ \mu\text{g cm}^{-3}$ ) at Location *a* were observed within 12 h and 24-48 h at Location *b*. At Location *a*, fumigant concentrations were similar by 24 h among all surface treatments except the manure + water seal treatment which had much lower concentrations. Because there was no replicate measurement at the soil gas sampling locations for each treatment, it was uncertain if the much lower soil gaseous fumigant concentration in the manure + water seal treatment was due to the addition of manure and water or potential problems with sampling probes. The manure + HDPE treatment was not monitored for soil gaseous fumigants as the 2006 field trial indicated no difference from the control.

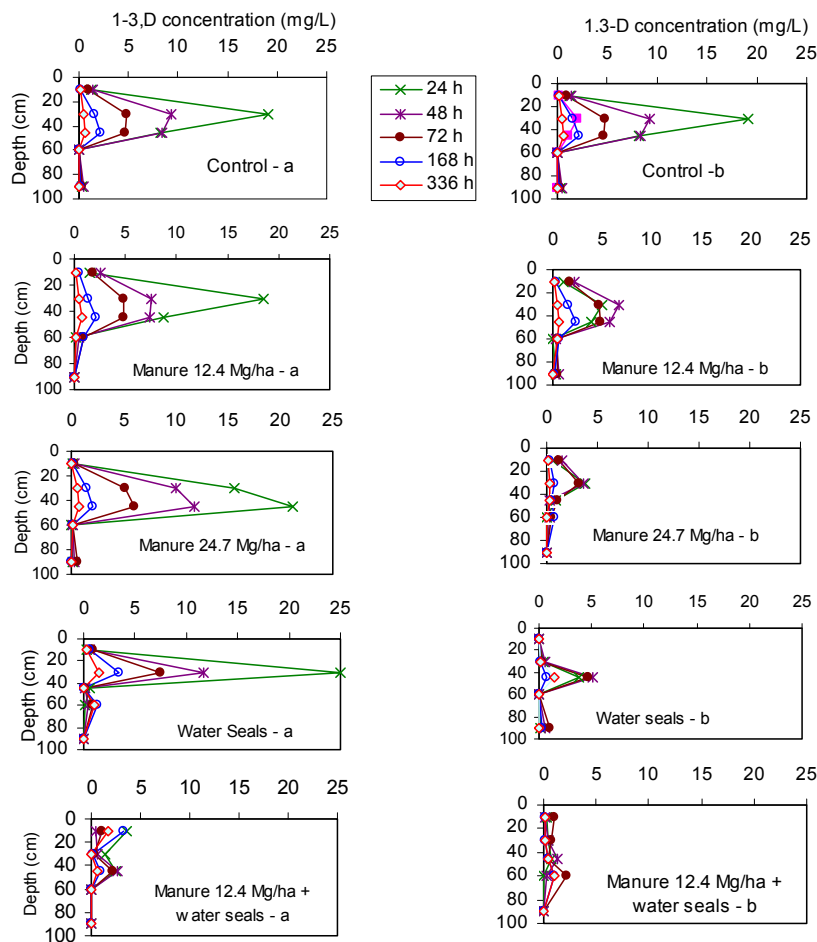


Figure 3-25. 1,3-dichloropropene (1,3-D) concentration in the soil-gas phase at location *a* (adjacent to fumigant injection line; graphs on the left side) and at location *b* (between fumigant injection lines; graphs on the right side) in the 2007 field trial.

### 3.6.4 Soil Residual Fumigant

Residual fumigants extracted from soil samples at the end of the trial are given in Figure 3-26. The amount of residual fumigants in the soil (liquid + solid phase) followed similar trends as the soil water content (Fig. 3-27), i.e., water seal treatments and the HDPE tarped treatments had relatively higher fumigant concentrations especially in the surface soils compared to the control and the two manure amendment treatments. Increasing soil water content increases the total portion of fumigants in the aqueous phase compared to the vapor phase. The highest residual fumigant concentrations and the greatest differences among the treatments were observed in the top 30 cm surface soils. The higher residual fumigant concentrations in the water treatments compared to other treatments partially support the continuous emissions observed from these treatments throughout the monitoring period (Figure 3-23). The average concentrations in the soil profiles were analyzed statistically. The manure + HDPE and the two water seal treatments had significantly higher concentrations (ranging from 1.1 to 1.2 mg kg<sup>-1</sup>) than the control and the two rates of manure treatment (ranging from 0.2 to 0.3 mg kg<sup>-1</sup>). The data indicate again that water seals and the manure amendment under HDPE tarp could result in longer residence time of fumigants in the soil. Residual CP concentrations in the soil were extremely low (<0.02 mg kg<sup>-1</sup>) for all treatments due to much faster dissipation or degradation rates compared to 1,3-D.

### 3.6.5 Soil Moisture and Temperature

Soil water content measured at the end of the trial is shown in Figure 3-27. Irrigation increased soil water content mostly in the surface 20 cm of soil. Water seal treatments (with or without manure amendment) resulted in significantly higher ( $\alpha=0.05$ ) surface (0-20 cm) soil water content (12.2-12.7%, v/v) than the control and manure amendment treatments (7.8-9.2, v/v). The manure + HDPE treatment resulted in an average soil water content of 9.2% (v/v), which is not significantly different from any other treatments. Prior to fumigation, soil water content of the surface soils averaged 12% (v/v) and it decreased about 3-4% from evaporation loss and seepage when no additional irrigation or tarping was applied. The additional irrigation maintained higher soil water content in surface soils which reduced



emissions significantly during the first few days (Figure 3-23); however, reductions for cumulative emission losses are less (Figure 3-24).

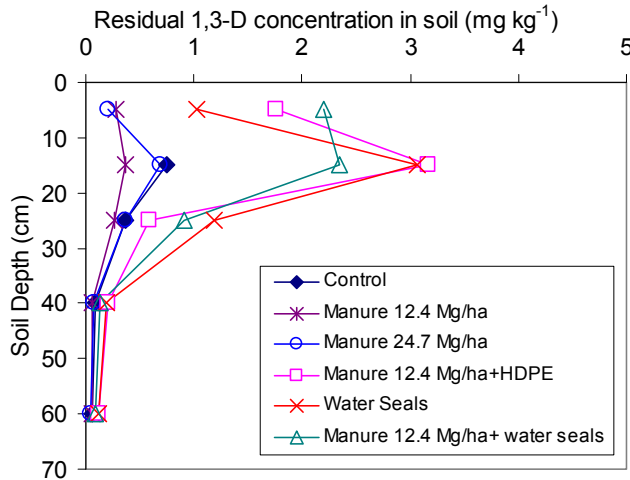


Figure 3-26. Residual 1,3-dichloropropene (1,3-D) and chloropicrin (CP) extracted from soil samples 10 days after fumigant injection in the 2007 field trial. Plotted data are averages of three replicates. Manure, composted manure; HDPE, high density polyethylene.

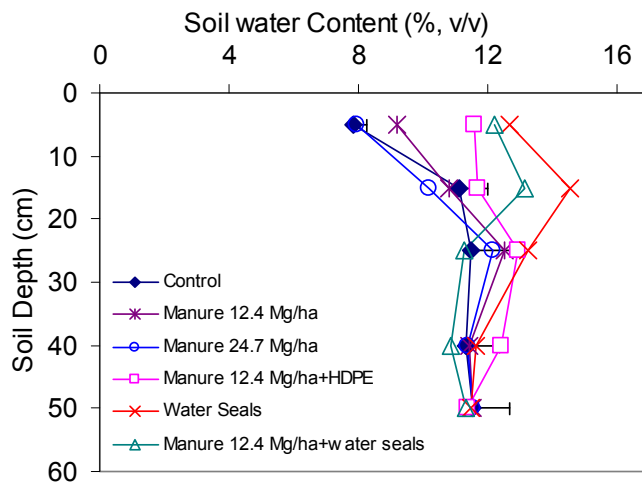


Figure 3-27. Soil water content measured at the end of the 2007 field trial. The field capacity is 26% (v/v). Plotted data are averages of three replicates. Manure, composted manure; HDPE, high density polyethylene.

Soil temperature changes measured near the soil surface (10 cm) is shown in Figure 3-28. Tarping resulted in higher temperatures than bare soils. The water seal treatments resulted in the lowest soil temperatures. Implications of soil temperature changes on emissions are rather complicated as a number of processes are affected. For example, at a lower temperature, the fumigant diffusion rate was reduced leading to low emissions; but the fumigant degradation rate could also be reduced. Tarping, water seals and OM amendment may increase residence time of fumigants in soils. Emissions resulted from a surface treatment in the field is the net effect of simultaneous changes of several factors (e.g., moisture, temperature) and processes affecting both the degradation and diffusion of fumigant in soils. A modeling approach involving all these processes simultaneously would be helpful to evaluate these factors on the fate of fumigant in soils. Up to this time, there is no such adequate model, which appears a significant gap in fumigant research.

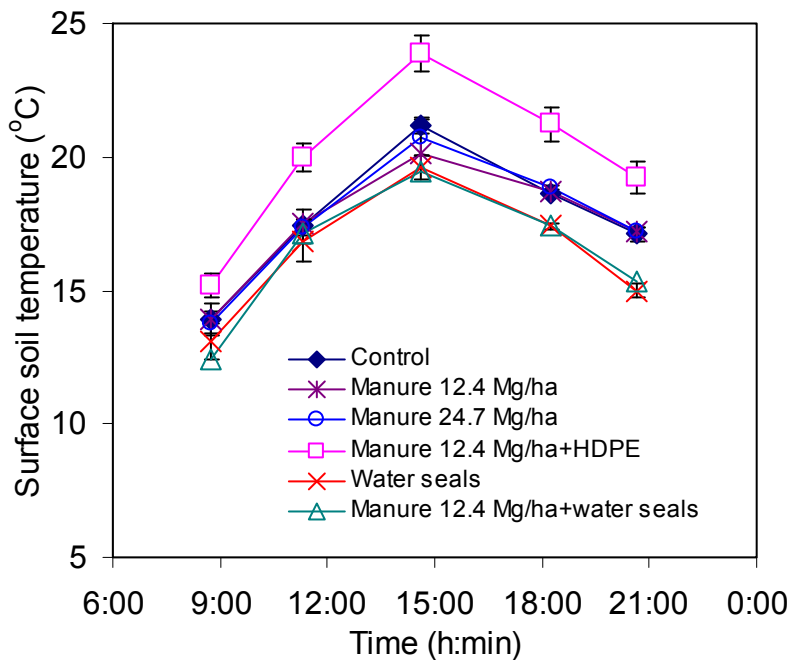


Figure 3-28. Soil temperatures measured at a 10 cm depth on October 5, 2007 during the 2007 field trial. Error bars are standard deviations of the mean (n=3). Manure, composted steer manure; HDPE, high density polyethylene.

### 3.6.6 Conclusion

This field trial evaluated the effect of incorporated composted manure with or without water (seal) applications on fumigant emissions when Telone C35 was shank-applied at 553 kg ha<sup>-1</sup>. Treatments included a bare-soil control, composted dairy manure at 12.4 and 24.7 Mg ha<sup>-1</sup> (equivalent to 5 and 10 tons per acre), post-fumigation intermittent water seals (11 mm water irrigated immediately following fumigation, and 4 mm at 12, 24, and 48 h), and incorporation of manure at 12.4 Mg ha<sup>-1</sup> combined with the water seals or a high density polyethylene (HDPE) tarp. The results indicate that there was no significant difference in the emission peak flux and cumulative emission loss between the control and the two manure amendment rates (12.4 Mg ha<sup>-1</sup> and 24.7 Mg ha<sup>-1</sup>), although the higher rate gave a slightly lower emission flux and cumulative emission loss. In contrast, water seals with or without manure incorporation significantly reduced both peak emission rates (80% reduction) and cumulative emission loss (~50% reduction). The manure + HDPE treatment resulted in the lowest CP emissions but slightly higher 1,3-D emissions than the water treatments. Reductions in the peak emission flux by the water treatments demonstrate the consistency to reduce potential exposure risks to workers and bystanders.

Overall, two field trials failed to demonstrate that incorporation of composted manure up to 10 tons per acre can effectively control fumigant emissions under field conditions when relatively high fumigation rates are used. Careful examination of the studies reported OM amendment was effective in reducing emissions revealed that either very low fumigation rates or very high amendment rates of OM materials were used. Apparent conclusions can be made that OM amendment can be effective only with a substantially high ratio of OM materials to fumigants. At the high fumigation rates required to ensure satisfactory pest control, as in the case of perennials, the challenge may be great for using OM amendments to control emissions.

#### **4.0 SUMMARY**

Since the phase-out of MeBr, 1,3-D and CP have been increasingly used as alternative chemicals in pre-plant soil fumigation for several important commodities in California. Stringent environmental regulations are being developed to reduce emissions of soil fumigants to reduce the potential exposure risks and VOC emissions particularly in ozone-non-attainment areas. The goal of this project was to develop effective and feasible field management practices to reduce fumigant emissions from field fumigation while ensuring good soil pest control. The intent was to assist commodities that have been relying on MeBr soil fumigation to transition to alternatives. Scenarios for perennials are targeted for testing because high fumigation rates are required for satisfactory control of the soil pests. Open-field perennial nurseries must deliver parasitic nematode-free crops under the CDFA's Nursery Stock Nematode Control Program. Effective emission control methods for high fumigation rates should be applicable to most other scenarios.

The project utilized an approach of both field and laboratory tests. Three field trials and three lab experiments were carried out to evaluate the effect of fumigation methods and various surface treatments on emission reductions from soil fumigation. Each trial or experiment had specific objectives (Tables 2-1 and 2-2). A treatment was sometimes repeated between trials to increase the confidence in the conclusions. Treatments included application method (shank vs. subsurface drip), water treatments (pre-fumigation irrigation and post-fumigation water seals), tarping with the standard HDPE or low permeable VIF, and surface soil amendment with chemicals (thiosulfate: ATS or KTS) and organic materials (composted manure). Emissions and fumigant concentration changes in the soil-gas phase (to assess the potential effect on pest control) were monitored. Residual fumigant was determined at the end of each experiment using a mass balance approach to evaluate the fate of fumigants in soil and implications on fumigation management.

The three laboratory soil column experiments were designed to test variables under closely-controlled study conditions, which is often difficult to achieve in the field. The results, however, may not represent what actually would occur for the same treatment under field

conditions (e.g., total emission loss and soil-gas distribution patterns) because of the limitations of the columns in addition to the use of disturbed soils. Caution should be taken when extrapolating laboratory data to the field environment. The laboratory tests were utilized for supporting or directing further field tests.

The first soil column experiment determined the effectiveness of ATS and surface soil amendments with composted steer manure amendments or in combination with a small amount of water application (9 mm) or HDPE tarp on reducing the emissions of 1,3-D. ATS amendments at 1:1 and 2:1 molar ratio (ATS:fumigant), manure at 5% (w/w), and HDPE tarp over 1:1 ATS and the manure amendment were tested. Cumulative 1,3-D emission losses over two weeks were greatest for the control (51% of total applied) and lowest in the HDPE tarp over ATS (1:1 ATS:fumigant molar ratio) and manure treatments (16-24%). The 2:1 ATS and manure treatment alone gave relatively high emissions (29–39%). The 1:1 ATS and one-time water seal alone gave emissions (40-43%), not much less than the control. The manure treatment was shown to be effective in reducing emissions in this experiment, which is in agreement with some results reported in the literature.

The second soil column experiment evaluated the effectiveness of intermittent water seals on the emission reduction of *cis*-1,3-D from three different soil textures (Atwater loamy sand, Hanford sandy loam, and Madera loam). When no water seals were applied, fine-textured soils gave lower emissions than coarse-textured soils due to different soil OM and clay content. With sufficient amounts of water applied, water seals were shown to be effective in reducing emissions from all three soils, while with lower amounts of water, water seals did not reduce emissions in the sandy soil. The results indicate that intermittent water seals can be used to reduce emissions for a relatively wide range of soil textures.

The third soil column experiment evaluated specifically how different soil moisture conditions affect fumigant emissions in an effort to determine an optimum range of soil water content to reduce emissions while not reducing fumigant concentrations or distribution in the soil that may impact pest control. Soil water content levels from 30% up to 100% of field capacity were tested. As soil water content increased, fumigant peak emission flux was

significantly reduced and its occurrence time was delayed. Similar to water seals, by increasing soil water content, the emission reduction effect on the peak flux is more profound than on the cumulative loss. This might be partially due to the column effect in this test. It is expected that the soil moisture effect on the emission reduction would be greater under field conditions if the same conditions as in the columns can be achieved. Increasing the soil water content within the studied range did not reduce fumigant concentrations in the soil-gas phase; on the contrary, increased fumigant concentrations were observed because of the reduced emissions and increased fumigant retention in the soil. The column test results for specific moisture conditions should be validated by further field tests as field/environmental conditions vary, the proper range of soil water content for providing the anticipated benefits for different soil types are expected to vary. Maintaining a relatively high soil moisture condition at the surface or above the fumigant injection depth provides the benefit of reducing emissions and retaining fumigants in soil by reducing diffusion of fumigants to soil surface.

The 2005 field trial investigated the effects of the fumigation method (shank-injection vs. subsurface drip-application) and selected surface treatments (irrigation and plastic tarps) on the emission reduction of 1,3-D and CP from shank-injection of Telone<sup>®</sup> C-35 and drip-application of InLine<sup>®</sup>. With the same surface treatment, the subsurface drip-application gave generally lower emissions compared to the shank-injection. Over a 2-wk monitoring period, the highest emission loss was from the bare soil (36% 1,3-D and 30% CP) and HDPE tarp (43% 1,3-D and 17% CP) from shank-injection. Pre-irrigation (with 40-mm of water application 4 days prior to fumigation) and VIF tarp over shank-injection had similarly low emission losses (19% 1,3-D, and 8-9% CP). The HDPE tarp and water applications (seals) before and after the subsurface drip-application resulted in the lowest emission losses (12-13% 1,3-D, and 2-3% CP). All fumigation treatments provided 100% efficacy to control citrus nematodes in bags buried from 30 to 90 cm below the soil surface. This field trial confirmed the findings from the column experiment that irrigation treatments (pre-irrigation and drip-application) used to increase soil water content can effectively control emissions of 1,3-D and CP under field conditions. Using water costs much less compared to plastic tarps,

and these treatments provide options for orchards with low-profit margins, especially those with portable irrigation systems.

The 2006 field trial evaluated several surface treatments (pre-irrigation, post-fumigation water seals, KTS in water seals or under HDPE tarp, manure plus HDPE tarp) to reduce emissions of 1,3-D and CP from shank-injection of Telone C35. The KTS treatments were found extremely effective in reducing emissions; however, the KTS application resulted in a reddish-orange soil color and an unpleasant odor that lasted for a few months. These reactions may not be desirable for subsequent planting, which has not been investigated carefully. The pre-irrigation (34 mm of water application 4 days prior to fumigation) in this trial reduced emissions more than the post-application intermittent water seals (13 mm water immediately following fumigation and 4 mm water at 12, 24, and 48 h). Again the pre-irrigation did not reduce fumigant concentrations in the soil-gas phase compared to other treatments. This further confirmed the previous laboratory and field findings on the effectiveness of adequate soil moisture for emission reductions. An application of composted manure at 12.4 Mg ha<sup>-1</sup> (~ 5 tons per acre) spread over the soil surface followed by the HDPE tarp did not reduce 1,3-D emissions in this trial.

The 2007 field trial focused on the evaluation of manure incorporation into surface soils with or without water seals on fumigant emissions from shank injection of Telone C35. Composted dairy manure was tested at 12.4 and 24.7 Mg ha<sup>-1</sup> (equivalent to 5 and 10 tons per acre, respectively). The results indicate that the manure applications did not reduce emissions (neither peak flux nor cumulative loss). Water seals (11 mm water immediately following fumigation and 4 mm water at 12, 24, and 48 h), however, with or without manure incorporation reduced both peak emission flux (80% reduction) and cumulative emission loss (~50% reduction). The treatment with the incorporated manure under the HDPE in this trial gave the lowest CP emissions but slightly lower 1,3-D emissions than the water seal treatments. The difference is that the soil in the 2007 field trial contained a higher water content than the 2006 field trial at the time of fumigation.

Summarizing the results from the laboratory experiments and field trials can lead to a few conclusions regarding field practices that can be utilized to control emissions in soil fumigation. Subsurface drip-application tends to have lower emissions than shank-injection because of the reduced mobility of fumigants to the soil surface due to increased soil water content. Once the fumigation method is set, surface sealing/treatments have a profound effect on emissions. The following are primarily based on tests from broadcast shank applications. Pre-irrigation to achieve proper soil water content (at the minimum of the label requirements by using the hand-feeling method) at the time of soil fumigation is critical to ensure emissions are as low as possible. The higher the soil water content, the lower the emissions will be. However, excessive amounts of water are not recommended as reduced fumigant diffusion through the soil may negatively impact pest control. Laboratory data showed that increasing soil water content to field capacity in a sandy loam soil did not reduce fumigant concentrations in soil columns. Field data indicate that irrigation with the amount of water that could achieve field capacity in the top one foot four days prior to fumigation can provide substantial emission reduction in a sandy loam soil. Pre-irrigation can be achieved either from irrigation or by taking advantage of precipitation when applicable. Post-fumigation intermittent water seals to maintain the surface 4-6 inch soil with a high water content have been consistently observed to reduce 1,3-D and CP peak emission flux, especially during the period of water applications, although cumulative emission loss was less effectively reduced. Reducing the peak emission flux can reduce the potential exposure risks to workers and bystanders. Generally speaking, irrigation is less costly and no material disposal is required compared to using plastic tarps. Plastic tarps with the standard HDPE alone can not reduce emissions of 1,3-D in relatively dry soils but can reduce emissions to some extent with moist soils and/or at low temperatures. Total emissions can be reduced up to 50% of total applied 1,3-D using the irrigation treatments or the standard tarp.

Although surface soil amendment with composted manure was shown to be effective in reducing emissions in laboratory studies, amendment rates up to 10 tons per acre did not show emission reduction for the high fumigation rates tested (or the maximum allowable rate in CA) in the field unless water seals were applied at the same time. ATS or KTS treatment, either with water seals or applied under the HDPE tarp, have consistently shown significant



emission reduction (up to 50% emission reduction) in both peak flux and cumulative loss. The observed soil color changes and odor may prevent its adoption on a large field scale until these potential problems are addressed. The low permeable film, VIF, is the most effective emission reduction technique (up to 90% emission reduction) as long as the tarp can be installed successfully in the field. However, the VIF tarp technology is the most costly; thus, it may be feasible only for commodities with high-profit margins (e.g., almonds/nut trees, nurseries).

Some questions remain regarding feasible and economical field management practices to effectively minimize fumigant emissions. 1) Two field trials failed to prove that the normal manure incorporation rate used by growers can effectively reduce soil fumigant emissions when high fumigation rates that ensure satisfactory pest control are used. The effectiveness of OM in reducing emissions reported in the literature was tested at either a much lower fumigation rate or at an exceptionally high OM application rate. These options may apply to annual field or vegetable crops; but for perennials, the drawbacks are either with unsatisfactory pest control or associated with high costs, unless OM materials can be obtained for free. The effective OM rate or the ratio of OM to fumigant and the source materials for reducing fumigant emissions need to be further clarified in order to conclude whether OM amendment can be managed as an effective practice to control fumigant emissions. 2) Thiosulfate (ATS or KTS) has been tested at high ratios (up to 4:1 molar ratio) in all studies including those reported in the literature. At the 1:1 ATS:fumigant molar ratio, the amount of the N nutrient input is several times that of most crops' need (Gao et al., in press). In the case when KTS is used (N is excluded), the observed soil color change and odor in the field may also be due to excessive amounts of thiosulfate applied. Strategies with low application amounts of ATS or KTS to reduce emissions have not been investigated in the field at the high fumigation rates. It is possible that the combination of low amounts of KTS application in a soil with adequate soil water content and the standard HDPE tarp may achieve significant emission reduction based on what we have learnt from the field trials and lab experiments. 3) Although pre-irrigation has been confirmed to reduce emissions with the increase in soil water content, the amount of water in pre-irrigation to maximize this effect has not been fully determined for different seasons and especially for different soil types. 4)

Concerns of tarp damage during installation of VIF continue to remain although the low permeable tarps can substantially reduce emission as well as improve efficacy because of their capability to retain fumigants under the tarp. Other treatments (irrigation, soil amendment) that reduce emissions are based on either reducing fumigant diffusion/transport or increasing degradation, which may lead to a negative impact on efficacy. The low permeable film has the potential to allow reduced application rates that may compensate for some of the high costs associated with the use of the material. This type of film, however, was reported to have potential problems with being damaged during installation. Practical materials and application methods need to be worked out in this regard. A new film (so-called totally impermeable film or TIF) has emerged recently for testing and easy field installation has been claimed. Choices of emission reduction techniques to be made by various commodities should consider the practicality for their production system, effectiveness on emission reduction, potential impact on pest control, and affordability.

## 5.0 REFERENCES

- Ajwa, H, W.J. Ntow, R. Qin, and S. Gao. 2010. Chapter 9. Properties of soil fumigants and their fate in the environment. *In* Robert Krieger (ed.) Hayes' Handbook of Pesticide Toxicology. Elsevier Inc. (in press)
- Ajwa, H.A., and T. Trout. 2004. Drip application of alternative fumigants to methyl bromide for strawberry production. *HortScience* 39:1707–1715.
- Ajwa, H.A., S. Klose, D. Neilson, A. Minuto, M.L. Gullino, F. Lamberti, and J.M. Lopez-Aranda. 2003. Alternatives to methyl bromide in strawberry production in the United States of America and the Mediterranean Region. *Phytopathol. Mediterr.* 42:220–244.
- Ashworth, D.J., and S.R. Yates. 2007. Surface irrigation reduces the emission of volatile 1,3-dichloropropene from agricultural soils. *Environ. Sci. Technol.* 41:2231-2236.
- Browne, G., J. Connell, H. Becherer, S. McLaughlin, S. Schneider, R. Lee, and E. Hosoda. 2003. Evaluation of rootstocks and fumigants for control of almond replant disease. p.11 (1-2) *In* Proc. Annual Int. Res. Conf. on MeBr Alternatives and Emissions Reductions, Nov. 3-6, 2003, San Diego, CA. Available at:

<http://www.mbao.org/2003/011%20brownegrootstocks%20fumigants%20and%20almond%20rd%20fin%20browne.pdf> (verified 31 March 2010).

California Department of Pesticide Regulation (CDPR). 2006. Pesticide air initiative: Strategy to reduce toxic and volatile organic compound emissions from agricultural and commercial structural pesticides (concept paper). CDPR, Sacramento, CA. Available at <http://www.cdpr.ca.gov/docs/empm/airinit/airinit.htm> (verified 31 March 2010)..

California Department of Food and Agriculture (CDFA). 2008. Nursery Inspection Procedures Manual (NIPM) Online. CDFA, Sacramento, CA. Available at: <http://www.cdfa.ca.gov/phpps/pe/Nursery/NIPM.html> (verified 31 March 2010).

CDPR. 2007. Pesticide Use Reporting - 2006 Summary Data. CDPR, Sacramento, CA. Available at: [http://www.cdpr.ca.gov/docs/pur/pur06rep/06\\_pur.htm](http://www.cdpr.ca.gov/docs/pur/pur06rep/06_pur.htm) (verified 31 March 2010).

CDPR. 2007a. Plan for reducing emissions of volatile organic compounds from agricultural and commercial structural pesticides. CDPR, Sacramento, CA. Available at: <http://www.cdpr.ca.gov/docs/emon/vocs/vocproj/vocplan070523.pdf> (verified 31 March 2010).

CDPR. 2007b. Rule making package: text of proposed regulations. CDPR, Sacramento, CA. Available at: <http://www.cdpr.ca.gov/docs/legbills/rulepkgs/07-002/text.pdf> (verified 31 March 2010).

CDPR. 2009. Volatile Organic Compound (VOC) Emissions from Pesticides. Available online at <http://www.cdpr.ca.gov/docs/emon/vocs/vocproj/vocmenu.htm> (verified 31 March 2010).

Dungan, R.S., J. Gan, and S.R. Yates. 2001. Effect of temperature, organic amendment rate and moisture content on the degradation of 1,3-dichloropropene in soil. *Pest Manag. Sci.* 57:1107–1113.

Dungan, R.S., J. Gan, and S.R. Yates. 2003. Accelerated degradation of methyl isothiocyanate in soil. *Water Air Soil Pollut.* 142:299–310.

Dungan, R.S., S. Papiernik, and S.R. Yates. 2005. Use of composted animal manures to reduce 1,3-dichloropropene emissions. *J. Environ. Sci. Health. B.* 40:355-362.

- Gan, J., J.O. Becker, F.F. Ernst, C. Hutchinson, J.A. Knuteson, and S.R. Yates. 2000. Surface application of ammonium thiosulfate fertilizer to reduce volatilization of 1,3-dichloropropene from soil. *Pest. Manag. Sci.* 56:264-270.
- Gan, J., S.R. Yates, M.A. Anderson, W.F. Spencer, F.F. Ernst, and M.V. Yates. 1994. Effect of soil properties on degradation and sorption of methyl bromide in soil. *Chemosphere* 29:2685-2700.
- Gan, J., S.R. Yates, D. Wang, and F.F. Ernst. 1998c. Effect of application methods on 1,3-D volatilization from soil under controlled conditions. *J. Environ. Qual.* 27:432-438.
- Gan, J., S.R. Yates, D. Wang, W.F. Spencer. 1996. Effect of soil factors on methyl bromide volatilization after soil application. *Environ. Sci. Technol.* 30:1629-1636.
- Gan, J., S.R. Yates, F.F. Ernst, and W.A. Jury. 2000b. Degradation and volatilization of the fumigant chloropicrin after soil treatment. *J. Environ. Qual.* 29:1391-1397.
- Gan, J., S.R. Yates, J.O. Becker, and D. Wang. 1998a. Surface amendment of fertilizer ammonium thiosulfate to reduce methyl bromide emission from soil. *Environ. Sci. Technol.* 32:2438-2441.
- Gan, J., S.R. Yates, S. Papiernik, and D. Crowley. 1998b. Application of organic amendments to reduce volatile pesticide emissions from soil. *Environ. Sci. Technol.* 32:3094-3098.
- Gao, F., S.R. Yates, M.V. Yates, J. Gan, and F.F. Ernst. 1997. Design, fabrication, and application of a dynamic chamber for measuring gas emissions from soil. *Environ. Sci. Technol.* 31:148-153.
- Gao, S., A. Hendratna, R. Shenk, and T. Pflaum. 2006. Trapping efficiency of *cis*-1,3-dichloropropene by XAD-4 sorbent tubes for emission studies. p. 121(1-4) *In Proc. Ann. Int. Res. Conf. on MeBr Alternatives and Emission Reductions*. Orlando, FL, Nov. 6-9, 2006. Available at: <http://www.mbao.org/2006/06Proceedings/mbrpro06.html> (verified 31 March 2010).
- Gao, S. B.H. Hanson, D. Wang, G. Brown, R. Qin, H. Ajwa, S.R. Yates. 2010. Methods for minimizing emissions from pre-plant soil fumigation. *Calif. Agric.* (*in press*).
- Gao, S., and T.J. Trout. 2006. Using surface water application to reduce 1,3-dichloropropene emission from soil fumigation. *J. Environ. Qual.* 35:1040-1048.

- Gao, S., and T.J. Trout. 2007. Surface seals reduce 1,3-dichloropropene and chloropicrin emissions in field tests. *J. Environ. Qual.* 36:110-119.
- Gao, S., D. Wang, T. Pflaum, R. Qin, B. Hanson, G. Browne, H. Ajwa, and S. Yates. 2008a. Dynamic flux chamber systems for fumigant emission measurements. p. 22(1-4) *In Proc. Ann. Int. Res. Conf. on MeBr Alternatives and Emissions Reductions*, 11-14 November, 2008, Orlando, FL. Available at: <http://www.mbao.org/2008/Proceedings/mbrpro08.html> (verified 31 March 2010).
- Gao, S., R. Qin, B.D. Hanson, N. Tharayil, T.J. Trout, D. Wang, and J. Gerik. 2009. Effects of manure and water applications on 1,3-dichloropropene and chloropicrin emission in a field trial. *J. Agric. Food Chem.* 57:5428–5434.
- Gao, S., R. Qin, J.A. McDonald, B.D. Hanson, and T.J. Trout. 2008b. Field tests of surface seals and soil treatments to reduce fumigant emissions from shank-injection of Telone C35. *Sci. Total Environ.* 405:206-214.
- Gao, S., T.J. Trout, and S. Schneider. 2008c. Evaluation of fumigation and surface seal methods on fumigant emissions in an orchard replant field. *J. Environ. Qual.* 37:369-377.
- Gao, S. and D. Wang. Vapor flux measurements – chamber methods. Chapter 9 *In S. Saponaro, E. Sezenna, L. Bonomo (ed.) Vapor emission to outdoor air and enclosed spaces for human health risk assessment: site characterization, monitoring and modeling*. Nova Science Publishers, Inc., Hauppauge, NY. (in press)
- Guo, M., S.K. Papiernik, W. Zheng, S.R. Yates. 2004a. Effect of environmental factors on 1,3-dichloropropene hydrolysis in water and soil. *J. Environ. Qual.* 33:612-618.
- Guo, M., S.K. Papiernik, W. Zheng, S.R. Yates. 2003. Formation and extraction of persistent fumigant residues in soils. *Environ. Sci. Technol.* 37:1844-1849.
- Hanson, B.D., S. Gao, A. Shrestha, J. Gerik, and S. Schneider. 2007. Effects of surface seals on pest control efficacy with 1,3-dichloropropene / chloropicrin. p. 43(1-4) *In Proc. Ann. Int. Res. Conf. on MeBr Alternatives and Emissions Reductions*, 29 October-1 November, 2007, San Diego, CA. Available at: <http://www.mbao.org/2007/Proceedings/mbrpro07.html> (verified 31 March 2010).
- Jin, Y., and W.A. Jury. 1995. Methyl bromide diffusion and emission through soil columns under various management techniques. *J. Environ. Qual.* 24:1002-1009.

- Jury, W.A., W.F., Spencer, and W.J., Farmer. 1983. Behavior assessment model for trace organics in soil: I. Model description. *J. Environ. Qual.* 12:558-564.
- Kim, J.H., J.Y. Gan, W.J. Farmer, S.R. Yates, S.K. Papiernik, R.S. Dungan. 2003. Organic matter effects on phase partition of 1,3-dichloropropene in soil. *J. Agric. Food Chem.* 51:165-169.
- McDonald, J.A., S. Gao, R. Qin, T. J. Trout, and B.D. Hanson. 2008. The effect of chemical and manure amendment with water application and tarp on 1,3-dichloropropene emissions from soil. *Environ. Sci. Technol.* 42:398–402.
- McDonald, J.A., S. Gao, R. Qin, B.D. Hanson, T.J. Trout, and D. Wang. 2009. Effect of water seal on reducing 1,3-dichloropropene emissions from different soil textures. *J. Environ. Qual.* 38:712-718.
- McKenry, M.V., and I.J. Thomason. 1974. 1,3-dichloropropene and 1,2-dibromoethane compounds: I. Movement and fate as affected by various conditions in several soils. *Hilgardia* 42:383-421.
- Natural Resources Conservation Service (NRCS). 2004. Soil series classification database. USDA-NRCS, Lincoln, NE. Available at: <http://soils.usda.gov/technical/classification/scfile/index.html> (verified 31 March 2010).
- Noling, J.W. 2002. Reducing methyl bromide field application rates with plastic mulch technology. Publication ENY-046, Institute of Food and Agricultural Sciences, University of Florida. Available at: <http://edis.ifas.ufl.edu/IN403> (verified 31 March 2010).
- Noling, J.W., and D. Botts. 2009. Transitioning to methyl bromide alternatives: A current U.S. assessment. P. 2(1-5) *In Proc. Ann. Int. Res. Conf. on MeBr Alternatives and Emissions Reductions*, 10-13 November, 2009, San Diego, California, USA. Available at: <http://mbao.org/2009/Proceedings/002NolingJBottsDMBAO2009TransitioningtoMethylBromideAlternatives.pdf> (verified 31 March 2010).
- Papiernik, S.K., F.F. Ernst, R.S. Dungan, W. Zheng, M. Guo, and S.R. Yates. 2004. Chapter 13. Remediation of halogenated fumigant compounds in the root zone by subsurface application of ammonium thiosulfate. p. 169-179 *In J. Gan et al. (ed.). Pesticide decontamination and detoxification*. American Chemical Society, Washington D.C.

- Papiernik, S.K., and S.R. Yates. 2002. Effect of environmental conditions on the permeability of high density polyethylene film to fumigant vapors. *Environ. Sci. Technol.* 36:1833–1838.
- Qin R., S. Gao, B.D. Hanson, J.A. McDonald, T.J. Trout, and H. Ajwa. 2007. Effect of drip application of ammonium thiosulfate on fumigant degradation in soil columns. *J. Agric. Food Chem.* 55: 8193–8199.
- Qin, R., S. Gao, D. Wang, B.D. Hanson, T.J. Trout, and H. Ajwa. 2009. Relative effect of soil moisture on emissions and distribution of 1,3-dichloropropene and chloropicrin in soil columns. *Atmos. Environ.* 43:2449–2455.
- Reichman, R., and D.E. Rolston. 2002. Design and Performance of a Dynamic Gas Flux Chamber. *J. Environ. Qual.* 31:1774–1781.
- Segawa, R. 2008. California regulatory issues for fumigants. Presentation at Ann. Int. Res. Conf. on MeBr Alternatives and Emissions Reductions, 11-14 November, 2008, Orlando, FL. Available at: <http://www.mbao.org/2008/004segawa.pdf>.
- Shinde, D., A.G. Hornsby, R.S. Mansell, and M.R. Savabi. 2000. A simulation model for fate and transport of methyl bromide during fumigation in plastic-mulched vegetable soil beds. *Pest Manag. Sci.* 56:899-908.
- Sullivan, D.A., M.T. Holdsworth, and D.J. Hlinka. 2004. Control of off-gassing rates of methyl isothiocyanate from the application of metam-sodium by chemigation and shank injection. *Atmos. Environ.* 38:2457-2470.
- Thomas, J.E., L.H. Allen Jr., L.A. McCormack, J.C. Vu, D.W. Dickson, and L.T. Ou. 2003. Diffusion and emission of 1,3-dichloropropene in Florida sandy soil in microplots affected by soil moisture, organic matter, and plastic film. *Pest. Manag. Sci.* 60:390–398.
- Thomas, J.E., L.T. Ou, L.H. Allen, Jr., L.A. McCormack, J.C. Vu, and D.W. Dickson. 2006. Henry's law constants and mass transfer coefficients for methyl bromide and 1,3-dichloropropene applied to Florida sandy field soil. *Chemosphere* 62:980-988.
- Thomas, J.E., L.T. Ou, L.H. Allen, L.A. McCormack, J.C. Vu, and D.W. Dickson. 2004. Persistence, distribution, and emission of Telone C35 injected into a Florida sandy soil as affected by moisture, organic matter, and plastic film cover. *J. Environ. Sci. Heal. B.* 39:505-516.

- Trout, T. 2003. Impact of Township caps on the use of Telone in California. p. 109(1–8) *In* Proc. Ann. Intl. Res. Conf. on Methyl Bromide Alternatives and Emissions Reductions, 3-6 November, 2003, San Diego, CA. Available at: <http://www.mbao.org/2003/mbrpro03.html> (verified 31 March 2010).
- Trout T. 2006. Fumigant use in California – Response to the phase-out. p. 18(1–6). *In* Proceedings of Annual International Research Conference on Methyl Bromide Alternatives and Emissions Reductions, Orlando, FL, Nov. 6–9, 2006. Available at: <http://www.mbao.org/2006/06Proceedings/018TroutTmb-fumuse-06.pdf>. (verified 31 March 2010)
- Trout, T., S. Schneider, H. Aiwa, and J. Gartung. 2003. Fumigation and fallowing effects on replant problems in California peach. p. 55(1–5). *In* Proc. Ann. Int. Res. Conf. on MeBr Alternatives and Emissions Reductions, 3 – 6 Nov., 2003, San Diego, CA. Available at: <http://www.mbao.org/2003/mbrpro03.html> (verified 31 March 2010).
- U.S. Environmental Protection Agency (USEPA). 1994. Protection of stratosphere ozone. USEPA., Washington D.C. Available at: <http://www.epa.gov/fedrgstr/EPA-AIR/1994/October/Day-14/pr-47.html> (verified 31 March 2010).
- USEPA. 2009. Implementation of Risk Mitigation Measures for Soil Fumigant Pesticides. Available at: [http://www.epa.gov/oppsrrd1/reregistration/soil\\_fumigants/#ammendedreds](http://www.epa.gov/oppsrrd1/reregistration/soil_fumigants/#ammendedreds) (verified 31 March 2010).
- Wang, D., F.F. Ernst, S.R. Yates. 1999a. Automated sequential sampler for collection of highly volatile atmospheric contaminants. *J. Environ. Qual.* 28:345–349.
- Wang, D., S.R. Yates, F.F. Ernst, J. Gan, F. Gao, and J.O. Becker. 1997. Methyl bromide emission reduction with field management practices. *Environ. Sci. Technol.* 31:3017-3022.
- Wang, D., S.R. Yates, F.F. Ernst, J.A. Knuteson, and G.E. Brown, Jr. 2001. Volatilization of 1,3-dichloropropene under different application methods. *Water Air Soil Pollu.* 127:109–123.
- Wang, D., S.R. Yates, J. Gan, and J.A. Knuteson. 1999. Atmospheric volatilization of methyl bromide, 1,3-dichloropropene, and propargyl bromide through two plastic films: transfer coefficient and temperature effect. *Atmos. Environ.* 33:401–407.



- Wang, D., S.W. Fraedrich, J. Juzwik, K. Spokas, Y. Zhang, and W.C. Koskinen. 2006. Fumigant distribution in forest nursery soils under water seal and plastic film after application of dazomet, metam-sodium and chloropicrin. *Pest Manag. Sci.* 62:263–273
- Wang, Q., J. Gan, S.K. Papiernik, and S.R. Yates. 2000. Transformation and detoxification of halogenated fumigants by ammonium thiosulfate. *Environ. Sci. Technol.* 34: 3717–3721.
- Xu, J.M., J. Gan, S.K. Papiernik, J.O. Becker, and S.R. Yates. 2003. Incorporation of fumigants into soil organic matter. *Environ. Sci. Technol.* 37:1288-1291.
- Yates, S.R., J. Gan, and S.K. Papiernik. 2003. Environmental fate of methyl bromide as a soil fumigant. *Rev. Environ. Contam. Toxicol.* 177:45–122.
- Yates, S.R., J. Gan, S.K. Papiernik, R. Dungan, and D. Wang. 2002. Reducing fumigant emissions after soil application. *Phytopathology* 92:1344-1348.
- Yates, S.R., J. Knuteson, W. Zheng, and Q. Wang. Effect of Organic Material on Field-scale Emissions of 1,3-Dichloropropene (1,3-D). *J. Environ. Qual.* (in press).
- Zheng W., J. Gan, S.K. Papiernik, and S.R. Yates. 2007. Identification of volatile/semivolatile products derived from chemical remediation of *cis*-1,3-dichloropropene by thiosulfate. *Environ. Sci. Technol.* 41:6454-6549.
- Zheng, W., S.K. Papiernik, M. Guo, and S.R. Yates. 2003. Accelerated degradation of methyl iodide by agrochemicals. *J. Agric. Food Chem.* 51:673–679.
- Zheng, W., S.R. Yates, S.K. Papiernik, and Q. Wang. 2006. Reducing 1,3-dichloropropene emissions from soil columns amended with thiourea. *Environ. Sci. Technol.* 40:2402–2407.